

LED floodlight without sensor - Professional Line

XLED PRO 240

V2 black

EAN 4007841 068097

Article number 068097



LED

3000 K



IP44



networkable via
cable



energy saving

5 years

manufacturer's
warranty steinel-
professional.de/
garantie



CE



Light source not
exchangeable



Control gear not
exchangeable



ENEC 05

Function description

Day-bright illumination throughout: the XLED PRO 240 outdoor floodlight without motion detector. With fully swivelling LED flat panel and opal diffuser. 2124 lm, 3000 K, 19,3 W. Available in black, white and anthracite.

Technical specifications

Dimensions (L x W x H)	161 x 180 x 199 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	black
PU1, EAN	4007841068097
Application, place	Outdoors
Application, room	outdoors, all round the building, terrace / balcony, courtyard & driveway
Includes corner wall mount	No
Installation site	wall, corner
Installation	Wall, corner, Surface wiring
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	from -20 up to 40 °C
Housing material	HCMC

Mains power supply	220 – 240 V / 50 – 60 Hz
Luminous flux total product	2124 lm
Measured luminous flux (360°)	2124 lm
Total product efficiency	110 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 60000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)
Soft light start	No
Basic light level function	No
Main light adjustable	No
Interconnection	No
Output	19,3 W
Colour Rendering Index CRI	= 82
Product category	LED floodlight without sensor
Energieeffizienzklasse Lichtquelle	E

<https://www.steinel.de>

Subject to technical modifications

01.2025 Page 1 from 2

XLED PRO 240

V2 black

EAN 4007841 068097

Article number 068097




Technical specifications

Cover material

Plastic, opal

Dimension Drawing

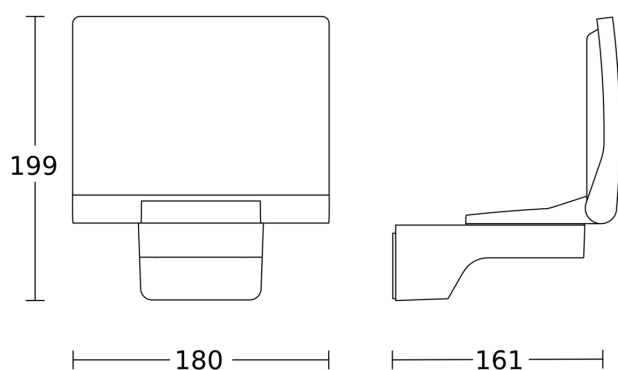

Master/slave interconnection circuit diagram

