

LED indoor light without sensor - Professional Line

RS PRO P1 flat

Neutral white

EAN 4007841 069698

Article number 069698



LED

30 years (Ø 4,5h / day)



indoor



connectable with
master



IP54



energy saving



CE

5 years

manufacturer's
warranty steinel.de/
garantie



Light source not
exchangeable



Control gear not
exchangeable

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P1 flat integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the sensor version by cable. Output: 8,2 W with 930 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	272 x 64 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	Neutral white
PU1, EAN	4007841069698
Colour	white
Installation site	wall, ceiling
Installation	Ceiling
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	from -10 up to 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Luminous flux total product	930 lm

Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Main light adjustable	No
Interconnection via	Cable
Lifetime LED according to IEC-62717 (L70)	100.000 h
Lifetime LED according to IEC-62717 (L80)	73.000 h
Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Lifetime LED according to IES TM-21 (L80)	>60.000 h
Fuse protection B10	54
Fuse protection B16	87
Fuse protection C10	90
Fuse protection C16	145
Output	8,2 W
Colour Rendering Index CRI	= 82

<https://www.steinel.de>

Subject to technical modifications

03.2025 Page 1 from 2

RS PRO P1 flat

Neutral white
EAN 4007841 069698
Article number 069698




Technical specifications


Total product efficiency	113 lm/W
Colour temperature	4000 K
Lamp	LED cannot be replaced

Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	13 A
IP-rating, ceiling	IP54
Product category	LED indoor light without sensor


Dimension Drawing

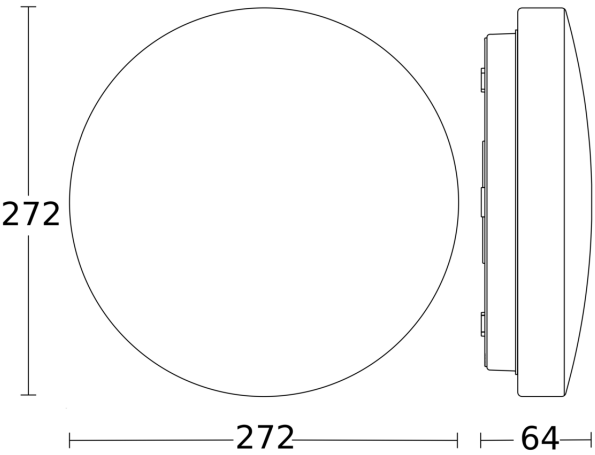

Master circuit diagram



Master/slave interconnection circuit diagram

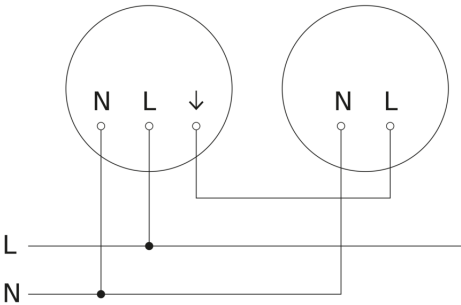

Master/slave interconnection circuit diagram

