

LED indoor light without sensor - Professional Line

RS PRO P1 flat

Neutral white

EAN 4007841 069698

Article number 069698



indoor



connectable with master




IP54

5 years

manufacturer's warranty steinel.de/
garantie



Light source not exchangeable



Control gear not exchangeable

Function description

Circular classic. Perfect shape. The perfect indoor light as version without sensor. The RS PRO P1 flat integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the sensor version by cable. Output: 8,2 W with 930 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	272 x 64 mm	Base	without
With lamp	Yes, STEINEL LED system	LED cooling system	Passive Thermo Control
With motion detector	No	Soft light start	Yes
Manufacturer's Warranty	5 years	Main light adjustable	No
Version	Neutral white	Interconnection via	Cable
PU1, EAN	4007841069698	Lifetime LED according to IEC-62717 (L70)	100.000 h
Colour	white	Lifetime LED according to IEC-62717 (L80)	73.000 h
Installation site	wall, ceiling	LED service life according to IES TM-21 (L70)	>60.000 h
Installation	Ceiling	Lifetime LED according to IES TM-21 (L80)	>60.000 h
Impact resistance	IK03	Fuse protection B10	54
IP-rating	IP54	Fuse protection B16	87
Protection class	II	Fuse protection C10	90
Ambient temperature	from -10 up to 40 °C	Fuse protection C16	145
Housing material	Plastic	Output	8,2 W
Cover material	Plastic, opal		
Mains power supply	220 – 240 V / 50 – 60 Hz		
Luminous flux total product	930 lm		

<https://www.steinel.de>

Subject to technical modifications

09.2026 Page 1 from 2

RS PRO P1 flat

Neutral white
EAN 4007841 069698
Article number 069698




Technical specifications


Total product efficiency	113 lm/W
Colour temperature	4000 K
Lamp	LED cannot be replaced

Colour Rendering Index CRI	= 82
Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	13 A
IP-rating, ceiling	IP54
Product category	LED indoor light without sensor


Dimension Drawing

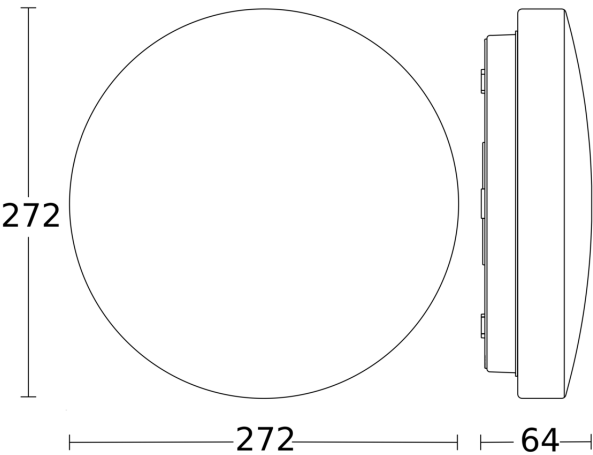

Master circuit diagram



Master/slave interconnection circuit diagram

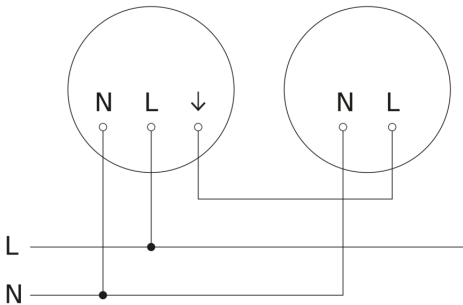

Master/slave interconnection circuit diagram

