

RS PRO P1

V3 Neutral white

EAN 4007841 056049

Article number 056049



Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P1 integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the sensor version by cable. Output: 8,2 W with 974 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	280 x 110 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	Neutral white
PU1, EAN	4007841056049
Colour	white
Installation site	wall, ceiling
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	from -10 up to 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Luminous flux total product	974 lm
Total product efficiency	119 lm/W
Colour temperature	4000 K
Lamp	LED cannot be replaced

Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Main light adjustable	No
Interconnection via	Cable
Lifetime LED according to IEC-62717 (L70)	100.000 h
Lifetime LED according to IEC-62717 (L80)	73.000 h
Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Lifetime LED according to IES TM-21 (L80)	>60.000 h
Fuse protection B10	54
Fuse protection B16	87
Fuse protection C10	90
Fuse protection C16	145
Output	8,2 W
Colour Rendering Index CRI	= 82
Photobiological safety in accordance with EN 62471	RG1
Starting current, maximum	13 A
IP-rating, ceiling	IP54

RS PRO P1

V3 Neutral white


EAN 4007841 056049

Article number 056049


Product category

LED indoor light without sensor


Dimension Drawing

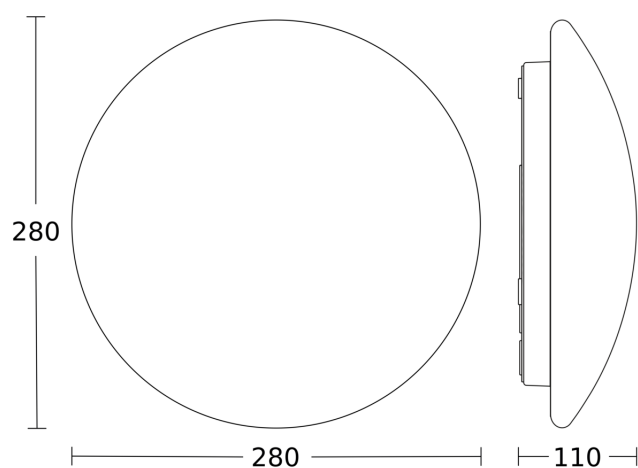

Master circuit diagram



Master/slave interconnection circuit diagram

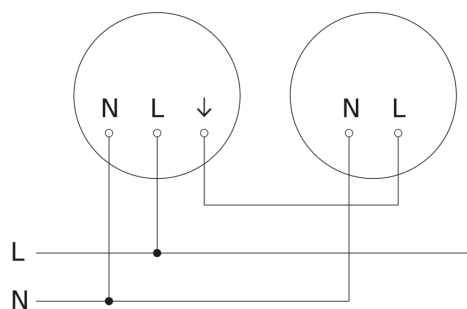

Master/slave interconnection circuit diagram

