

LED indoor light without sensor - Professional Line

RS PRO P2 flat

Neutral white

EAN 4007841 069759

Article number 069759



LED

30 years (Ø 4,5h / day)



indoor



connectable with
master



IP54



energy saving



CE

5 years

manufacturer's
warranty steinel.de/
garantie



Light source not
exchangeable



Control gear not
exchangeable

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P2 flat integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the sensor version by cable. Output: 14,1 W with 1684 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	322 x 68 mm	Base	without
With lamp	Yes, STEINEL LED system	LED cooling system	Passive Thermo Control
With motion detector	No	Soft light start	Yes
Manufacturer's Warranty	5 years	Main light adjustable	No
Version	Neutral white	Interconnection via	Cable
PU1, EAN	4007841069759	Lifetime LED according to IEC-62717 (L70)	100.000 h
Colour	white	Lifetime LED according to IEC-62717 (L80)	73.000 h
Installation site	wall, ceiling	Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Installation	Ceiling	Lifetime LED according to IES TM-21 (L80)	>60.000 h
Impact resistance	IK03	Fuse protection B10	54
IP-rating	IP54	Fuse protection B16	87
Protection class	II	Fuse protection C10	90
Ambient temperature	from -10 up to 40 °C	Fuse protection C16	145
Housing material	Plastic	Output	14,1 W
Cover material	Plastic, opal	Colour Rendering Index CRI	= 82
Mains power supply	220 – 240 V / 50 – 60 Hz		
Luminous flux total product	1684 lm		

<https://www.steinel.de>

Subject to technical modifications

04.2025 Page 1 from 2

RS PRO P2 flat

Neutral white

EAN 4007841 069759

Article number 069759




Technical specifications

Total product efficiency	119 lm/W
Colour temperature	4000 K
Lamp	LED cannot be replaced


Photobiological safety in accordance with
EN 62471

Starting current, maximum	13 A
IP-rating, ceiling	IP54
Product category	LED indoor light without sensor


Dimension Drawing

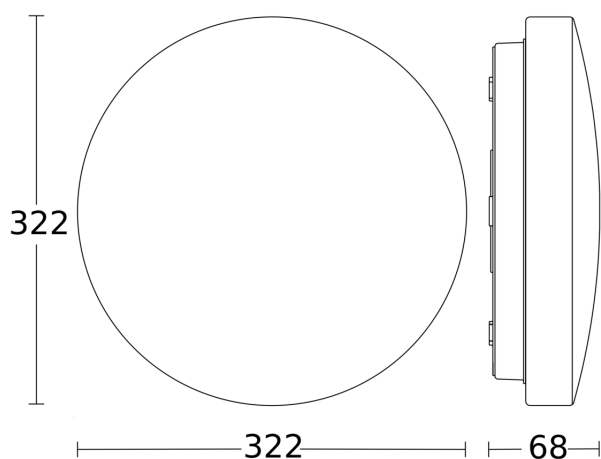

Master circuit diagram



Master/slave interconnection circuit diagram

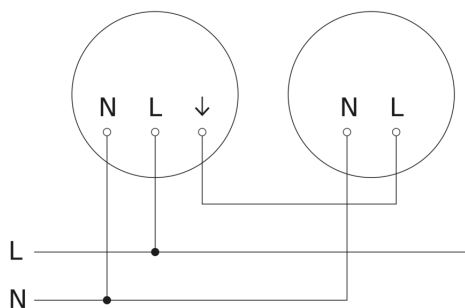

Master/slave interconnection circuit diagram

