

LED indoor light without sensor - Professional Line

# RS PRO P2 flat

warm white

EAN 4007841 069766

Article number 069766



LED

30 years (Ø 4,5h / day)



indoor



connectable with  
master



IP54



energy saving



CE

5 years

manufacturer's  
warranty steinel.de/  
garantie



Light source not  
exchangeable



Control gear not  
exchangeable

## Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P2 flat integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the sensor version by cable. Output: 14 W with 1653 lm, 3000 K.

## Technical specifications

Dimensions (Ø x H)	322 x 68 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	warm white
PU1, EAN	4007841069766
Colour	white
Installation site	wall, ceiling
Installation	Ceiling
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	from -10 up to 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Luminous flux total product	1653 lm

Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Main light adjustable	No
Interconnection via	Cable
Lifetime LED according to IEC-62717 (L70)	100.000 h
Lifetime LED according to IEC-62717 (L80)	73.000 h
Lebensdauer LED nach IES TM-21 (L70)	>60.000 h
Lifetime LED according to IES TM-21 (L80)	>60.000 h
Fuse protection B10	54
Fuse protection B16	87
Fuse protection C10	90
Fuse protection C16	145
Output	14 W
Colour Rendering Index CRI	= 82

<https://www.steinel.de>

Subject to technical modifications

04.2025 Page 1 from 2

# RS PRO P2 flat

warm white

EAN 4007841 069766

Article number 069766




## Technical specifications

Total product efficiency	118 lm/W
Colour temperature	3000 K
Lamp	LED cannot be replaced


Photobiological safety in accordance with EN 62471 <sup>RG1</sup>

Starting current, maximum	13 A
IP-rating, ceiling	IP54
Product category	LED indoor light without sensor


## Dimension Drawing

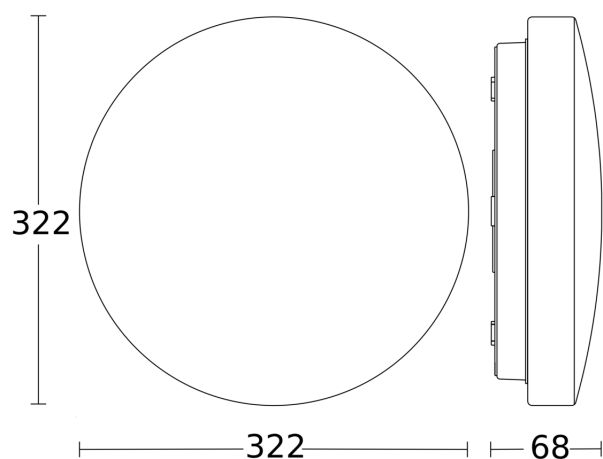

## Master circuit diagram



## Master/slave interconnection circuit diagram

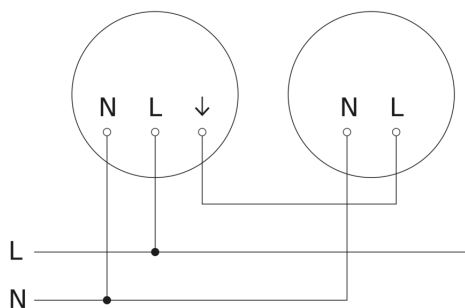

## Master/slave interconnection circuit diagram

