

LED indoor light without sensor - Professional Line

RS PRO P2

Neutral white

EAN 4007841 056087

Article number 056087



LED

4000 K



IP54



soft light start



connectable with
master



energy saving

5 years

manufacturer's
warranty steinel-
professional.de/
garantie



Light source not
exchangeable



Control gear not
exchangeable



CE

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P2 integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the version with sensor by cable. Output: 14,1 W with 1708 lm, 4000 K.

Technical specifications

Dimensions (Ø x H)	320 x 110 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	Neutral white
PU1, EAN	4007841056087
Colour	white
Installation site	wall, ceiling
Installation	Ceiling
Impact resistance	IK03
IP-rating	IP54
Protection class	II
Ambient temperature	from -10 up to 40 °C
Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Luminous flux total product	1708 lm

Base	without
LED cooling system	Passive Thermo Control
Soft light start	Yes
Main light adjustable	No
Interconnection via	Cable
Lifetime LED according to IEC-62717 (L70)	100.000 h
Lifetime LED according to IEC-62717 (L80)	73.000 h
Lebensdauer LED nach IES TM-21 (L70)	60.000 h
Lifetime LED according to IES TM-21 (L80)	60.000 h
Fuse protection B10	54
Fuse protection B16	87
Fuse protection C10	90
Fuse protection C16	145
Output	14,1 W
Colour Rendering Index CRI	= 82

<https://www.steinel.de>

Subject to technical modifications

04.2025 Page 1 from 4

RS PRO P2

Neutral white

EAN 4007841 056087

Article number 056087



Technical specifications

Total product efficiency	121 lm/W
--------------------------	----------

Colour temperature	4000 K
--------------------	--------

Lamp	LED cannot be replaced
------	------------------------

Photobiological safety in accordance with EN 62471	RG1
--	-----

Starting current, maximum	13 A
---------------------------	------

IP-rating, ceiling	IP54
--------------------	------

Product category	LED indoor light without sensor
------------------	---------------------------------

RS PRO P2


Neutral white

EAN 4007841 056087


Article number 056087



Dimension Drawing

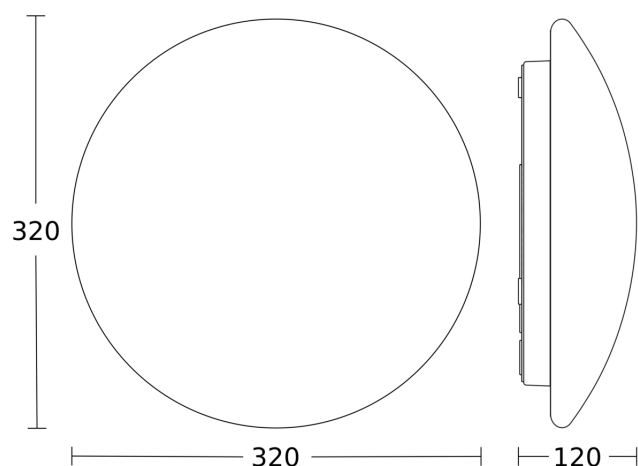


Light Distribution Curve




Output	14,1 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Measured luminous flux (360°)	1708 lm
Colour temperature	4000 K
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control

Master circuit diagram



Master/slave interconnection circuit diagram

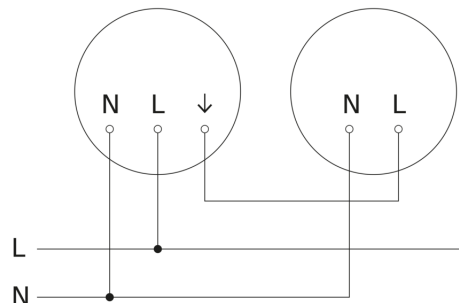

RS PRO P2

Neutral white

EAN 4007841 056087

Article number 056087



Master/slave interconnection circuit diagram

