

RS PRO P3

Neutral white

EAN 4007841 056124

Article number 056124



LED

4000 K



IP54



soft light start

connectable with
master

energy saving

5 years

manufacturer's
warranty steinel-
professional.de/
garantie

CE



ENEC 10



VDE

Function description

Circular classic. Perfect shape. Perfect efficiency. The perfect indoor light as version without sensor. The RS PRO P3 integrates harmoniously into corridors, hallways and stairwells. It combines timeless design and extremely easy installation with pioneering technology and can be interconnected with the version with sensor by cable. Output: 17,8 W with 2188 lm, 4000 K.

Technical specifications

| | |
|-----------------------------|--------------------------|
| Dimensions (Ø x H) | 400 x 142 mm |
| With lamp | Yes, STEINEL LED system |
| With motion detector | No |
| Manufacturer's Warranty | 5 years |
| Version | Neutral white |
| PU1, EAN | 4007841056124 |
| Colour | white |
| Installation site | wall, ceiling |
| Installation | Ceiling |
| Impact resistance | IK03 |
| IP-rating | IP54 |
| Protection class | II |
| Ambient temperature | from -10 up to 40 °C |
| Housing material | Plastic |
| Cover material | Plastic, opal |
| Mains power supply | 220 – 240 V / 50 – 60 Hz |
| Luminous flux total product | 2188 lm |

| | |
|---|------------------------|
| Base | without |
| LED cooling system | Passive Thermo Control |
| Soft light start | Yes |
| Main light adjustable | No |
| Interconnection via | Cable |
| Lifetime LED according to IEC-62717 (L70) | 100.000 h |
| Lifetime LED according to IEC-62717 (L80) | 74.000 h |
| Lebensdauer LED nach IES TM-21 (L70) | >60.000 h |
| Lifetime LED according to IES TM-21 (L80) | >60.000 h |
| Fuse protection B10 | 54 |
| Fuse protection B16 | 87 |
| Fuse protection C10 | 90 |
| Fuse protection C16 | 145 |
| Output | 17,8 W |
| Colour Rendering Index CRI | = 82 |

RS PRO P3

Neutral white

EAN 4007841 056124

Article number 056124


Technical specifications

| | |
|--------------------------|------------------------|
| Total product efficiency | 123 lm/W |
| Colour temperature | 4000 K |
| Lamp | LED cannot be replaced |


Photobiological safety in accordance with
EN 62471

| | |
|---------------------------|---------------------------------|
| Starting current, maximum | 13 A |
| IP-rating, ceiling | IP54 |
| Product category | LED indoor light without sensor |


Dimension Drawing

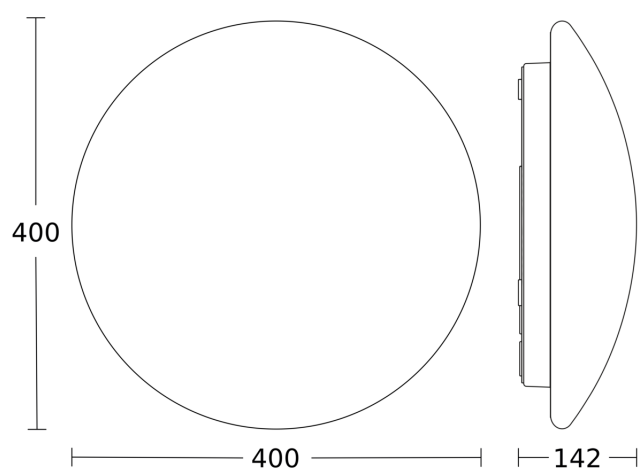

Master circuit diagram



Master/slave interconnection circuit diagram

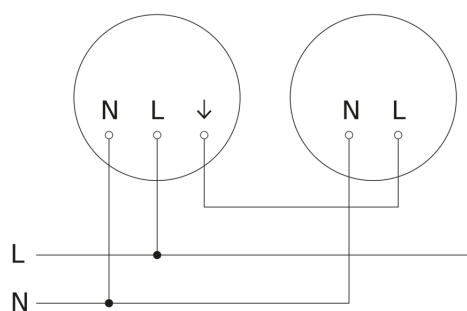

Master/slave interconnection circuit diagram

