

RS PRO A30 SC

Neutral white anthracite
EAN 4007841 085346
Article number 085346



Function description

Elegant and robust. Sophisticated design for demanding environments: Equipped with a powerful high-frequency sensor and an aluminium chassis that is as attractive as it is robust, the A series is ideal for pergolas or similar applications thanks to its IK10 impact resistance and tested IP54 protection class. In combination with our Connected Lighting System, the luminaires can be controlled using a wireless push-button. Semi-automatic operation, timer functions, the setting of neighbour groups and tracking light can also be implemented quickly and easily using Connected Lighting. Of course, cross-series networking is also possible at any time without any problems.

Technical specifications

Dimensions (Ø x H)	331 x 69 mm	Photo-cell controller	Yes
With lamp	Yes, STEINEL LED system	Transmitter power	< 1 mW
With motion detector	Yes	Luminous flux total product	2745 lm
Manufacturer's Warranty	5 years	Total product efficiency	132,6 lm/W
Settings via	Bluetooth, App	Colour temperature	4000 K
With remote control	No	Colour variation LED	SDCM3
Version	Neutral white anthracite	Lamp	LED cannot be replaced
PU1, EAN	4007841085346	Base	without
Application, place	Indoors	LED cooling system	Passive Thermo Control
Application, room	corridor / aisle, function room / ancillary room, warehouse, kitchenette, stairwell, changing room, WC / washroom	Soft light start	Yes
Colour	Anthracite	Continuous light	selectable
includes sheet of self-adhesive numbers	No	Functions	Selecting programmed lighting scenarios, Motions sensor, DIM function, Adjustable fade time when switching on and off, Semi-/fully automatic, Neighbouring group function, Encrypted communication, Timer
Installation site	ceiling, wall		

RS PRO A30 SC

Neutral white anthracite
 EAN 4007841 085346
 Article number 085346



Technical specifications

Installation	Surface wiring, Ceiling	Twilight setting	2 – 2000 lx
Impact resistance	IK10	Time setting	10 s – 60 Min.
IP-rating	IP54	Basic light level function	Yes
Protection class	II	Basic light level function time	1-60 min
Ambient temperature	from -20 up to 40 °C	Main light adjustable	0 - 100 %
Housing material	Aluminium	Twilight setting TEACH	Yes
Cover material	PC, opal	Interconnection	Yes
Mains power supply	220 – 240 V / 50 – 60 Hz	Type of interconnection	Master/master
Mounting height max.	4,00 m	Interconnection via	Bluetooth Mesh
HF-system	5,8 GHz	Lifetime LED according to IEC-62717 (L70)	> 60.000 Std.
Slave modeselectable	Yes	Basic light level function in per cent	0 – 100 %
Detection	also through glass, wood and stud walls	Output	20,7 W
Capability of masking out individual segments	No	Colour Rendering Index CRI	= 80
Electronic scalability	Yes	Angle of aperture	160 °
Mechanical scalability	No	IP-rating, ceiling	IP54
Reach, radial	Ø 8 m (50 m²)	Detection angle	360 °
Reach, tangential	Ø 8 m (50 m²)	Product category	Sensor-switched LED indoor light

Optional system components

EAN 4007841 084653	Wireless push button PB2-Bluetooth
EAN 4007841 084660	Wireless push button PB4-Bluetooth

RS PRO A30 SC


Neutral white anthracite

EAN 4007841 085346

Article number 085346



Detection Zone

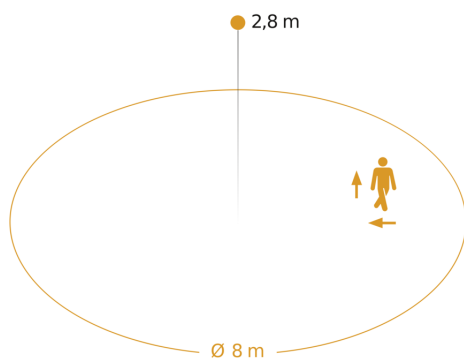

Possible mounting height: 2,00 m – 4,00 m
Orange: radial and tangential

Dimension Drawing

