

HF 360-2

DALI-2 APC - concealed
EAN 4007841 086596
Article number 086596



high frequency
sensor 360°



max. Ø 12 m



IP20



ideal 1 - 2,5 m



2 - 2000 lux



5 sec - 60 min



iQ-mode



Teach mode



KNX



CE

Function description

Smart surveillance professional. The HF 360-2 from the new Control PRO 2 range. Modern look and intelligent 360° HF sensor technology – ideal for stairwells and toilet facilities with cubicles. Conveniently adjusted and interconnected via Bluetooth. Interfaces: COM1, COM2, DALI-2 APC, DALI-2 IPD, KNX, IP and BT IPD (Slave). Mounting height up to 4 m. Reach: 12 m.

Technical specifications

Dimensions (L x W x H)	61 x 103 x 103 mm
Manufacturer's Warranty	5 years
Settings via	Bluetooth Mesh
With remote control	No
Version	DALI-2 APC - concealed
PU1, EAN	4007841086596
Type	Presence detector
Application, place	Indoors
Application, room	function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	from -25 up to 50 °C

Optimum mounting height	2,8 m
HF-system	5,8 GHz
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 12 m (113 m ²)
Reach, tangential	Ø 12 m (113 m ²)
Transmitter power	< 1 mW
Functions	Semi-/fully automatic, Constant- lighting control, Lighting scenario, Master/slave override, Neighbouring group function, TouchDIM function

HF 360-2

DALI-2 APC - concealed
EAN 4007841 086596
Article number 086596



Technical specifications

Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Power supply, detail	max. 64 users
Steuer Ausgang, Dali	Addressable / broadcast 64 electronic ballasts
Technology, sensors	High frequency, Photo-cell controller
Mounting height	2,5 – 4 m
Mounting height max.	4,00 m

Twilight setting	2 – 2000 lx
Time setting	30 s – 60 Min.
Basic light level function	Yes
Basic light level function time	10 min, all day, all night
Main light adjustable	Yes
Twilight setting TEACH	Yes
Constant-lighting control	Yes
Interconnection	Yes
Interconnection via	Bluetooth Mesh
Product category	Presence detector


Optional system components

EAN 4007841 082123	Pushbutton coupler PC4-DALI-2
EAN 4007841 082109	Relais REL5A-DALI-2
EAN 4007841 084653	Wireless push button PB2-Bluetooth
EAN 4007841 084660	Wireless push button PB4-Bluetooth
EAN 4007841 067342	PC4 Bluetooth push-button coupler
EAN 4007841 067342	PC4 Bluetooth push-button coupler

HF 360-2


DALI-2 APC - concealed
EAN 4007841 086596
Article number 086596

Detection Zone

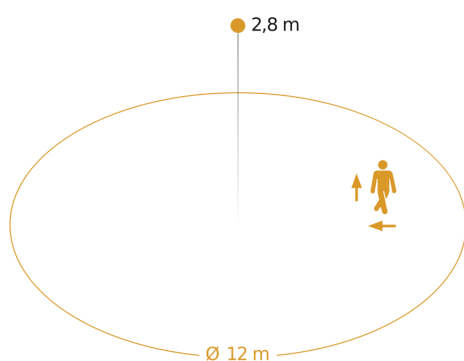


Possible mounting height: 2,50 m – 4,00 m
Orange: radial and tangential

Dimension Drawing

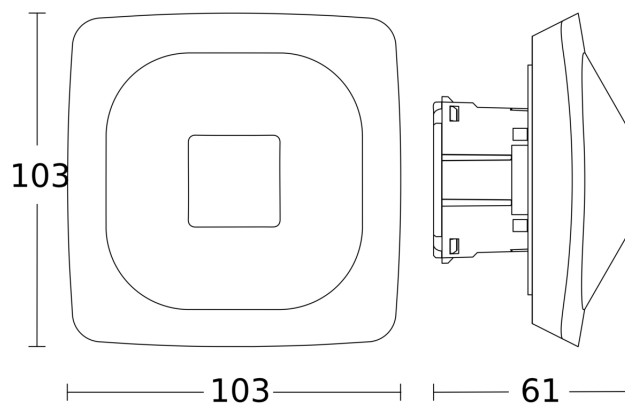

Master circuit diagram



Master/slave interconnection circuit diagram

