


L 14 S

with motion detector
EAN 4007841 094263
Article number 094263




Max. 15 W



max. 15 W E27

outdoor light
180°


max. 10 m





max. 10 m



2 - 2000 lux



8 sec - 35 min

90° vertical
Light source
replaceable by end
userControl gear not
exchangeable

IP44

Function description

Clearly visible. Thoughtfully designed. The L 14 S outdoor sensor light combines clean, timeless design with a clearly visible house number and smart motion-activated lighting. Features a swivelling 180° sensor in housing colour with up to 10 m range, impact-resistant, UV-resistant material and an E27 socket for flexible bulb choice. Includes house number template. For those who value form, function and visibility. Also available without sensor.

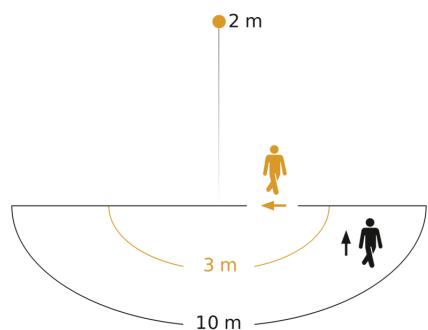
Technical specifications

Dimensions (L x W x H)	125 x 125 x 275 mm
With lamp	No
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Version	with motion detector
PU1, EAN	4007841094263
Application, place	Outdoors
Application, room	outdoors
Colour	Anthracite
Colour, RAL	7016
Installation site	wall
Impact resistance	IK05
IP-rating	IP44
Protection class	II
Ambient temperature	from -20 up to 40 °C
Housing material	Plastic

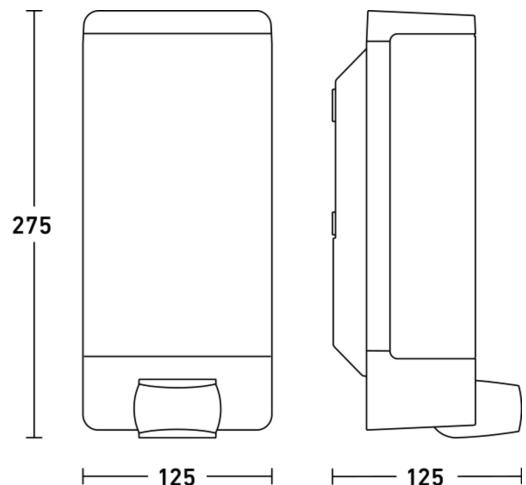
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (14 m ²)
Reach, tangential	r = 10 m (157 m ²)
Photo-cell controller	Yes
Cover material	sticker
Base	E27
Soft light start	No
Functions	Motions sensor, Light sensor
Twilight setting	2 - 2000 lx
Time setting	8 s - 35 Min.
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Interconnection	Yes

Technical specifications

Cover material	PMMA, opal	Type of interconnection	Sensor/slave
Mains power supply	230 – 240 V / 50 Hz	Interconnection via	Cable
Output	15 W	Optimum mounting height	2 m
Mounting height max.	3,00 m	Detection angle	180 °
Slave modeselectable	No	Product category	Sensor-switched outdoor light

Detection Zone

Possible mounting height: 1,80 m – 3,00 m
 Orange: radial
 Black: tangential

Dimension Drawing**Circuit diagram**