

E27 Sensor-switched outdoor light

L 14 S

with motion detector
EAN 4007841 094263
Article number 094263



Max. 15 W



outdoor light



infrared sensor
180°



max. 10 m



2 - 2000 lux



8 sec - 35 min



90° vertical



Light source
replaceable by end
user



Control gear not
exchangeable



IP44

Function description

Clearly visible. Thoughtfully designed. The L 14 S outdoor sensor light combines clean, timeless design with a clearly visible house number and smart motion-activated lighting. Features a swivelling 180° sensor in housing colour with up to 10 m range, impact-resistant, UV-resistant material and an E27 socket for flexible bulb choice. Includes house number template. For those who value form, function and visibility. Also available without sensor.

Technical specifications

Dimensions (L x W x H)	125 x 125 x 275 mm	Capability of masking out individual segments	Yes
With lamp	No	Electronic scalability	No
Manufacturer's Warranty	3 years	Mechanical scalability	No
Settings via	Potentiometers	Reach, radial	r = 3 m (14 m ²)
With remote control	No	Reach, tangential	r = 10 m (157 m ²)
Version	with motion detector	Photo-cell controller	Yes
PU1, EAN	4007841094263	Cover material	sticker
Application, place	Outdoors	Base	E27
Application, room	outdoors	Soft light start	No
Colour	Anthracite	Functions	Motions sensor, Light sensor
Colour, RAL	7016	Twilight setting	2 – 2000 lx
Installation site	wall	Time setting	8 s – 35 Min.
Impact resistance	IK05	Basic light level function	No
IP-rating	IP44	Main light adjustable	No
Protection class	II	Twilight setting TEACH	No
Ambient temperature	from -20 up to 40 °C	Interconnection	Yes
Housing material	Plastic		

<https://www.steinel.de>

Subject to technical modifications

03.2026 Page 1 from 2

E27 Sensor-switched outdoor light

L 14 S

with motion detector
EAN 4007841 094263
Article number 094263




Technical specifications

Cover material	PMMA, opal
Mains power supply	230 – 240 V / 50 Hz
Output	15 W
Mounting height max.	3,00 m
Slave modeselectable	No


Type of interconnection	Sensor/slave
Interconnection via	Cable
Optimum mounting height	2 m
Detection angle	180 °
Product category	E27 Sensor-switched outdoor light

Detection Zone

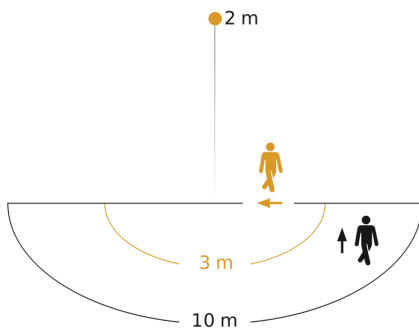

Possible mounting height: 1,80 m - 3,00 m
Orange: radial
Black: tangential

Dimension Drawing

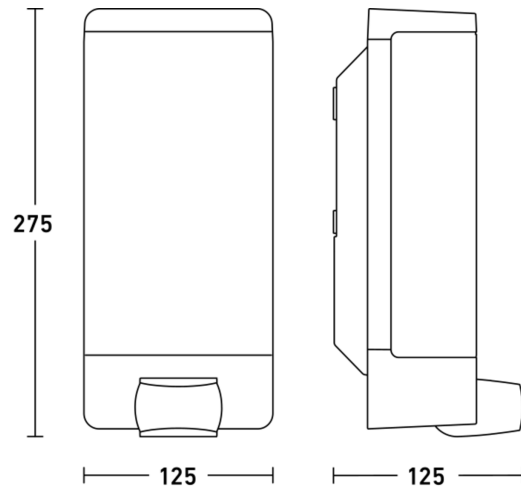

Circuit diagram

