


24V-Garden LED globe light

# Sphera C 24V Starter Set

300 mm

EAN 4007841 094829

Article number 094829

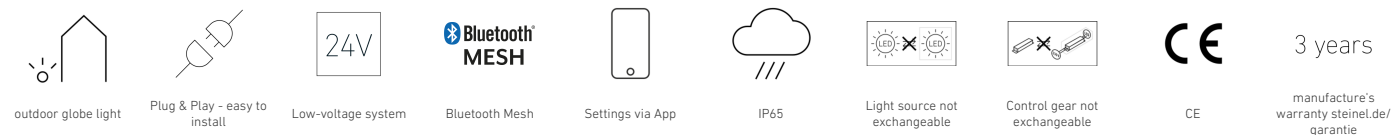

## Function description

Starter Set: Set up, connect and enjoy instantly. With the "Sphera C 24V Starter Set" you bring stylish light ambience straight into your garden. The set includes one "Sphera C 24V" globe light (Ø 300 mm) with adjustable light colour, a 35W power supply and a 1 m connection cable. The harmonious round shape makes the "Sphera" a real eye-catcher – whether placed on its own, integrated into flower beds or used as an accent on the terrace. Thanks to Plug & Play, installation is quick and easy, while control via the STEINEL Connect App offers maximum convenience. Everything you need for atmospheric lighting with style is already included in this set.

## Technical specifications

With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
Settings via	Bluetooth Mesh
With remote control	No
Version	300 mm
PU1, EAN	4007841094829
Application, place	Outdoors
Application, room	outdoors, garden, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Package content	1
Installation site	Floor
Impact resistance	IK07
IP-rating	IP65
Ambient temperature	from -20 up to 40 °C

Colour temperature	all colors + 1800-4000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 60000 h
Continuous light	selectable
Twilight setting	2 – 2000 lx
Main light adjustable	10 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes
Interconnection via	Bluetooth Mesh
Colour Rendering Index CRI	= 84
R9-Farb wiedergabeindex	11
Product category	24V-Garden LED globe light
Ausführung des Betriebsgeräts	without sensor, with Bluetooth
Anzahl der Ausgänge	2
Geeignet für Konstantspannung	Yes

<https://www.steinel.de>

Subject to technical modifications

06.2026 Page 1 from 2

24V-Garden LED globe light

# Sphera C 24V Starter Set

300 mm

EAN 4007841 094829

Article number 094829



## Technical specifications

Housing material	Plastic
Cover material	Plastic, structured
Output	5,04 W
Average rated life expectancy of power supply unit at 25°C	> 60000 h
Photo-cell controller	Yes
Luminous flux total product	529 lm
Measured luminous flux (360°)	529 lm

Geeignet für Konstantstrom	No
Ausgangsleistung	35 W
Ausgangsstrom	1,45 mA
Ausgangsspannung	24 V
Cord length	0,65 m

## Accessories

EAN 4007841 088620	Wireless pushbutton TapDuo C
EAN 4007841 089290	Cable 24V 5m
EAN 4007841 089276	Cable 24V 1m
EAN 4007841 089283	Cable 24V 2,5m
EAN 4007841 089269	Power Supply 24V 100 W
EAN 4007841 089252	Power Supply 24V 35 W
EAN 4007841 091491	Ground spike Sphera 24V
EAN 4007841 089313	Cross Connector 24V
EAN 4007841 089306	T-Connector 24V

## Dimension Drawing

