


24V-Garden LED globe light

Sphera C 24V Starter Set

400 mm

EAN 4007841 094836

Article number 094836

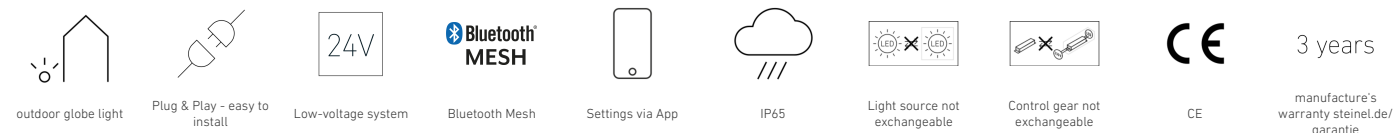

Function description

Starter Set: Set up, connect and enjoy instantly. With the "Sphera C 24V Starter Set" you bring stylish light ambience straight into your garden. The set includes one "Sphera C 24V" globe light (Ø 400 mm) with adjustable light colour, a 35W power supply and a 1 m connection cable. The harmonious round shape makes the "Sphera" a real eye-catcher – whether placed on its own, integrated into flower beds or used as an accent on the terrace. Thanks to Plug & Play, installation is quick and easy, while control via the STEINEL Connect App offers maximum convenience. Everything you need for atmospheric lighting with style is already included in this set.

Technical specifications

With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
Settings via	Bluetooth Mesh
With remote control	No
Version	400 mm
PU1, EAN	4007841094836
Application, place	Outdoors
Application, room	outdoors, garden, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Package content	1
Installation site	Floor
Impact resistance	IK07
IP-rating	IP65
Ambient temperature	from -20 up to 40 °C

Measured luminous flux (360°)	962 lm
Colour temperature	all colors + 1800-4000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 60000 h
Continuous light	selectable
Twilight setting	2 – 2000 lx
Main light adjustable	10 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes
Interconnection via	Bluetooth Mesh
Product category	24V-Garden LED globe light
Ausführung des Betriebsgeräts	without sensor, with Bluetooth
Anzahl der Ausgänge	2
Geeignet für Konstantspannung	Yes
Geeignet für Konstantstrom	No

<https://www.steinel.de>

Subject to technical modifications

02.2026 Page 1 from 2

24V-Garden LED globe light

Sphera C 24V Starter Set

400 mm

EAN 4007841 094836

Article number 094836



Technical specifications

Housing material	Plastic
Cover material	Plastic, structured
Output	9,07 W
Average rated life expectancy of power supply unit at 25°C	> 60000 h
Photo-cell controller	Yes
Luminous flux total product	962 lm

Ausgangsleistung	35 W
Ausgangsstrom	1,45 mA
Ausgangsspannung	24 V
Cord length	0.65 m

Accessories

EAN 4007841 088620	Wireless pushbutton TapDuo C
EAN 4007841 089290	Cable 24V
EAN 4007841 089276	Cable 24V
EAN 4007841 089283	Cable 24V
EAN 4007841 089269	Power Supply 24V
EAN 4007841 089252	Power Supply 24V
EAN 4007841 091491	Aluminium ground spike 24V
EAN 4007841 089313	Cross Connector 24V
EAN 4007841 089306	T-Connector 24V

Dimension Drawing

