

24V-Garden LED Spot

Spot Garden C 24V Starter Set

EAN 4007841 093907

Article number 093907



outdoor spot



Plug & Play - easy to install



Low-voltage system



Bluetooth Mesh



Settings via App



Spot: IP65



Power Supply,
Cable, T-Connector:
IP67



Mains Plug IP44



Light source not
exchangeable



CE

Function description

Starter set: Plug in, configure, and experience instantly. With the "Spot Garden C 24V Starter Set", you'll get a quick and easy introduction to the 24V garden lighting system. The set includes two "Spot Garden C 24V" ground spots with integrated light sensors, a 35W power supply, a 2.5 m connection cable, and a T-connector. All components can be connected effortlessly using Plug & Play and conveniently controlled via the STEINEL Connect App. Ideal for anyone looking to install stylish outdoor lighting quickly and easily – with everything you need in one set.

Technical specifications

Dimensions (L x W x H)	69 x 118 x 369 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
Settings via	Bluetooth Mesh
With remote control	No
PU1, EAN	4007841093907
Application, place	Outdoors
Application, room	outdoors, garden, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Installation site	Floor
IP-rating	IP65
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium
Cover material	PC structured
Output	7,8 W

Colour temperature	all colors + 1800-4000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 60000 h
Continuous light	selectable
Twilight setting	2 – 2000 lx
Main light adjustable	10 - 100 %
Twilight setting TEACH	Yes
Interconnection	Yes
Interconnection via	Bluetooth Mesh
R9-Farb wiedergabeindex	60
Product category	24V-Garden LED Spot
Anzahl der Ausgänge	2
Geeignet für Konstantspannung	Yes
Geeignet für Konstantstrom	No
Ausgangsleistung	35 W

<https://www.steinel.de>

Subject to technical modifications

01.2026 Page 1 from 2

Spot Garden C 24V Starter Set

EAN 4007841 093907

Article number 093907

Technical specifications

Average rated life expectancy of power supply unit at 25°C > 60000 h

Luminous flux total product 363 lm

Measured luminous flux (360°) 363 lm


Ausgangsstrom 1,45 mA

Ausgangsspannung 24 V

Accessories

EAN 4007841 089276	Cable 24V
EAN 4007841 089283	Cable 24V
EAN 4007841 089290	Cable 24V
EAN 4007841 089252	Power Supply 24V
EAN 4007841 089269	Power Supply 24V
EAN 4007841 089306	T-Connector 24V
EAN 4007841 089313	Cross Connector 24V
EAN 4007841 088620	Wireless pushbutton TapDuo C

Dimension Drawing 1

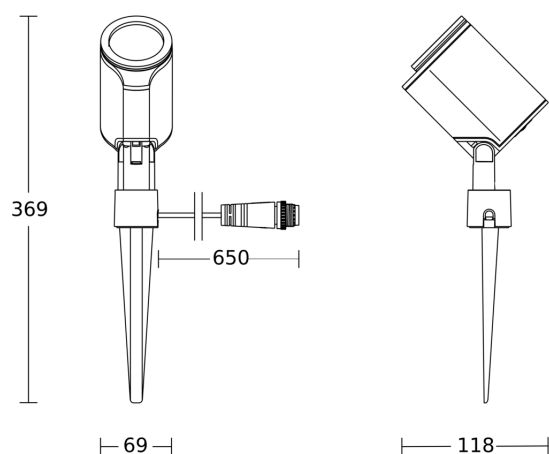

Dimension Drawing 2

