


Sensor-switched LED outdoor light

GL 60 LED



EAN 4007841 007881
Article number 007881

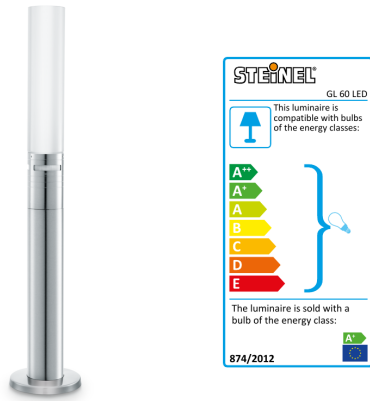

long life LED
25.000 h CRI 80



3000K
warm-white



infrared sensor
360°



max. 12 m



IP44



2 - 2000 lux



5 sec - 15 min



soft light start



manual override



energy saving

Function description

Timeless classic with efficient LEDs. Sensor-switched outdoor light STEINEL GL 60 LED, ideal for gardens, drives or pathways. 8,6 W STEINEL LED lighting system, 812 lm, 360° infrared sensor with 12 m reach, including basic light function, soft light start and optional manual override.

Technical specifications

Mains power supply	230 – 240 V / 50 Hz	Mechanical scalability	No
Sensor Technology	passive infrared	Reach, radial	Ø 12 m (113 m ²)
Output	8,6 W	Reach, tangential	Ø 24 m (452 m ²)
Interconnection	No	Photo-cell controller	Yes
Slave mode/selectable	No	Twilight setting	2 – 2000 lx
Luminous flux	812 lm	Time setting	5 s – 15 Min.
Efficiency	94 lm/W	Basic light level function	Yes
Colour temperature	3000 K	Soft light start	Yes
Colour variation LED	SDCM6	Continuous light	selectable, 4h
Colour Rendering Index CRI	80-89	Impact resistance	IK03
With lamp	Yes	IP-rating	IP44
Lamp	LED can be replaced	Protection class	II
LED life expectancy (max. °C)	25000 h	Ambient temperature	-20 – 50 °C
Base	E27	Housing material	Stainless steel
LED cooling system	Passive Thermo Control	Cover material	Glass opal
With motion detector	Yes	Manufacturer's Warranty	3 years
Detection angle	360 °	includes sheet of self-adhesive numbers	No
Angle of aperture	30 °	Settings via	Potentiometers
Sneak-by guard	Yes	With remote control	No
Capability of masking out individual segments	Yes	Cover material	shrouds
Electronic scalability	No	PU1, EAN	4007841007881

Sensor-switched LED outdoor light

GL 60 LED




EAN 4007841 007881
Article number 007881

Accessories

EAN 4007841 008321	LED linear lamp for GL 60 LED
EAN 4007841 001346	Replacement glass shade for GL 60 S
EAN 4007841 001339	Replacement electronics unit for GL 60 S

Detection Zone

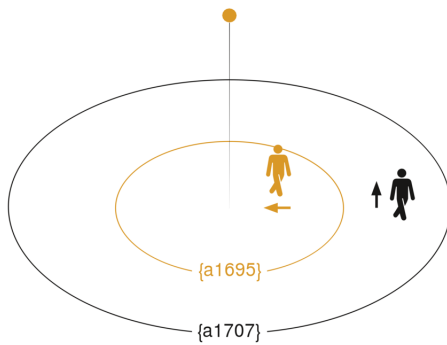

Mögliche Montagehöhe: –
Orange: radial
Schwarz: tangential

Dimension Drawing

