


Sensor-switched outdoor light

L 115 S

white

EAN 4007841 657413

Article number 657413



max.60w



infrared sensor
240°



max. 12 m



IP44



2 - 1000 lux



5 sec - 15 min



soft light start



manual override



ideal 2 m



energy saving

Function description

Bright individual. Sensor-switched outdoor light L 115 S, ideal for building fronts and building entrances, 240° angle of coverage, reach up to 12 m, selectable time and twilight threshold, basic light-level function.

Technical specifications

Dimensions (L x W x H)	257 x 215 x 330 mm
Mains power supply	230 – 240 V / 50 – 60 Hz
Mounting height max.	6,00 m
Sensor Technology	passive infrared
Output	60 W
Interconnection	No
Slave modeselectable	No
With lamp	No
Lamp	All-purpose lamp
Base	E27
With motion detector	Yes
Detection angle	240 °
Angle of aperture	120 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 5 m (52 m ²)
Reach, tangential	r = 12 m (302 m ²)

Photo-cell controller	Yes
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Soft light start	Yes
Continuous light	selectable, 4h
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 50 °C
Housing material	Plastic
Cover material	Glass transparent
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Cover material	shrouds
Version	white
PU1, EAN	4007841657413

Sensor-switched outdoor light

L 115 S

white

EAN 4007841 657413


Article number 657413



Accessories

EAN 4007841 001681 Replacement glass shade for L 115 S

Detection Zone

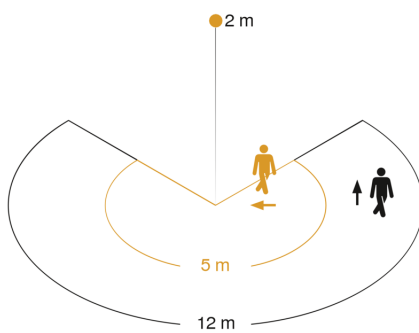

Mögliche Montagehöhe: 1,80 m – 6,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

