


Sensor-switched outdoor light

# L 190 S

white

EAN 4007841 644512

Article number 644512



<b>max.100w</b>									<b>3 JAHRE</b> HERSTELLER GARANTIE steinel.de/garantie
max. 100 W E27	infrared sensor 180°	max. 12 m	IP44	2 - 2000 lux	5 sec - 15 min	manual override	ideal 2 m	energy saving	manufacturer's warranty steinel.de/garantie

## Function description

Timelessly elegant in every detail. Classic outdoor SensorLight L 190 S, ideal for prestigious outdoor spaces, 180° angle of coverage, reach can be set up to 12 m or up to 5 m, durable, lavishly ornamented die-cast aluminium, basic light-level function and soft light start.

## Technical specifications

Dimensions (L x W x H)	147 x 217 x 335 mm	Photo-cell controller	Yes
Mains power supply	230 – 240 V / 50 Hz	Twilight setting	2 – 200 lx
Mounting height max.	4,00 m	Time setting	5 s – 15 Min.
Sensor Technology	passive infrared	Basic light level function	No
Output	100 W	Soft light start	Yes
Interconnection	No	Continuous light	selectable, 4h
Slave modeselectable	No	Impact resistance	IK03
With lamp	No	IP-rating	IP44
Lamp	All-purpose lamp	Protection class	II
Base	E27	Ambient temperature	-20 – 40 °C
With motion detector	Yes	Housing material	Aluminium
Detection angle	180 °	Cover material	Glass transparent
Angle of aperture	90 °	Manufacturer's Warranty	3 years
Sneak-by guard	Yes	Settings via	Potentiometers
Capability of masking out individual segments	Yes	With remote control	No
Electronic scalability	No	Cover material	shrouds
Mechanical scalability	No	Version	white
Reach, radial	r = 5 m (39 m <sup>2</sup> )	PU1, EAN	4007841644512
Reach, tangential	r = 12 m (226 m <sup>2</sup> )		

Sensor-switched outdoor light

# L 190 S

white

EAN 4007841 644512


Article number 644512



## Accessories

EAN 4007841 000813	Glass set for L 190 S
EAN 4007841 002190	Replacement base unit for L 170 / L 190 S

## Detection Zone

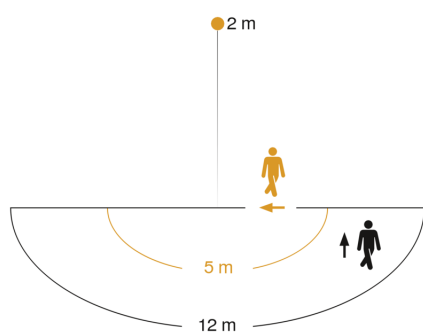

Mögliche Montagehöhe: 1,80 m – 4,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

