


Sensor-switched LED outdoor light

L 260 LED



EAN 4007841 007874
Article number 007874



LED

long life LED
25.000 h CRI 80



3000K
warm-white



infrared sensor
240°



max. 12 m



IP44



2 - 2000 lux



5 sec - 15 min



soft light start



manual override



ideal 2 m

Function description

The classic sensor. Now even more economical. STEINEL sensor-switched outdoor light L 260 LED, ideal for building entrances, fronts of buildings, patio and side areas. 8,6 W STEINEL LED lamp, 700 lm, 240° infrared sensor, 12 m reach, high-quality stainless steel with opal glass shade.

Technical specifications

Dimensions (L x W x H)	177 x 102 x 426 mm
Mains power supply	230 – 240 V / 50 Hz
Mounting height max.	6,00 m
Sensor Technology	passive infrared
Output	8,6 W
Interconnection	No
Slave mode/selectable	No
Luminous flux	700 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, LED lamp
Lamp	LED can be replaced
LED life expectancy (max. °C)	25000 h
Base	E27
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	240 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes

Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 6 m (75 m ²)
Reach, tangential	r = 12 m (302 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	No
Soft light start	Yes
Continuous light	selectable, 4h
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 50 °C
Housing material	Stainless steel
Cover material	Glass opal
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Cover material	shrouds
PU1, EAN	4007841007874

<https://www.steinel.de>

Subject to technical modifications

02.2021 Page 1 from 2

Sensor-switched LED outdoor light

L 260 LED




EAN 4007841 007874
Article number 007874

Accessories

EAN 4007841 008314	LED linear lamp for L 260 LED
EAN 4007841 001353	Replacement glass shade for L 260 S

Detection Zone

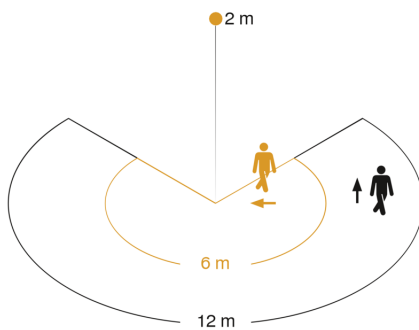

Mögliche Montagehöhe: 1,80 m – 6,00 m
Orange: radial
Schwarz: tangential

Dimension Drawing

