

L 400 S

white

EAN 4007841 611118

Article number 611118



Max. 60 W

infrared sensor
240°

max. 12 m



IP44



2 - 2000 lux



5 sec - 15 min



energy saving

5 years

manufacturer's
warranty steinel-
professional.de/
garantie

CE



ENEC 10

Function description

Simply classic, simply classy. Outdoor SensorLight L 400 S, ideal for building walls and entrance areas, for E 27 lamps, 240° angle of coverage, max. reach 12 m, basic light-level function, hand-blown crystal glass shade with decorative bubble effect.

Technical specifications

Dimensions (L x W x H)	250 x 215 x 336 mm
With lamp	No
Manufacturer's Warranty	5 years
Settings via	Potentiometers
With remote control	No
Version	white
PU1, EAN	4007841611118
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	from -20 up to 40 °C
Housing material	Plastic
Cover material	Glass transparent

Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (19 m ²)
Reach, tangential	r = 12 m (302 m ²)
Photo-cell controller	Yes
Cover material	shrouds
Lamp	All-purpose lamp
Base	E27
Soft light start	Yes
Continuous light	selectable, 4h
Twilight setting	2 - 2000 lx
Time setting	5 s - 15 Min.
Basic light level function	Yes
Interconnection	No
Basic light level function in per cent	0 - 50 %

L 400 S

white
EAN 4007841 611118
Article number 611118



Technical specifications

Mains power supply	220 – 240 V / 50 – 60 Hz
Output	60 W
Power consumption	0,8 W
Mounting height max.	6,00 m
Slave modeselectable	No
Sneak-by guard	Yes

Basic light level function percentage, from	0 %
Basic light level function percentage, up to	50 %
Optimum mounting height	2 m
Detection angle	240 °
Product category	Sensor-switched outdoor light

Accessories

EAN 4007841 630416

Corner wall mount 03

L 400 S


white

EAN 4007841 611118

Article number 611118



Detection Zone

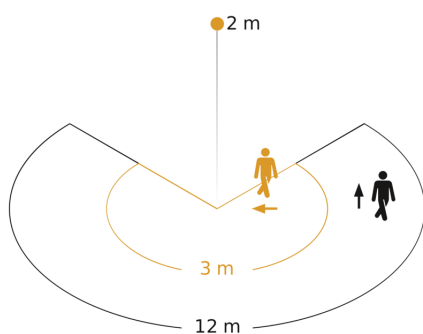


Possible mounting height: 1,80 m - 6,00 m


Orange: radial

Black: tangential

Dimension Drawing

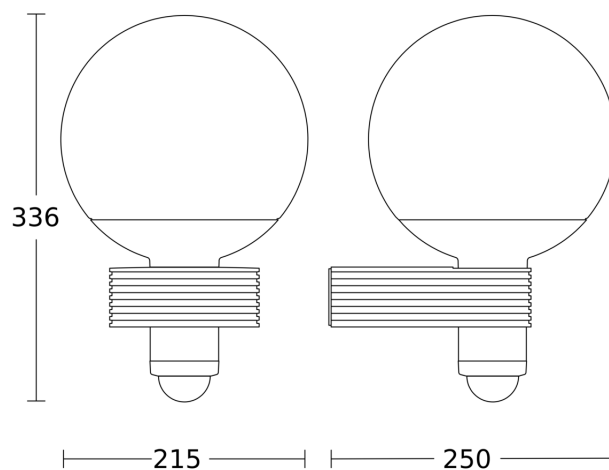

Light Distribution Curve



Output
With lamp
Lamp

60 W
No
All-purpose lamp

Slave/wireless master interconnection circuit diagram

