Solar light

XSolar SOL-O

Anthracite
EAN 4007841 052966
Article number 052966

365 TAGE LICHT
Light 365 days of the year

3000 K
3000K warm-white

Twilight switch

IP44

2 lux

soft light start

3 years
manufacture's warranty steinel.de/garantie

CE

No cable required

TÜV Nord GS

Function description

The XSolar SOL-O solar light keeps your house number clearly illuminated. And it does so without any mains connection. The light uses solar energy and requires no mains electricity during operation. Thanks to the twilight switch, the light switches on automatically when darkness falls. The XSolar SOL-O features patented intelligent microprocessor control and a high-performance lithium iron phosphate battery that supports reliable lighting throughout the year. With night-light function and evening light (4 h).

Technical specifications

Dimensions (L x W x H)	91 x 242 x 38 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Version	Anthracite
PU1, EAN	4007841052966
Application, place	Outdoors
Application, room	outdoors, front door, courtyard & driveway
Colour	Anthracite
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	III
Ambient temperature	from -20 up to 40 °C
Housing material	Aluminium

Photo-cell controller	Yes
Luminous flux total product	7 lm
Measured luminos flux (360°)	7 lm
Colour temperature	3000 K
Colour variation LED	SDCM5
Colour Rendering Index	80-89
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	Passive Thermo Control
Soft light start	No
Functions	Light sensor
Twilight setting	2 lx
Basic light level function	Yes
Basic light level function time	all night
Output	0,07 W

Solar light

XSolar SOL-O

Anthracite
EAN 4007841 052966
Article number 052966

Technical specifications

Cover material	Plastic, structured
Power supply, detail	Solar supply, no mains power required, Lithium-iron-phosphate rechargeable battery 2000 mAh
Mounting height max.	2,50 m

Battery charge	ab 0°
Akku-Funktion	ab - 20
Product category	Solar light
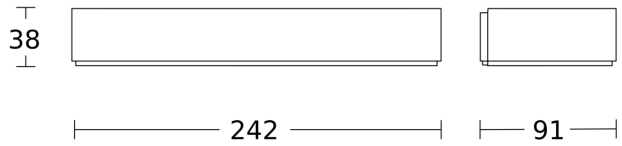
Dimension Drawing