

IS 3180

DALI-2 APC - concealed, sq.
EAN 4007841 055738
Article number 055738



Infrarot-Sensor
180°



Max. 20 m



IP20



2 - 1000 Lux



5 Sek - 15 Min



Manuelle
Übersteuerung 4
Std



Ideal 2 m

Teach

Teach mode



Energie sparen

5 years

Herstellergarantie
steinel-
professional.de/
garantie

Function description

For large areas. Infrared motion detector IS 3180 for indoors and out, ideal for watching over large areas, ideal installation height 2 m, 180° angle of coverage, reach 20 m max. or 8 m max. (tangential).

Technical specifications

Dimensions (L x W x H)	78 x 94 x 94 mm
Manufacturer's Warranty	5 years
Settings via	Remote control, Potentiometers, Smart Remote
With remote control	No
Version	DALI-2 APC - concealed, sq.
PU1, EAN	4007841055738
Type	Motion detectors
Application, place	Outdoors, Indoors
Application, room	corridor / aisle, function room / ancillary room, stairwell, multi-storey / underground car park, outdoors, all round the building, courtyard & driveway, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	wall, corner
Installation	Concealed wiring, Wall, corner

Optimum mounting height	2 m
Detection angle	180 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (14 m²) / r = 4 m (25 m²)
Reach, tangential	r = 6 m (57 m²) / r = 20 m (628 m²)
Switching zones	448 switching zones
Functions	Normal / test mode, Manual ON / ON-OFF, Constant-lighting control ON-OFF
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	1-30 min, all night

IS 3180

DALI-2 APC - concealed, sq.
EAN 4007841 055738
Article number 055738



Technical specifications

IP-rating	IP20
Ambient temperature	-20 – 50 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Steuerausgang, Dali	Broadcast 1x30 electronic ballasts
Technology, sensors	passive infrared, Light sensor
Mounting height	1,80 – 2,50 m
Mounting height max.	2,50 m

Main light adjustable	50 - 100 %
Twilight setting TEACH	Yes
Constant-lighting control	Yes
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	Cable

Accessories

EAN 4007841 056728


Black cover for IR-sensors

IS 3180

DALI-2 APC - concealed, sq.
EAN 4007841 055738
Article number 055738




Detection Zone

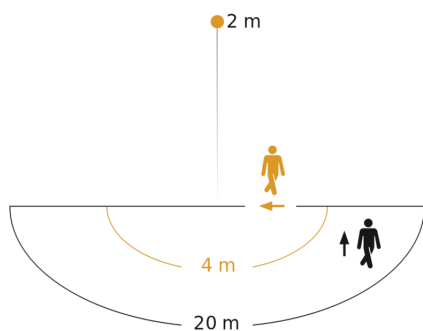


Possible mounting height: 1,80 m - 2,50 m
Orange: radial
Black: tangential

Dimension Drawing

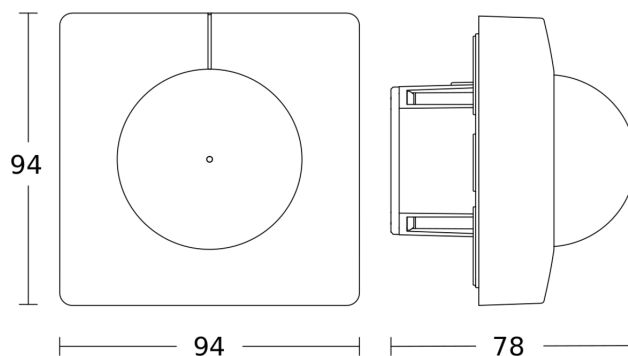

Master circuit diagram

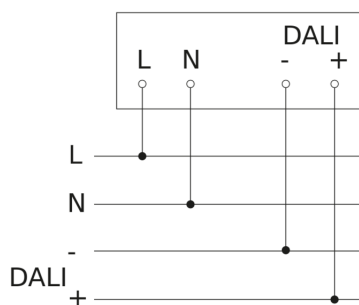

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

