

IS 3360 MX Highbay

DALI-2 APC - surface, sq.
EAN 4007841 010577
Article number 010577



infrared sensor
360°



18 m



IP54



2 - 1000 lux



5 sec - 15 min



manual override



ideal 4 - 14 m

Teach

Teach mode



energy saving

5 years

manufacturer's
warranty steinel-
professional.de/
garantie

Function description

A head for heights. Powerful reach. Reliable. IS 3360 MX Highbay motion detector – ideal for high ceilings in industrial buildings or commercial properties. For mounting heights of up to 14 m. High-precision 360° infrared sensor. Maximum reach: 18 m. For watching over up to 1000 sq.m. Available as square surface-mounted and concealed version.

Technical specifications

Dimensions (L x W x H)	65 x 95 x 95 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Remote control, Potentiometers, Smart Remote
With remote control	No
Version	DALI-2 APC - surface, sq.
PU1, EAN	4007841010577
Type	Motion detectors
Application, place	Indoors
Application, room	high-bay warehouse, sports hall, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Surface wiring, Ceiling

Optimum mounting height	12 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	Ø 14 m (154 m²)
Reach, tangential	Ø 36 m (1018 m²)
Switching zones	1416 switching zones
Cover material	shrouds
Functions	Normal / test mode, Manual ON / ON-OFF, Constant-lighting control ON-OFF
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes

IS 3360 MX Highbay

DALI-2 APC - surface, sq.
EAN 4007841 010577
Article number 010577



Technical specifications

IP-rating	IP54	Basic light level function time	1-30 min, all night
Ambient temperature	from -20 up to 50 °C	Main light adjustable	50 - 100 %
Material	Plastic	Twilight setting TEACH	Yes
Mains power supply	220 – 240 V / 50 – 60 Hz	Constant-lighting control	Yes
Steuer Ausgang, Dali	Broadcast 1x30 electronic ballasts	Interconnection	Yes
Technology, sensors	passive infrared, Light sensor	Type of interconnection	Master/slave
Mounting height	4,00 – 14,00 m	Interconnection via	Cable
Mounting height max.	14,00 m	Product category	Motion detector

Accessories


EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 559410	Service remote control RC8
EAN 4007841 592806	User remote control RC5
EAN 4007841 056711	Black cover for IR-sensors

IS 3360 MX Highbay

DALI-2 APC - surface, sq.
EAN 4007841 010577
Article number 010577




Detection Zone

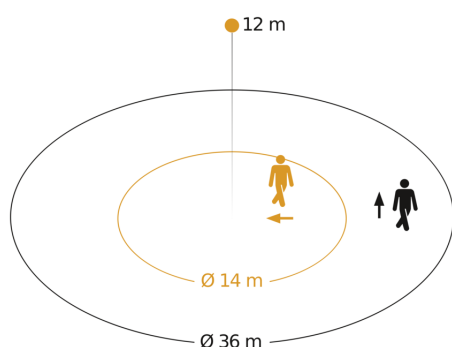


Possible mounting height: 4,00 m – 14,00 m
Orange: radial
Black: tangential

Dimension Drawing

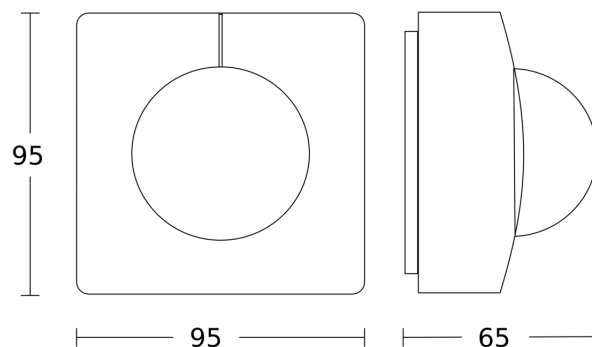

Master circuit diagram

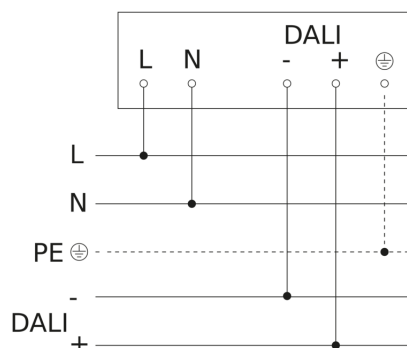

Circuit diagram for interconnecting DALI-2 APC with DALI-2 IPD

