


IS 3360 MX Highbay

DALI-2 Input Device - surface, sq.
 EAN 4007841 057374
 Article number 057374

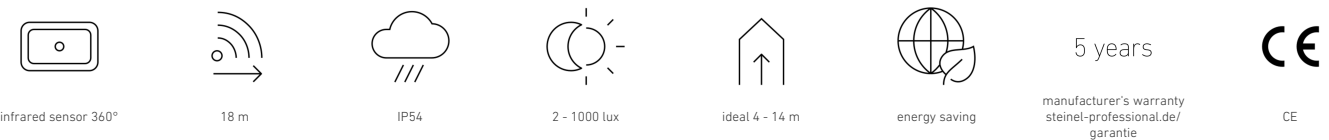

Function description

A head for heights. Powerful reach. Reliable. IS 3360 MX Highbay motion detector – ideal for high ceilings in industrial buildings or commercial properties. For mounting heights of up to 14 m. High-precision 360° infrared sensor. Maximum reach: 18 m. For watching over up to 1000 sq.m. Available as square surface-mounted and concealed version. DALI-2 Input Device enables sensors to communicate collected sensor data to higher-level lighting management systems (e.g. LiveLink).

Technical specifications

Dimensions (L x W x H)	65 x 95 x 95 mm	Mounting height	4,00 – 14,00 m
With motion detector	Yes	Mounting height max.	14,00 m
Manufacturer's Warranty	5 years	Optimum mounting height	12 m
Settings via	Bus	Detection angle	360 °
With remote control	No	Angle of aperture	180 °
Version	DALI-2 Input Device - surface, sq.	Sneak-by guard	Yes
PU1, EAN	4007841057374	Capability of masking out individual segments	Yes
Type	Motion detectors	Electronic scalability	No
Application, place	Indoors, Outdoors	Mechanical scalability	No
Application, room	high-bay warehouse, sports hall, Indoors	Reach, radial	Ø 14 m (154 m ²)
Colour	white	Reach, tangential	Ø 36 m (1018 m ²)
Colour, RAL	9003	Switching zones	1416 switching zones
Includes corner wall mount	No	Cover material	shrouds
Installation site	ceiling	Twilight setting	2 – 1000 lx
Installation	Surface wiring, Ceiling	Basic light level function	No
IP-rating	IP54	Main light adjustable	No

IS 3360 MX Highbay

DALI-2 Input Device - surface, sq.
EAN 4007841 057374
Article number 057374



Technical specifications

Ambient temperature	from -20 up to 50 °C
Material	Plastic
Mains power supply	12 – 22,5 V
Switching output 1, floating	No
Power supply, detail	DALI bus
Number of Dali users	3
Steuerausgang, Dali	Addressable/slave
With bus coupling	Yes
Technology, sensors	passive infrared, Light sensor

Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	DALI bus
Max. Current consumption according to IEC 62386-101	24 mA
Typical current consumption at 16V input voltage	5 mA
Max. Current consumption at 10V input voltage in regular operation	7 mA
Product category	Motion detector


Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 056711	Black cover for IR-sensors

IS 3360 MX Highbay


DALI-2 Input Device - surface, sq.
EAN 4007841 057374
Article number 057374

Detection Zone

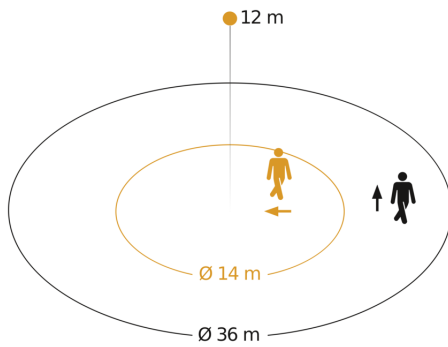

Possible mounting height: 4,00 m - 14,00 m
Orange: radial
Black: tangential

Dimension Drawing

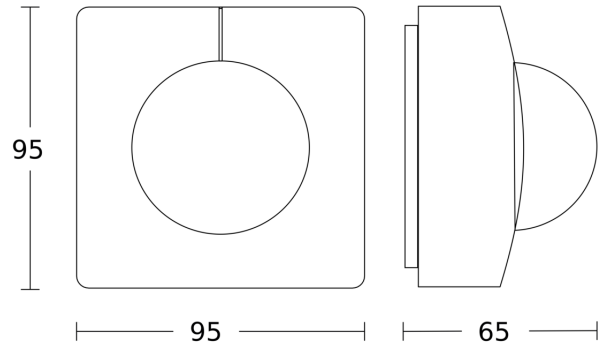

Circuit diagram

