

IS 3360

DALI-2 Input Device - concealed, rd.
EAN 4007841 057268
Article number 057268



infrared sensor 360°



max. 20 m



IP20



2 - 1000 lux



ideal 2,5 - 4 m



energy saving

5 years

manufacturer's warranty
steinel-professional.de/
garantie



CE

Function description

Higher, further, faster. Infrared presence detector IS 3360 for indoors and out, ideal for watching over high spaces and large areas, such as multi-storey and underground car parks, installation height up to 4 m, 360° angle of coverage, reach 20 m max. (tangential). Available either in round or square surface-mounted and concealed version. DALI-2 Input Device enables sensors to communicate collected sensor data to higher-level lighting management systems (e.g. LiveLink).

Technical specifications

Dimensions (L x W x H)	65 x 94 x 94 mm
Dimensions (Ø x H)	124 x 65 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Bus
With remote control	No
Version	DALI-2 Input Device - concealed, rd.
PU1, EAN	4007841057268
Type	Motion and Presence Detector
Application, place	Indoors
Application, room	production facilities, recreation room, changing room, function room / ancillary room, sports hall, reception / lobby, stairwell, WC / washroom, multi-storey / underground car park, warehouse, Indoors
Colour	white

Mounting height	2,5 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2,8 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m²)
Reach, tangential	Ø 40 m (1257 m²)
Reach, presence	Ø 3 m (7 m²)
Switching zones	1416 switching zones
Twilight setting	2 – 1000 lx
Basic light level function	No
Main light adjustable	No

IS 3360

DALI-2 Input Device - concealed, rd.
EAN 4007841 057268
Article number 057268



Technical specifications

Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	from -20 up to 50 °C
Material	Plastic
Mains power supply	12 – 22,5 V / 50 – 60 Hz
Switching output 1, floating	No
Power supply, detail	DALI bus
Number of Dali users	3
Steuerausgang, Dali	Addressable/slave
With bus coupling	Yes
Technology, sensors	passive infrared, Light sensor

Twilight setting TEACH	No
Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	DALI bus
Max. Current consumption according to IEC 62386-101	24 mA
Typical current consumption at 16V input voltage	5 mA
Max. Current consumption at 10V input voltage in regular operation	7 mA
Product category	Presence detector


Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 056742	Black cover for IR-sensors

IS 3360


DALI-2 Input Device - concealed, rd.
EAN 4007841 057268
Article number 057268

Detection Zone

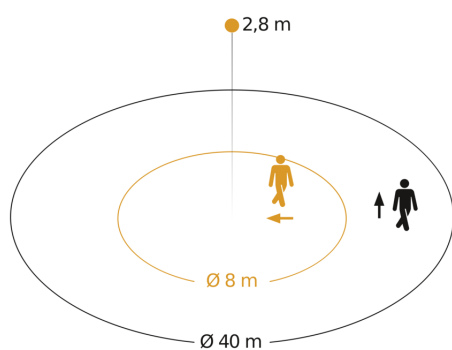

Possible mounting height: $2,50\text{ m} - 4,00\text{ m}$
Orange: radial
Black: tangential

Dimension Drawing

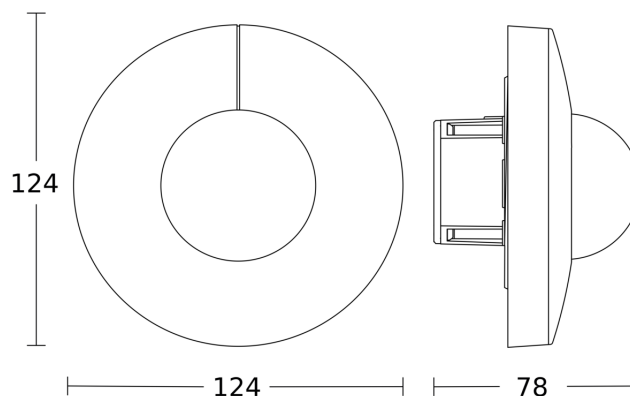

Circuit diagram

