

# IS 345

DALI-2 Input Device - surface, sq.  
 EAN 4007841 057275  
 Article number 057275



infrared sensor 360°



max. 20 x 4 m



IP54



2 - 1000 lux



ideal 2,5 - 5 m



energy saving

5 years

manufacturer's warranty  
 steinel-professional.de/  
 garantie



CE

## Function description

Huge reach. Infrared motion detector IS 345 for indoors and out, ideal for passageways, corridors and commonly used spaces, installation height 5 m, detection zone 12 x 6 m (radial) and 23 x 6 m (tangential). Available either in round or square surface-mounted and concealed version. DALI-2 Input Device enables sensors to communicate collected sensor data to higher-level lighting management systems (e.g. LiveLink).

## Technical specifications

Dimensions (L x W x H)	65 x 95 x 95 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	Bus
With remote control	No
Version	DALI-2 Input Device - surface, sq.
PU1, EAN	4007841057275
Type	Motion detectors
Application, place	Outdoors, Indoors
Application, room	corridor / aisle, multi-storey / underground car park, outdoors, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Surface wiring, Ceiling
IP-rating	IP54

Mounting height max.	5,00 m
Optimum mounting height	2,8 m
Detection angle	Aisle, 360 °
Angle of aperture	45 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	12 x 6 m (72 m <sup>2</sup> )
Reach, tangential	23 x 6 m (138 m <sup>2</sup> )
Switching zones	280 switching zones
Twilight setting	2 - 1000 lx
Basic light level function	No
Basic light level function time	1-30 min, all night
Main light adjustable	No
Twilight setting TEACH	No

# IS 345

DALI-2 Input Device - surface, sq.  
EAN 4007841 057275  
Article number 057275



## Technical specifications

Ambient temperature	von -20 bis zu 50 °C
Material	Plastic
Mains power supply	12 – 22,5 V / 50 – 60 Hz
Power supply, detail	DALI bus
Number of Dali users	3
Control output, Dali	Addressable/slave
Technology, sensors	passive infrared, Light sensor
Mounting height	2,5 – 5 m

Constant-lighting control	No
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	DALI bus
Max. Current consumption according to IEC 62386-101	24 mA
Typical current consumption at 16V input voltage	5 mA
Max. Current consumption at 10V input voltage in regular operation	7 mA


## Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 056711	Black cover for IR-sensors

# IS 345


DALI-2 Input Device - surface, sq.  
EAN 4007841 057275  
Article number 057275

## Detection Zone



Possible mounting height: 2,50 m - 5,00 m  
Orange: radial  
Black: tangential

## Dimension Drawing

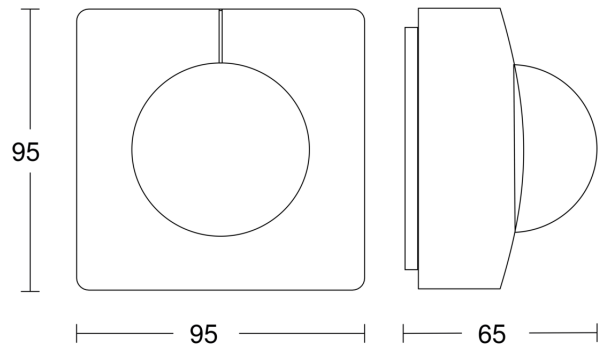

## Circuit diagram

