



RS PRO Connect R30 Q SL

warm white

EAN 4007841 057213

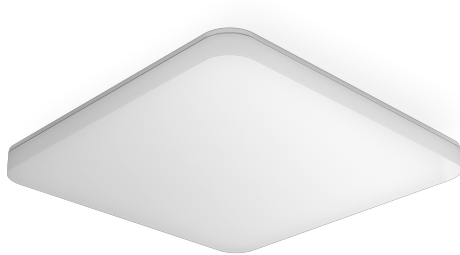

LED

36 years (Ø 4,5h / day)



3000K warm-white



soft light start



shock proof IK07



connectable via bluetooth

5 JAHRE HERSTELLER GARANTIE

steinel.de/garantie



CE



ENEC 10



VDE

Function description

Connected lighting squared. In conjunction with the master version, the slave version of the RS PRO Connect R30 Q without sensor is easily interconnected via Bluetooth to create lighting groups. Perfect light distribution – ideal for corridors, hallways and stairwells. Output: 24,5 W providing 3070 lm of light. 3000 K. Dimensions: 350 x 350 x 55 mm.

Technical specifications

Dimensions (L x W x H)	55 x 350 x 350 mm	Continuous light	selectable
Mains power supply	220 – 240 V / 50 – 60 Hz	Photo-cell controller	No
Output	24,5 W	Basic light level function, detail	LED Backlight
Luminous flux	3070 lm	Soft light start	Yes
Colour temperature	3000 K	Impact resistance	IK07
Colour variation LED	SDCM3	IP-rating	IP40
Colour Rendering Index CRI	80-89	Protection class	II
With lamp	Yes, STEINEL LED system	Ambient temperature	-20 – 40 °C
Lamp	LED cannot be replaced	Housing material	Plastic
LED life expectancy (max. °C)	50000 h	Cover material	PC, opal
LED life expectancy (25 °C)	60000 h	Manufacturer's Warranty	5 years
Drop in luminous flux in accordance with LM80	L80B50	Settings via	Bluetooth
Base	without	With remote control	No
LED cooling system	Passive Thermo Control	Version	warm white
With motion detector	No	PU1, EAN	4007841057213
Main light adjustable	50 - 100 %		

Accessories


EAN 4007841 057220 RS PRO Connect R30 Q

RS PRO Connect R30 Q SL


warm white

EAN 4007841 057213

Dimension Drawing

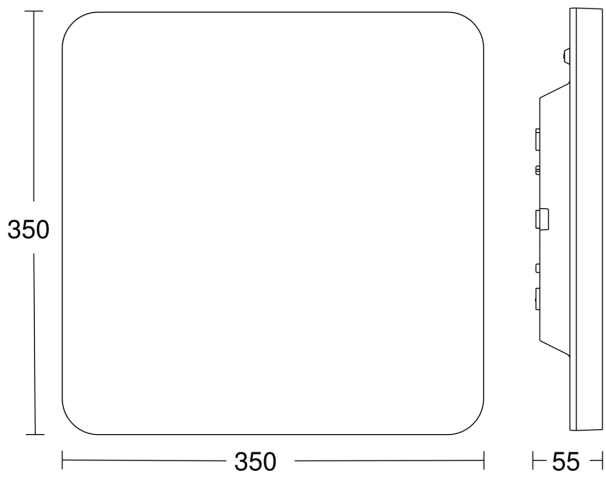

Slave/wireless master interconnection circuit diagram

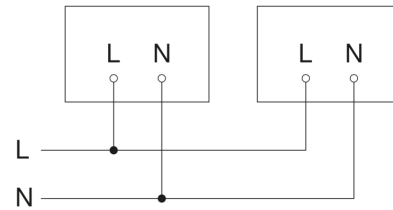

Master/master interconnection circuit diagram

