


RS 16 L

EAN 4007841 738013



| | | | | | | | | | |
|----------------|-------------------------------|-----------|------|--------------|----------------|---------------|---|----|-----|
| max.60w | | | | | | | 3 JAHRE HERSTELLER GARANTIE steinel.de/garantie | | |
| max. 60 W E27 | high frequency sensor 360° | Ø 3 - 8 m | IP44 | 2 - 2000 lux | 5 sec - 15 min | energy saving | manufacturer's warranty steinel.de/garantie | CE | EMC |

Function description

Great value. High-frequency indoor light RS 16 L, ideal for corridors, hallways, stairwells and bathrooms, 360° angle of coverage, infinitely variable electronic reach setting from 3 - 8 m, selectable time and twilight threshold, capability of connecting additional loads (e.g. extractor fan).

Technical specifications

| | | | |
|-------------------------------|---|----------------------------|----------------------------|
| Dimensions (Ø x H) | 275 x 95 mm | Reach, tangential | Ø 8 m (50 m ²) |
| Mains power supply | 230 – 240 V / 50 Hz | Continuous light | selectable |
| Sensor Technology | High frequency | Photo-cell controller | Yes |
| Transmitter power | < 1 mW | Twilight setting | 2 – 2000 lx |
| Output | 60 W | Time setting | 5 s – 15 Min. |
| Interconnection | Yes | Basic light level function | No |
| Switching output 1, resistive | 800 W | Soft light start | No |
| With lamp | No | Impact resistance | IK03 |
| Lamp | All-purpose lamp | IP-rating | IP44 |
| Base | E27 | Protection class | II |
| With motion detector | Yes | Ambient temperature | -10 – 50 °C |
| Detection | also through glass, wood and stud walls | Housing material | Plastic |
| Detection angle | 360 ° | Cover material | Glass opal |
| Angle of aperture | 160 ° | Manufacturer's Warranty | 3 years |
| Electronic scalability | Yes | Settings via | Potentiometers |
| Mechanical scalability | No | PU1, EAN | 4007841738013 |
| Reach, radial | Ø 8 m (50 m ²) | | |

Accessories

EAN 4007841 035181 Replacement base for RS 16


Sensor-switched indoor light

RS 16 L

EAN 4007841 738013



Detection Zone

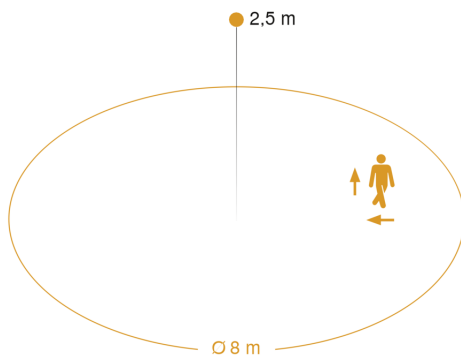

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential