


Sensor-switched indoor light

RS LED D2 Z-Wave



EAN 4007841 029852



11w

11 W 600 lm



3000K
warm-white



high frequency
sensor 360°



Ø 3 - 8 m



2 - 2000 lux



5 sec - 15 min



energy saving



3 JAHRE
HERSTELLER
GARANTIE
steinel.de/garantie



CE



TüV Nord GS

Function description

Shining light. STEINEL high-frequency sensor-switched indoor light RS LED D2 Z-Wave, can be integrated into the Smart Friends system or any other Z-Wave network, with brushed stainless-steel surround, ideal for corridors, hallways, stairwells and bathrooms. 11 W for 600 lm of light, STEINEL LED lighting system, 360° high-frequency sensor with 3-8 m reach, switches light ON without a sound, with ambient light.

Technical specifications

Dimensions (L x W x H)	66 x 300 x 300 mm	Electronic scalability	Yes
Mains power supply	220 – 240 V / 50 – 60 Hz	Mechanical scalability	No
Sensor Technology	High frequency	Reach, radial	Ø 8 m (50 m ²)
Transmitter power	< 1 mW	Reach, tangential	Ø 8 m (50 m ²)
Output	11 W	Continuous light	selectable, 4h
Interconnection	Yes	Photo-cell controller	Yes
Luminous flux	600 lm	Twilight setting	2 – 2000 lx
Colour temperature	3000 K	Time setting	5 s – 15 min
Colour variation LED	SDCM3	Basic light level function	No
Colour Rendering Index CRI	80-89	Soft light start	No
With lamp	Yes, STEINEL LED system	Impact resistance	IK03
Lamp	LED cannot be replaced	IP-rating	IP20
LED life expectancy (max. °C)	50000 h	Protection class	II
Drop in luminous flux in accordance with LM80	L70B10	Ambient temperature	-10 – 40 °C
Base	without	Transmitter range	Up to 100 m in the open, 30 m indoors
LED cooling system	Passive Thermo Control	Housing material	Plastic
With motion detector	Yes	Cover material	Plastic, opal
Detection	also through glass, wood and stud walls	Manufacturer's Warranty	3 years
Detection angle	360 °	Settings via	Potentiometers, Z-Wave
Angle of aperture	160 °	PU1, EAN	4007841029852

<https://www.steinell.de>

Subject to technical modifications

10.2020 Page 1 from 2

Sensor-switched indoor light

RS LED D2 Z-Wave




EAN 4007841 029852

Accessories

EAN 4007841 029876

Smartfriends Box

Detection Zone

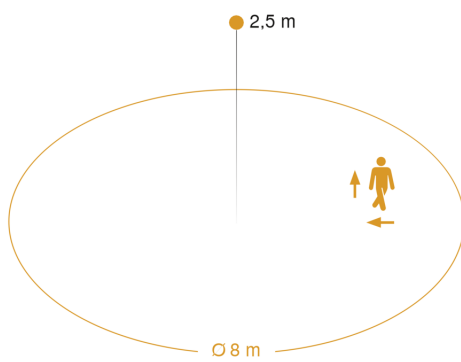

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

