


Sensor-switched indoor light

RS LED M2

V2 Chrome

EAN 4007841 052508



LED

30 years (Ø 4,5h / day)



3000K warm-white



high frequency sensor 360°



Ø 3 - 8 m



2 - 2000 lux



5 sec - 15 min



manual override



indoor



energy saving

3 JAHRE
HERSTELLER
GARANTIE

steinel.de/garantie
manufacturer's warranty
steinel.de/garantie

Function description

Make elegant statements. Translucent RS LED M2 indoor LED lights for ceiling and wall. With an impressive 873 lm for classy ambient light at a power consumption of just 9,5 W. Integrated high-frequency sensor with an angle of coverage of 360° and reach of up to Ø 6 m. Night-light function and 4-hour manual override (3000 K). Available in either chrome or silver.

Technical specifications

Dimensions (L x W x H)	67 x 220 x 220 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	High frequency
Output	9,5 W
Interconnection	Yes
Luminous flux	873 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	65000 h
Drop in luminous flux in accordance with LM80	L70B10
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Electronic scalability	Yes

Mechanical scalability	No
Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 8 m (50 m ²)
Continuous light	selectable, 4h
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Soft light start	No
Impact resistance	IK03
IP-rating	IP20
Protection class	II
Ambient temperature	-10 – 30 °C
Housing material	Plastic
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
Settings via	Potentiometers
Version	Chrome
PU1, EAN	4007841052508

<https://www.steinell.de>

Subject to technical modifications

10.2020

Page 1 from 2

Sensor-switched indoor light


RS LED M2

V2 Chrome

EAN 4007841 052508



Detection Zone

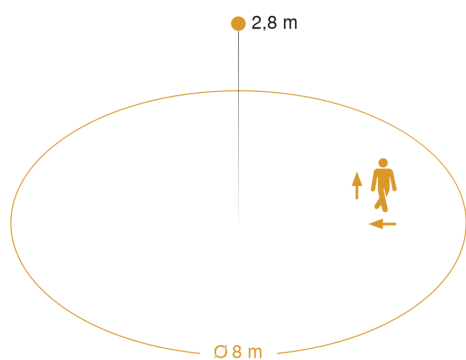

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

