


XLED PRO Wide XL SL

white
EAN 4007841 010201



LED

48w



4000K neutral white



IP54



360° horizontal,
90° vertical



soft light start



3% basic brightness



manual override



energy saving

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's warranty
steinel-professional.de/garantie

Function description

Day-bright light output. The XLED PRO Wide XL in the slave version gives 4400 lm for maximum lighting power at just 48 W. The intricately calculated lens optics guarantee maximum light efficiency. And homogeneous illumination of expansive rectangular areas, e.g. in front of large buildings. Fully tilting and turning LED panel. With high-quality aluminium heat sink.

Technical specifications

Dimensions (L x W x H)	126 x 265 x 165 mm	Photo-cell controller	No
Mains power supply	220 – 240 V / 50 – 60 Hz	Basic light level function time	10 min, 30 min, all night
Mounting height max.	6,00 m	Soft light start	No
Output	48 W	Continuous light	selectable, 4h
Luminous flux	4400 lm	Impact resistance	IK03
Colour temperature	4000 K	IP-rating	IP54
Colour variation LED	SDCM3	Protection class	I
Colour Rendering Index CRI	80-89	Ambient temperature	-20 – 40 °C
With lamp	Yes, STEINEL LED system	Housing material	Aluminium
Lamp	LED cannot be replaced	Cover material	Plastic, transparent
LED life expectancy (max. °C)	50000 h	Manufacturer's Warranty	5 years
Drop in luminous flux in accordance with LM80	L70B10	PU1, net weight	1,827 kg
LED cooling system	Passive Thermo Control	Version	white
With motion detector	No	PU1, EAN	4007841010201

Accessories

EAN 4007841 007638 Remote control RC9

LED Floodlight - Professional Line


XLED PRO Wide XL SL

white

EAN 4007841 010201



Dimension Drawing

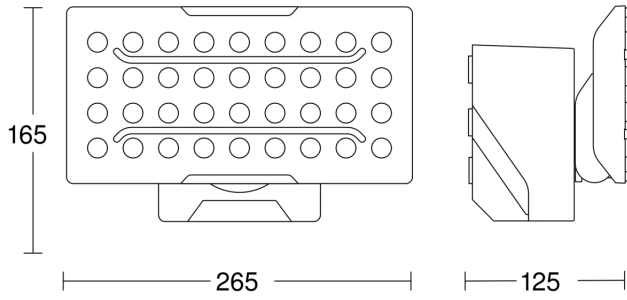

Slave circuit diagram

