

HF 360

LiveLink

EAN 4007841 033972



high frequency sensor 360°



max. Ø 12 m



IP20



ideal 2.5 - 3.5 m



indoor sensor



iQ-mode

TEACH

Teach mode



energy saving



5 JAHRE
HERSTELLER
GARANTIE
Hersteller-Präsenzdetektor

manufacturer's warranty
steinel-professional.de/garantie



CE

Function description

Doesn't miss a thing. HF-presence detector Presence Control PRO HF 360 LiveLink for indoors, ideal for WCs with toilet cubicles, changing rooms, stairwells, multi-storey car parks, kitchens, installation height up to 3.5 m, with digital DALI interface for integration into the LiveLink system, 1 – 12 m reach, reach is electronically adjustable and can be limited in two directions, detection regardless of temperature, HF-sensor technology also detects movement through glass, wood and stud walls.

Technical specifications

Type	Presence detector
Dimensions (L x W x H)	36 x 120 x 120 mm
Power supply, detail	DALI bus
Number of Dali users	4
Sensor Technology	High frequency
Application, place	Indoors
Application, place, room	function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors
Installation site	ceiling
Installation	Concealed wiring
HF-system	5,8 GHz
Electronic scalability	Yes
Mechanical scalability	No
Mounting height	2,50 – 3,50 m
Optimum mounting height	2,8 m
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	160 °
Sneak-by guard	Yes

Capability of masking out individual segments	Yes
Reach, detail	1 or 2 detection directions can be masked out by stickers for adjustment to the room situation.
Reach, radial	Ø 12 m (113 m ²)
Reach, tangential	Ø 12 m (113 m ²)
Twilight setting TEACH	Yes
Twilight setting	10 – 1000 lx
Time setting	60 s – 60 Min.
LiveLink values	Light level, Motion detection, Presence detection
Basic light level function	No
With bus coupling	Yes
Settings via	LiveLink app
IP-rating	IP20
Material	Plastic
Colour	white
Colour, RAL	9010
Manufacturer's Warranty	5 years
Version	LiveLink
PU1, EAN	4007841033972

HF 360


LiveLink

EAN 4007841 033972

Accessories

EAN 4007841 000363	Surface-mounting adapter Control PRO AP Box (IP54)
EAN 4007841 003036	Control PRO guard cage
EAN 4007841 006600	HF-ceiling adapter
EAN 4007841 009151	Remote control Smart Remote

Detection Zone

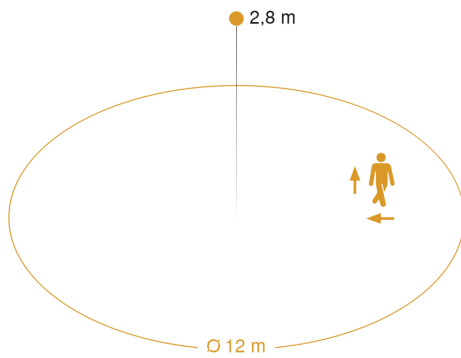

Mögliche Montagehöhe: 2,50 m – 3,50 m
Orange: radial und tangential

Dimension Drawing

