

# IR Quattro SLIM 4m

V3 KNX

EAN 4007841 058494

Article number 058494



infrared sensor  
max. 4m x 4m  
presence



max. 4 x 4 m  
presence



KNX 4 channel



10 - 1000 lux with  
RC 6



1 min - 15 min with  
RC 6



ideal 2,5 - 4 m



indoor sensor

Teach

Teach mode with RC  
6

iQ

iQ-mode

5 years

manufacturer's  
warranty steinel-  
professional.de/  
garantie

## Function description

Genuine 16 m<sup>2</sup> of presence detection concentrated on 4 mm. Control PRO IR Quattro SLIM KNX presence detector for indoors, ideal for small offices, store, service and utility rooms, washrooms and WCs, for mounting at a height of up to 4 m, with digital BUS interface for controlling 4 lighting channels and HVAC.

## Technical specifications

Dimensions (L x W x H)	55 x 77 x 77 mm	Mounting height max.	4,00 m
With motion detector	Yes	Optimum mounting height	2,8 m
Manufacturer's Warranty	5 years	Detection angle	360 °
Settings via	ETS software, Remote control, Bus, Smart Remote	Angle of aperture	71 °
With remote control	No	Sneak-by guard	Yes
Version	KNX	Capability of masking out individual segments	No
PU1, EAN	4007841058494	Electronic scalability	No
Type	Presence detector	Mechanical scalability	No
Application, place	Indoors	Reach, radial	4 x 4 m (16 m <sup>2</sup> )
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors	Reach, tangential	4 x 4 m (16 m <sup>2</sup> )
Colour	white	Reach, presence	4 x 4 m (16 m <sup>2</sup> )
Colour, RAL	9010	Switching zones	260 switching zones
Includes corner wall mount	No	Twilight setting	10 – 1000 lx
Installation site	ceiling	Time setting	10 s – 1092 Min.
Installation	In-ceiling installation, Ceiling	Basic light level function	Yes
		Main light adjustable	0 - 100 %
		Twilight setting TEACH	Yes

# IR Quattro SLIM 4m

V3 KNX  
 EAN 4007841 058494  
 Article number 058494



## Technical specifications


IP-rating	IP20
Protection class	II
Ambient temperature	0 – 40 °C
Material	Plastic
Power supply, detail	KNX bus
With bus coupling	Yes
Technology, sensors	passive infrared, Photo-cell controller
Mounting height	2,50 – 4 m

Constant-lighting control	No
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	10 mA

## Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX

## Detection Zone

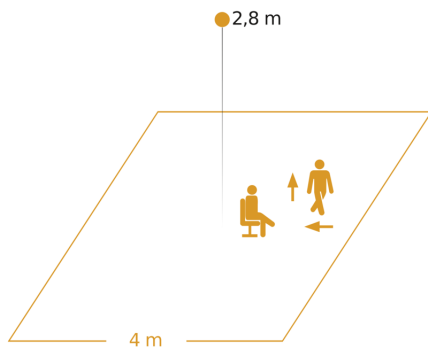

Possible mounting height: 2,50 m – 4,00 m  
 Orange: presence, tangential and radial

## Dimension Drawing

