

Presence detector - Professional Line

IR Quattro SLIM KNX

V3 KNX

EAN 4007841 058494

Article number 058494



infrared sensor
max. 4 x 4m
presence



max. 4 x 4 m
presence



KNX 4 channel



10 - 1000 lux with
RC 6



1 min - 15 min
with RC 6



ideal 2,5 - 4 m



indoor sensor

Teach

Teach mode with
RC 6

iQ

iQ-mode

5 years

manufacturer's
warranty
[steinel-professional.de/garantie](https://www.steinel.de/garantie)

Function description

Genuine 16 m² of presence detection concentrated on 4 mm. Control PRO IR Quattro SLIM KNX presence detector for indoors, ideal for small offices, store, service and utility rooms, washrooms and WCs, for mounting at a height of up to 4 m, with digital BUS interface for controlling 4 lighting channels and HVAC.

IR Quattro SLIM KNX

V3 KNX

EAN 4007841 058494

Article number 058494



Technical specifications

Type	Presence detector
Dimensions (L x W x H)	55 x 77 x 77 mm
Power supply, detail	KNX bus
Sensor Technology	passive infrared
Application, place	Indoors
Installation site	ceiling
Installation	In-ceiling installation
Mounting height	2,50 – 4 m
Reach, radial	4 x 4 m (16 m ²)
Reach, tangential	4 x 4 m (16 m ²)
Reach, presence	4 x 4 m (16 m ²)
Reach, detail	Retina lens and hexagonal Fresnel structure
Detection angle	360 °
Angle of aperture	71 °
Switching zones	260 switching zones
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No

Twilight setting TEACH	Yes
Twilight setting	10 – 1000 lx
Time setting	10 s – 1092 Min.
Constant-lighting control	No
Basic light level function	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Presence output, Day / night function, Logic gate
With bus coupling	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	No
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
IP-rating	IP20
Material	Plastic
Ambient temperature	0 – 40 °C
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors
Colour	white
Colour, RAL	9010
Manufacturer's Warranty	5 years
Version	KNX
PU1, EAN	4007841058494

Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX

Presence detector - Professional Line

IR Quattro SLIM KNX


V3 KNX

EAN 4007841 058494

Article number 058494



Detection Zone

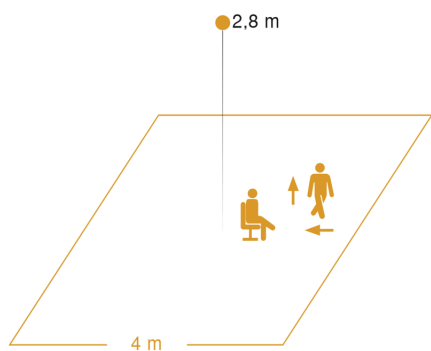

Mögliche Montagehöhe: 2,50 m – 4,00 m

Orange: Präsenz, tangential und radial

Dimension Drawing

