


## LED Floodlight

# XLED home 2 XL SL

black

EAN 4007841 032807



LED

20w



4000K neutral white



IP44



180° horizontal, 180° vertikal



networkable via cable



ideal 2 m



energy saving

5 JAHRE  
HERSTELLER  
GARANTIE  
steinel.de/garantie

manufacturer's warranty  
steinel.de/garantie



CE

30 years (Ø 4,5h / day)

20 W 1608 lm

## Function description

Highly flexible XL version. XLED home 2 XL SL - outdoor floodlight without sensor. Highly efficient LEDs for perfectly illuminating larger areas (1608 lm at 20 W consumption). Opal cover and 4000 K for optimum lighting. Flexible LED panel – tilts and turns through 180°. High thermal conductivity magnesium composite cooling system (HCMC).

## Technical specifications

Dimensions (L x W x H)	199 x 180 x 161 mm
Mains power supply	230 – 240 V / 50 – 60 Hz
Output	20 W
Luminous flux	1608 lm
Colour temperature	4000 K
Colour variation LED	SDCM3
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
Drop in luminous flux in accordance with LM80	L70B10
LED cooling system	HCMC (High Conductive Magnesium Composite)
With motion detector	No

Photo-cell controller	No
Basic light level function	No
Soft light start	No
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	HCMC
Cover material	Plastic, opal
Manufacturer's Warranty	5 years
PU1, net weight	0,524 kg
Version	black
PU1, EAN	4007841032807

LED Floodlight


# XLED home 2 XL SL

black


EAN 4007841 032807



## Dimension Drawing

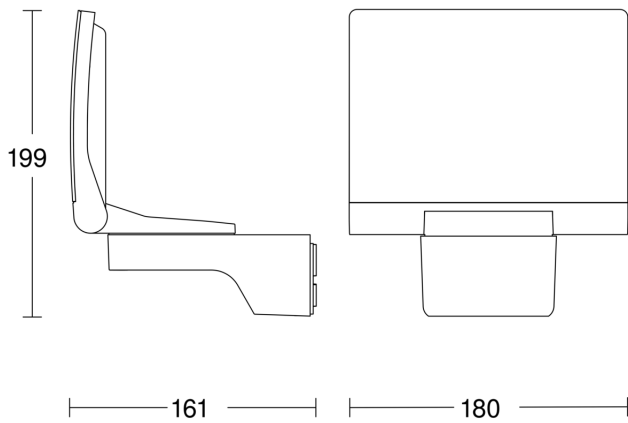

## Light Distribution Curve

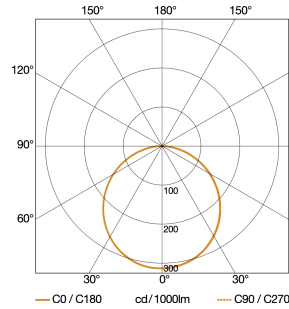

Output	20 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Luminous flux	1608 lm
Colour temperature	4000 K
Colour Rendering Index CRI	80-89
LED life expectancy (max. °C)	50000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)

## Master/slave interconnection circuit diagram

