

IR 180

KNX - white

EAN 4007841 032975



infrared sensor
180°



max. 20 m



KNX



IP20



2 - 1000 lux



indoor sensor



energy saving



5 JAHRE
HERSTELLER
GARANTIE
Herstellergarantie
manufacturer's
warranty
steinel-professional.de/garantie



CE



VDE

Function description

The new benchmark. High-precision IR 180 infrared presence sensor with a reach of 20 m. Ideal for new builds. 180° angle of coverage. Fast and easy 3-wire installation. Attractive design. Integrated button for manual override. The KNX version also provides temperature and air humidity readings.

IR 180

KNX - white

EAN 4007841 032975

Technical specifications

Type	Presence detector
Dimensions (L x W x H)	21 x 80 x 80 mm
Power supply, detail	KNX bus
Sensor Technology	passive infrared
Application, place	Indoors
Application, place, room	one-person office, corridor / aisle, function room / ancillary room, kitchenette, stairwell, WC / washroom, Indoors
Installation site	wall
Installation	Concealed wiring
Electronic scalability	Yes
Mechanical scalability	No
Mounting height	1,10 – 1,20 m
Optimum mounting height	1,2 m
Detection angle	180 °
Angle of aperture	90 °
Sneak-by guard	Yes
Reach, radial	r = 4 m (25 m ²)
Reach, tangential	r = 20 m (628 m ²)
Reach, presence	r = 4 m (25 m ²)
Twilight setting TEACH	Yes

Twilight setting	2 – 1000 lx
Time setting	60 s – 255 Min.
Basic light level function	Yes
Basic light level function in per cent	10 – 50 %
Basic light level function time	Permanently ON, 1-255 min, all night
Basic light level function percentage, from	10 %
Basic light level function percentage, up to	50 %
KNX functions	Light output 4x, Presence output, Light level, Constant-lighting control, Basic light level function, HVAC output, Integrated button, Temperature output, Humidity output
With bus coupling	No
Settings via	ETS software, Remote control, Bus, Smart Remote
IP-rating	IP20
Material	Plastic
Ambient temperature	0 – 40 °C
Colour	white
Colour, RAL	9010
Manufacturer's Warranty	5 years
Version	KNX - white
PU1, EAN	4007841032975

Accessories


EAN 4007841 034160	Adapter surround for IR/HF 180
EAN 4007841 034184	Adapter surround for IR/HF 180
EAN 4007841 034139	Adapter surround for IR/HF 180
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX

IR 180

KNX - white

EAN 4007841 032975

Detection Zone

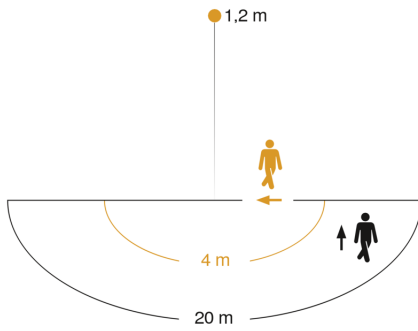

Mögliche Montagehöhe: 1,10 m – 1,20 m

Orange: radial

Schwarz: tangential

Dimension Drawing

