

True Presence

DALI-2 APC - surface
EAN 4007841 057954
Article number 057954



high frequency
sensor 360°



Movement Ø 15 m



Presence Ø 15 m



True Presence Ø 9
m



brightness



2 - 12 m



2 - 2000 lux



5 sec - 60 min



KNX



IP54

Function description

The world's first true presence detector! No unnecessary stay-ON times any more – no unnecessary electricity costs. Precision high-frequency measurement of the surrounding area provides 100 per-cent reliable detection. The True Presence detector reliably identifies whether persons are present or absent over an area of 64 m² – on the basis of the body's micro movements as well as human vital functions, such as breathing in and out, or shoulder movement. The new standard in building automation. Easy to control via app and Bluetooth.

Technical specifications

Dimensions (L x W x H)	45 x 123 x 123 mm	HF-system	7,2 GHz
With motion detector	Yes	Detection	also through glass, wood and stud walls
Manufacturer's Warranty	5 years	Detection angle	360 °
Settings via	Bluetooth	Angle of aperture	160 °
With remote control	No	Sneak-by guard	Yes
Version	DALI-2 APC - surface	Capability of masking out individual segments	No
PU1, EAN	4007841057954	Electronic scalability	Yes
Type	Presence detector	Mechanical scalability	No
Application, place	Indoors	Reach, radial	Ø 15 m (177 m²)
Application, room	classroom, lecture hall, one-person office, open-plan office, high-bay warehouse, production facilities, conference room / meeting room, hotel room, care room, duty room, recreation room, dining hall / staff restaurant, changing room, kitchenette, sports hall, reception / lobby, WC / washroom, warehouse, Indoors	Reach, tangential	Ø 15 m (177 m²)
		Reach, presence	Ø 15 m (177 m²)
		True Presence reach	Ø 9 m (64 m²)
		Transmitter power	< 1 mW
		Functions	Selecting programmed lighting scenarios, Semi-/fully automatic, Constant-lighting control ON-OFF,

True Presence

DALI-2 APC - surface
EAN 4007841 057954
Article number 057954



Technical specifications

Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Surface wiring, Ceiling
IP-rating	IP54
Ambient temperature	from -20 up to 50 °C
Material	Plastic
Mains power supply	220 – 240 V / 50 – 60 Hz
Number of Dali users	64
Steuerausgang, Dali	Broadcast 64 electronic ballasts / Addressable
Technology, sensors	High frequency, Light sensor
Mounting height	2,00 – 12,00 m
Mounting height max.	12,00 m
Optimum mounting height	2,8 m
Montagehöhe max. True Presence Erfassung	4,00 m

Lighting scenario, Manual ON / ON-OFF, Neighbouring group function, Normal / test mode, TouchDIM function


Twilight setting	2 – 2000 lx
Time setting	20 s – 60 Min.
Basic light level function	Yes
Basic light level function time	1-60 min, all night
Main light adjustable	10 - 100 %
Twilight setting TEACH	Yes
Constant-lighting control	Yes
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	Bluetooth, DALI bus
Product category	Presence detector

True Presence

DALI-2 APC - surface
EAN 4007841 057954
Article number 057954




Detection Zone

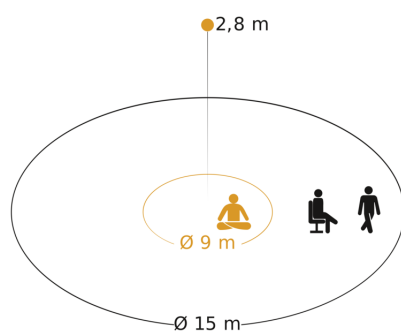


Possible mounting height: 2,00 m - 12,00 m
Orange: True Presence
Black: movement and presence

Dimension Drawing

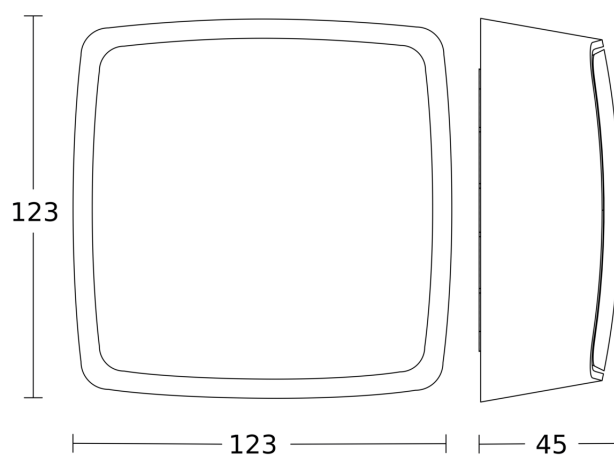

Master circuit diagram



Master/slave interconnection circuit diagram

