

Motion detector - Professional Line

HF 3360

V3 KNX - surface, sq.

EAN 4007841 058210

Article number 058210



high frequency
sensor 360°



max. Ø 8 m



KNX



IP54



2 - 1000 lux



1 - 255 min



ideal 2 - 2,8 m

Teach

Teach mode



energy saving

5 years

manufacturer's
warranty
[steinel-professional.de/garantie](https://www.steinel.de/garantie)

Function description

Perfection through and through. High-frequency motion detector HF 3360, ideal for basement corridors, stairwells, multi-storey car parks, installation height 2.8 m, 360° angle of coverage, reach 1 – 8 m (radial), detection regardless of temperature, HF-sensor technology also detects movement through glass, wood and stud walls. Available either in round or square surface-mounted and concealed version.

HF 3360

V3 KNX - surface, sq.
EAN 4007841 058210
Article number 058210



Technical specifications

Dimensions (L x W x H)	52 x 95 x 95 mm
Manufacturer's Warranty	5 years
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	Nein
Version	KNX - surface, sq.
PU1, EAN	4007841058210
Type	Motion detectors
Application, place	Indoors
Application, room	function room / ancillary room, stairwell, WC / washroom, multi-storey / underground car park, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	wall, ceiling, corner
Installation	Surface wiring, Wall, Ceiling, corner
IP-rating	IP54
Ambient temperature	-20 – 50 °C
Material	Plastic
Power supply, detail	KNX bus
With bus coupling	Yes
Sensor Technology	High frequency
Mounting height	2,00 – 4,00 m
Mounting height max.	4,00 m

Optimum mounting height	2,8 m
HF-system	5,8 GHz
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 8 m (50 m ²)
Transmitter power	
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Constant-lighting control	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	KNX bus


Accessories

EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 035174	Corner wall mount 3000
EAN 4007841 592912	User remote control RC7 KNX
EAN 4007841 056674	Black cover for HF 3360

HF 3360

V3 KNX - surface, sq.
EAN 4007841 058210
Article number 058210

Detection Zone

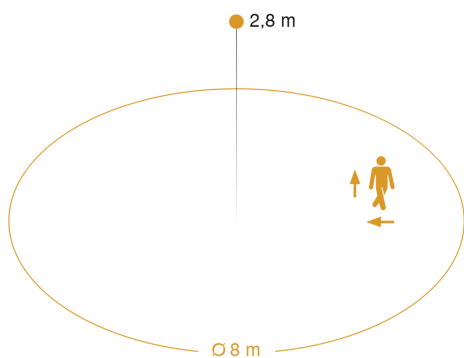

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

