

# HF 3360

V3 KNX - surface, rd.  
EAN 4007841 058234  
Article number 058234



Hochfrequenz  
Sensor 360°



Max. Ø 8 m



KNX



IP54



2 - 1000 Lux



1 - 255 Min



Ideal 2 - 2,8 m



Teach

Teach mode



Energie sparen

5 years

Herstellergarantie  
steinel-  
professional.de/  
garantie

## Function description

Perfection through and through. High-frequency motion detector HF 3360, ideal for basement corridors, stairwells, multi-storey car parks, installation height 2.8 m, 360° angle of coverage, reach 1 – 8 m (radial), detection regardless of temperature, HF-sensor technology also detects movement through glass, wood and stud walls. Available either in round or square surface-mounted and concealed version.

## Technical specifications

Dimensions (Ø x H)	126 x 52 mm
Manufacturer's Warranty	5 years
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	No
Version	KNX - surface, rd.
PU1, EAN	4007841058234
Type	Motion detectors
Application, place	Indoors
Application, room	function room / ancillary room, stairwell, WC / washroom, multi-storey / underground car park, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	wall, ceiling, corner
Installation	Surface wiring, Wall, Ceiling, corner

HF-system	5,8 GHz
Detection	also through glass, wood and stud walls
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m²)
Reach, tangential	Ø 8 m (50 m²)
Transmitter power	< 1 mW
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Main light adjustable	0 - 100 %

# HF 3360

V3 KNX - surface, rd.  
EAN 4007841 058234  
Article number 058234



### Technical specifications


IP-rating	IP54
Ambient temperature	-20 – 50 °C
Material	Plastic
Power supply, detail	KNX bus
With bus coupling	Yes
Technology, sensors	High frequency, Light sensor
Mounting height	2,00 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2,8 m

Twilight setting TEACH	Yes
Constant-lighting control	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	KNX bus
Rated current	12,5 mA

### Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX
EAN 4007841 056698	Black cover for HF 3360

### Detection Zone

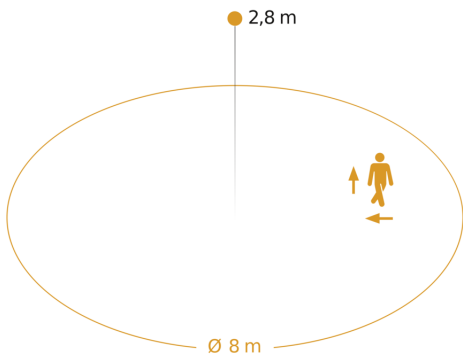

Possible mounting height: 2,00 m – 4,00 m  
Orange: radial and tangential

### Dimension Drawing

