

# IS 3360 MX Highbay

V3 KNX - surface, sq.  
EAN 4007841 058364  
Article number 058364



infrared sensor  
360°



18 m



KNX



IP54



2 - 1000 lux



1-255 min



ideal 4 - 14 m

Teach

Teach mode



energy saving

5 years

manufacturer's  
warranty steinel-  
professional.de/  
garantie

## Function description

A head for heights. Powerful reach. Reliable. IS 3360 MX Highbay motion detector – ideal for high ceilings in industrial buildings or commercial properties. For mounting heights of up to 14 m. High-precision 360° infrared sensor. Maximum reach: 18 m. For watching over up to 1000 sq.m. Available as square surface-mounted and concealed version.

## Technical specifications

Dimensions (L x W x H)	65 x 95 x 95 mm
With motion detector	Yes
Manufacturer's Warranty	5 years
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	No
Version	KNX - surface, sq.
PU1, EAN	4007841058364
Type	Motion detectors
Application, place	Indoors
Application, room	high-bay warehouse, sports hall, Indoors
Colour	white
Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Surface wiring, Ceiling

Optimum mounting height	12 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	Ø 14 m (154 m <sup>2</sup> )
Reach, tangential	Ø 36 m (1018 m <sup>2</sup> )
Switching zones	1416 switching zones
Cover material	shrouds
Twilight setting	2 – 1000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes

# IS 3360 MX Highbay

V3 KNX - surface, sq.  
 EAN 4007841 058364  
 Article number 058364

## Technical specifications


IP-rating	IP54
Ambient temperature	from -20 up to 50 °C
Material	Plastic
Power supply, detail	KNX bus
With bus coupling	Yes
Technology, sensors	passive infrared, Light sensor
Mounting height	4,00 – 14,00 m
Mounting height max.	14,00 m

Constant-lighting control	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	KNX bus
Rated current	12,5 mA
Product category	Motion detector

## Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX
EAN 4007841 056711	Black cover for IR-sensors

## Detection Zone

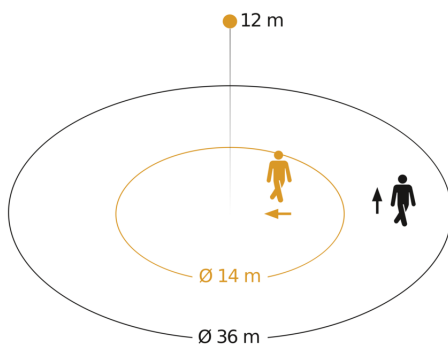

Possible mounting height: 4,00 m – 14,00 m  
 Orange: radial  
 Black: tangential

## Dimension Drawing

