

DualTech

V3 KNX - Concealed wiring
 EAN 4007841 059521
 Article number 059521



ultrasonic sensor
360°



infrared sensor
360°



max. Ø 6 m
presence



KNX 4 channel



IP20



ideal 2,5 - 3,5 m



indoor sensor



iQ-mode



Teach mode



energy saving

Function description

The best of both worlds. Combined in one detector. Ultrasonic presence detector DualTech KNX, ideal for offices, conference rooms and class rooms. 36 sq.m. presence zone, ultrasonic technology provides reliable detection behind objects regardless of temperature, additional detection capability with PIR technology, electronic adjustment for ultrasonic reach, with digital BUS interface for controlling 4 lighting channels and HVAC.

Technical specifications

Dimensions (L x W x H)	65 x 120 x 120 mm	Mounting height max.	3,50 m
With motion detector	Yes	Optimum mounting height	2,8 m
Manufacturer's Warranty	5 years	Ultrasonic technology	40 kHz
Settings via	ETS software, Remote control, Bus, Smart Remote	Detection angle	360 °
With remote control	No	Angle of aperture	180 °
Version	KNX - Concealed wiring	Sneak-by guard	Yes
PU1, EAN	4007841059521	Capability of masking out individual segments	No
Type	Presence detector	Electronic scalability	Yes
Application, place	Indoors	Mechanical scalability	No
Application, room	classroom, one-person office, open-plan office, conference room / meeting room, duty room, recreation room, Indoors	Reach, radial	Ultrasonic: Ultraschall: Ø 10 m (Ultraschall: 79 m ²)
Colour	white	Reach, tangential	Ultrasonic: Ultraschall: Ø 10 m (Ultraschall: 79 m ²)
Colour, RAL	9010	Reach, presence	Ultrasonic: Ultraschall: Ø 6 m (Ultraschall: 28 m ²)
Includes corner wall mount	No	Twilight setting	10 – 1000 lx
Installation site	ceiling	Time setting	10 s – 1092 Min.

DualTech

V3 KNX - Concealed wiring
 EAN 4007841 059521
 Article number 059521



Technical specifications

Installation	Concealed wiring, Ceiling
IP-rating	IP20
Ambient temperature	from -25 up to 55 °C
Material	Plastic
Mains power supply	30 V
Power consumption	0,7 W
Power supply, detail	KNX bus
With bus coupling	Yes
Sensor Technology 2	passive infrared
Technology, sensors	Ultrasonic, passive infrared, Light sensor
Mounting height	2,50 – 3,5 m

Basic light level function	Yes
Basic light level function time	1-255 min
Main light adjustable	0 - 100 %
Twilight setting TEACH	Yes
Constant-lighting control	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 4x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Interconnection via	KNX bus
Rated current	17,5 mA
Product category	Presence detector


Accessories

EAN 4007841 002855	Clamping-type ceiling adapter Control PRO UP Box
EAN 4007841 000363	Surface-mounted adapter Control Pro IP54
EAN 4007841 003036	Control PRO guard cage
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX

DualTech

V3 KNX - Concealed wiring
EAN 4007841 059521
Article number 059521

Detection Zone

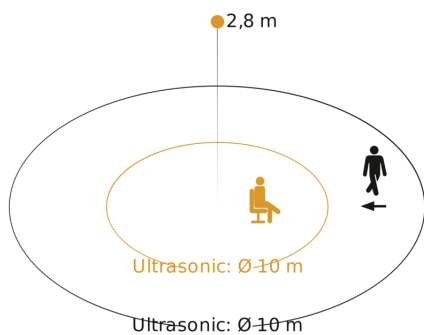

Possible mounting height: 2,50 m - 3,50 m
Orange: presence and tangential
Black: radial

Dimension Drawing

