


XLED PRO 240 SL

V2 Anthracite

EAN 4007841 068080



LED

30 years (Ø 4,5h / day)



3000K warm-white



IP44



networkable via cable



energy saving

5 JAHRE HERSTELLER GARANTIE

manufacturer's warranty
steinel-professional.de/garantie



CE



ENEC 05



KEMA KEUR

Function description

Day-bright illumination throughout: the XLED PRO 240 SL outdoor floodlight without motion detector. With fully swivelling LED flat panel and opal diffuser. 2120 lm, 3000 K, 19,5 W. Available in black, white and anthracite. Includes corner wall mount.

Technical specifications


Dimensions (L x W x H)	161 x 180 x 199 mm	Photo-cell controller	No
Mains power supply	230 – 240 V	Basic light level function	No
Output	19,5 W	Soft light start	No
Luminous flux	2120 lm	Impact resistance	IK03
Colour temperature	3000 K	IP-rating	IP44
Colour variation LED	SDCM3	Protection class	II
Colour Rendering Index CRI	80-89	Housing material	HCMC
With lamp	Yes, STEINEL LED system	Cover material	Plastic, opal
Lamp	LED cannot be replaced	Manufacturer's Warranty	5 years
LED life expectancy (max. °C)	60000 h	Includes corner wall mount	Yes
Drop in luminous flux in accordance with LM80	L70B10	PU1, net weight	0,64 kg
LED cooling system	HCMC (High Conductive Magnesium Composite)	Version	Anthracite
With motion detector	No	PU1, EAN	4007841068080

XLED PRO 240 SL

V2 Anthracite

EAN 4007841 068080

Dimension Drawing

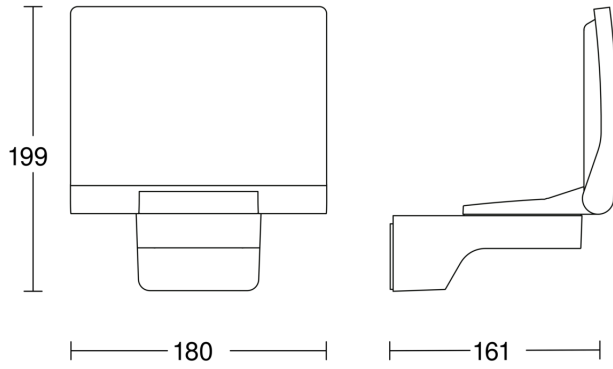

Master/slave interconnection circuit diagram

