

# IS 3360

V3 KNX - surface, rd. white  
 EAN 4007841 058180  
 Article number 058180



infrared sensor  
360°



max. 20 m



KNX



IP54



2 - 1000 lux



1-255 min



ideal 2,5 - 4 m

Teach

Teach mode



energy saving

5 years

manufacturer's  
warranty steinel.de/  
garantie

## Function description

Higher, further, faster. Infrared motion detector IS 3360 for indoors and out, ideal for watching over high spaces and large areas, such as multi-storey and underground car parks, installation height up to 4 m, 360° angle of coverage, reach 20 m max. (tangential), large terminal compartment for easy installation. Available either in round or square surface-mounted, concealed or In-ceiling installation.

## Technical specifications

Dimensions (L x W x H)	65 x 95 x 95 mm	Detection angle	360 °
Dimensions (Ø x H)	126 x 65 mm	Angle of aperture	180 °
With motion detector	Yes	Sneak-by guard	Yes
Manufacturer's Warranty	5 years	Capability of masking out individual segments	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote	Electronic scalability	No
With remote control	No	Mechanical scalability	No
Version	KNX - surface, rd. white	Reach, radial	Ø 8 m (50 m <sup>2</sup> )
PU1, EAN	4007841058180	Reach, tangential	Ø 40 m (1257 m <sup>2</sup> )
Type	Motion and Presence Detector	Reach, presence	Ø 3 m (7 m <sup>2</sup> )
Application, place	Outdoors, Indoors	Switching zones	1416 switching zones
Application, room	production facilities, recreation room, changing room, function room / ancillary room, sports hall, reception / lobby, stairwell, WC / washroom, multi-storey / underground car park, outdoors, warehouse, Indoors	Twilight setting	2 – 1000 lx
Colour	white	Time setting	5 s – 15 Min.
		Basic light level function	Yes
		Main light adjustable	0 - 100 %
		Twilight setting TEACH	Yes
		Constant-lighting control	Yes

# IS 3360

V3 KNX - surface, rd. white  
 EAN 4007841 058180  
 Article number 058180



## Technical specifications


Colour, RAL	9003
Includes corner wall mount	No
Installation site	ceiling
Installation	Surface wiring, Ceiling
IP-rating	IP54
Ambient temperature	from -20 up to 50 °C
Material	Plastic
Power supply, detail	KNX bus
With bus coupling	Yes
Technology, sensors	passive infrared, Light sensor
Mounting height	2,50 – 4,00 m
Mounting height max.	4,00 m
Optimum mounting height	2,8 m

KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate
Interconnection	Yes
Type of interconnection	Master/slave
Interconnection via	KNX bus
Rated current	12,5 mA
KNX Medium	TP 256
KNX Secure	No
Product category	Motion and Presence Detector

## Accessories

EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 592912	User remote control RC7 KNX
EAN 4007841 056735	Black cover for IR-sensors surface, rd.

## Detection Zone

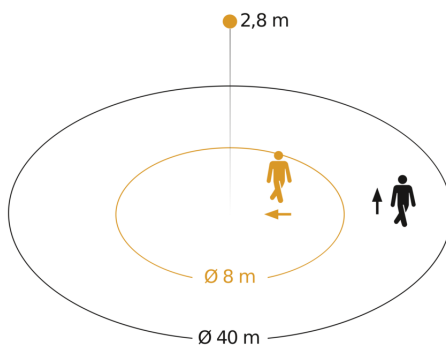

Possible mounting height: 2,50 m - 4,00 m  
 Orange: radial  
 Black: tangential

## Dimension Drawing

