


Outdoor motion detector



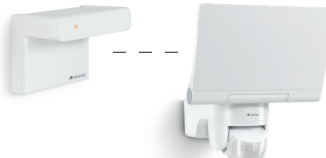
iHF 3D

No blind spots, no compromises, no inadvertent triggering. Now with Bluetooth.

Motion detector adjustable in 3 axes. Ideal for house entrances on small properties. Thanks to high-frequency technology, there are no more weather-related switching errors.










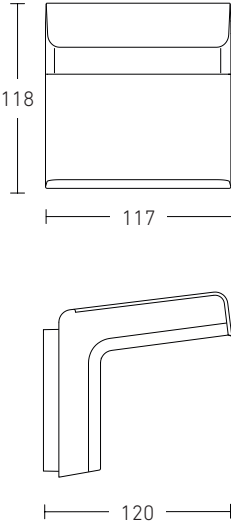


 professional line

 <p>Bluetooth 4.0 for fast and energy-saving connections</p>	 <p>Simple networking and adjustment without a cable with free STEINEL App</p>	 <p>Wireless networking of several Bluetooth-Connect products</p>
---	---	--

Outdoor motion detector

iHF 3D



 <p>STEINEL App</p>	 <p>160° intelligent high frequency sensor</p>	 <p>3 zones scalable 3 x 1-5 m (max. 7 m)</p>	 <p>2 – 2000 lx</p>	 <p>5 sec. – 60 min. via App</p>
 <p>UV-resistant plastic</p>	 <p>iHF sensor protected in housing</p>		<p>Technical specifications</p> <p>Dimensions (L x W x H) 120x117x120mm Mains power supply 120–250V / 50–60Hz Mounting height 1,80–2,00 m Sensor Technology high-frequency Output max. 2000 W (LED-ready) Detection angle 160° Sneak-by guard yes Reach 1-5 m (max. 7 m) Twilight setting TEACH yes Manual override yes IP-rating IP54 Protection class II Ambient temperature -20 – +50°C Material..... plastic</p> <p>Order details</p> <p>white..... 4007841 066222 black..... 4007841 066215 anthracite..... 4007841 066178</p> <p>Plastic free packaging</p>	
 <p>Adjustment control behind the design aperture</p>	 <p>Detection range adjustable in 3 axes</p>			