## **LS 300 LED**

# The beaming floodlight! Extremely bright, extremely robust.

The sensor-switched floodlight with aluminium floodlight head. Developed especially for needs at the front of homes, driveways and side entrances. The floodlight is available in black or white.



3120 lm

4000 K


50,000 h

With a light output of 3,120 lm, you will also be able to use your spaces as a playing field at night.

A colour temperature of 4000 K ensures a neutral white illumination of the area.

The LEDs have a life expectancy of up to 30 years or 50,000 hours.



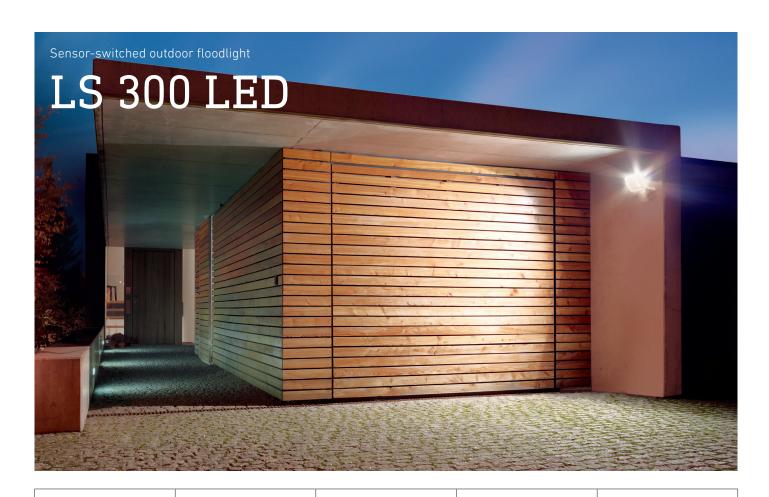







Max. radius 12 m



2 - 1000 lx



10 s – 15 min



80° horizontal 150° vertical

## The complete floodlight range for every demand



XLED ONE series




XLED home 2 series




**LS 150 LED** 



XLED curved





### Technical specifications

Dimensions (L x W x H)	186 x 213 x 241 mm
Mounting height max	4.00 m
Power / luminous flux	30.6 W / 3,120 lm
Colour temperature	4000 K/SDCM 3
LED life expectancy (max. °C)	50000 hrs
Angle of coverage	240°
Twilight setting	2 – 1000 lx
Time setting	10 s - 15 min
LED cooling system Pass	sive Thermo Control
Impact-resistant	IK03
IP rating / protection class: IP44 /	
Ambient temperature	10 - +30°C
Housing material	Aluminium
Cover material	Transparent glass

#### Ordering details

White	4007841 067588
Black	4007841 067571
LS 300 M (without sensor)	
White	4007841 069247

Black......4007841 069230

