





# True Presence®

## The first true presence detector.

It is the first detector to identify whether people are present or not. Whether in hotels, classrooms and offices, True Presence® opens up completely new capabilities for building sensor technology. Mounted at a height of up to 12 m where it provides a human-presence detection zone of no less than 177 m<sup>2</sup>, it sets new standards in human presence detection. Bluetooth takes the effort out of configuring, operation and interconnection. Now also available in black.





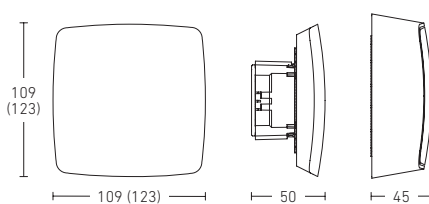









 professional line

 <p>The lights are operated, configured, and interconnected via app.</p>	 <p>Temperature measuring with the bus interfaces IP and DALI-2 IPD</p>	 <p>Humidity measuring with the bus interfaces IP and DALI-2 IPD</p>
---	--	---

Presence detectors

# True Presence®



 Settings via app	 Mounting height max. 12 m	7 Interfaces	<p><b>True Presence® technical specifications</b></p> Mounting height ..... 2.00–12.00 m True Presence® reach ..... Ø 9 m Reach, radial and tangential ..... Ø 15 m <p><b>Ordering details (concealed installation)</b></p> COM1 white..... 4007841 057923 COM1 black..... 4007841 068509 COM2 white..... 4007841 057947 DALI-2 APC white..... 4007841 057961 KNX V3.1 white..... 4007841 056339 KNX V3.1 black ..... 4007841 068516 IP ..... 4007841 066031 BT IPD (slave) ..... 4007841 064518 <p><b>Ordering details (surface installation)</b></p> COM1 white..... 4007841 057916 COM1 black..... 4007841 068493 COM2 white..... 4007841 057930 DALI-2 APC white..... 4007841 057954 IP white ..... 4007841 066024 BT IPD (slave) white ..... 4007841 064525 <p><b>Ordering details (in-ceiling installation)</b></p> COM1 white..... 4007841 079444 KNX V3.1 white..... 4007841 079451 
 True Presence® detection Ø 9 m	 Presence detection Ø 15 m	 Motion detection Ø 15 m	
 Twilight setting	<p><b>Other sensors from the Control PRO II series</b></p>   True Presence® multi-sensor      IR Quattro HD-2		
 Time setting	  HF 360-2      Hallway		