




Hallway

The specialist for long hallways and corridors.

Designed to match the Control PRO II family, the Hallway presence detector leaves a visibly lasting impression in modern buildings. Providing a detection zone of 25 x 3 m, it guarantees a fast switching response. Ideal for use in long hallways and corridors. Bluetooth takes the effort out of setting them up, putting them into operation and interconnecting them.








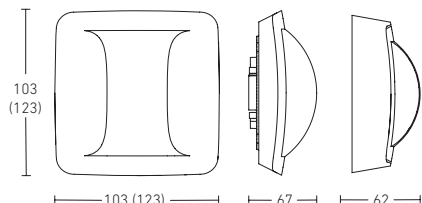




 professional line

 <p>Bluetooth for fast and energy-saving connections</p>	 <p>Temperature measuring with the bus interfaces IP and DALI-2 IPD</p>	 <p>Humidity measuring with the bus interfaces IP and DALI-2 IPD</p>
---	--	---

High-frequency hallway & corridor presence detector

Hallway



 <p>360° high-frequency hallway & corridor sensor</p>	 <p>Detection zone 25x3 m radial</p>	 <p>Mounting height 4 m max.</p>	 <p>Settings via app</p>	<p>7</p> <p>Interfaces</p>
 <p>UV protected material</p>			<p>Hallway technical specifications</p> <p>Mounting height:2.00 – 4.00 m</p> <p>Reach, radial & tangential..... 25 x 3 m</p> <p>Ordering details (concealed installation)</p> <p>COM1 4007841 057985</p> <p>COM2 4007841 058005</p> <p>DALI-2 APC 4007841 058029</p> <p>DALI-2 IPD..... 4007841 064532</p> <p>KNX V3.1 4007841 058036</p> <p>IP 4007841 066161</p> <p>BT IPD (slave) 4007841 064556</p> <p>Ordering details (surface installation)</p> <p>COM1 4007841 057978</p> <p>COM2 4007841 057992</p> <p>DALI-2 APC 4007841 058012</p> <p>DALI-2 IPD..... 4007841 064549</p> <p>KNX V3.1 4007841 064488</p> <p>IP 4007841 066154</p> <p>BT IPD (slave) 4007841 064563</p>	
<p>Further presence detectors of the latest generation</p>				
 <p>True Presence®</p>	 <p>True Presence® Multisensor</p>			
 <p>HF 360-2</p>	 <p>IR Quattro HD-2</p>			