steinel

More than just light.

Sensor lights and smart design
for greater comfort, safety and atmosphere.

We have been making light smarter for over 35 years.

Whether for your home, garden, patio or driveway – indoors or outdoors: with sensor-controlled lighting from STEINEL, you can rely on comfort, safety and demand-based energy use. To this end, we develop and manufacture sensors and lights that set standards worldwide.

Enjoy the feeling of light that simply thinks for itself – with technology from STEINEL.

Table of contents

About STEINEL

Our lighting solutions 4

Connected Lighting 6

Products

Modern lights 8

Classic lights 54

Functional lights 70

Spotlights 84

Solar lights 108

Motion detectors 120

Developed in Germany. Manufactured in Europe.

STEINEL stands for quality "Made in Europe". Our outdoor lights are developed in Germany and manufactured in European factories – with the highest standards of precision, design and functionality. The result: reliable products that guarantee safety and comfort for many years to come.

We offer the right solution for every application:

Sensor **Outdoor luminaires with built-in sensors** only switch on when needed – this saves energy, increases safety and ensures comfortable and sustainable lighting.	Connect **Bluetooth Connect products** (SC and C) can be networked wirelessly, controlled via app and switched synchronously – for comprehensive lighting without additional cabling.
Solar **Solar lights** with high-quality solar modules combined with powerful batteries and efficient LED technology provide independent, electricity-free lighting – without any cable installation.	Wlan Cam **CAM lights** from STEINEL combine modern LED technology with a high-quality camera and intercom system. Connected via Wi-Fi, visitors can be seen and addressed in real time via smart-phone – even when you are on the move.
On **Outdoor lights with integrated twilight sensors** switch on when it gets dark and switch off again at daybreak. This allows you to enjoy atmospheric lighting around your home at all times.	No sensor **Outdoor lights without sensors** are simply switched on and off as required using a light switch. This means that sensor controlled and manual lights can be combined and networked in the same design.

Connected Lighting - packed with features.

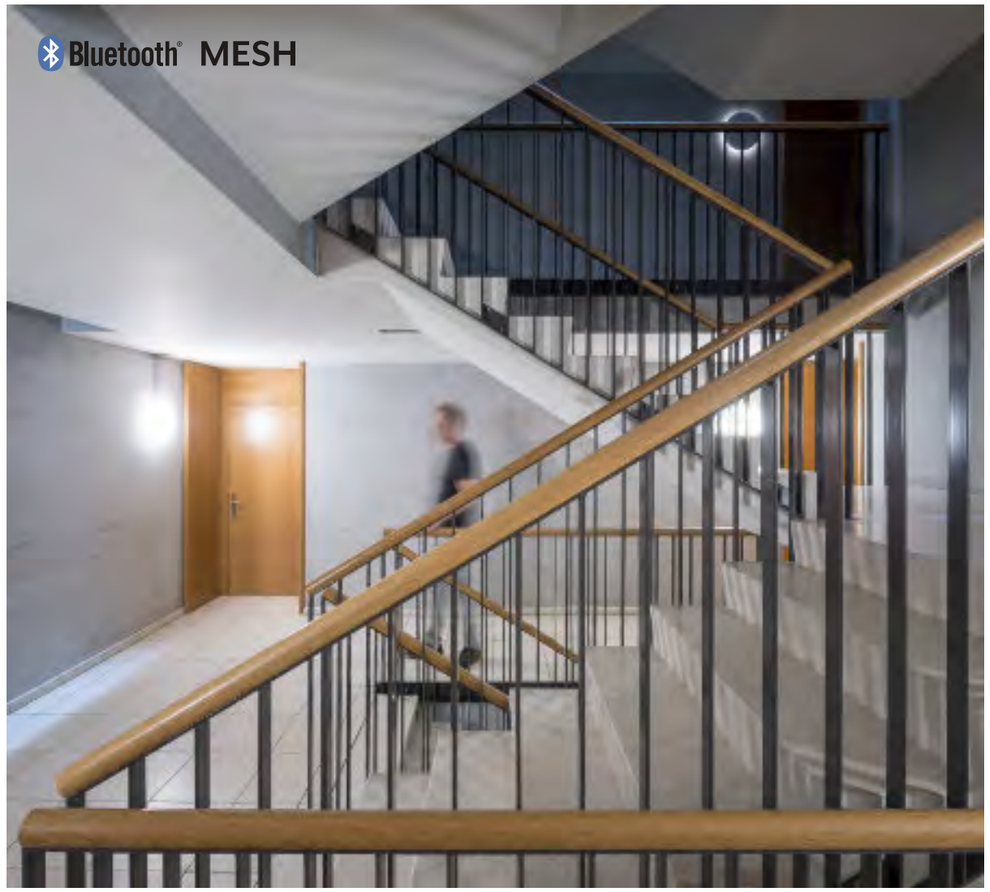

Neighbour Group Function

The Neighbour Group Function ensures that paths are safely illuminated without unnecessarily lighting up the entire building. This keeps it bright where people are moving – and dark where there's no need for light.

- If a luminaire detects movement, it activates its own group.
- Adjacent groups automatically switch to basic light level.
- Light leads the way for people moving around the building, while groups further away remain off.

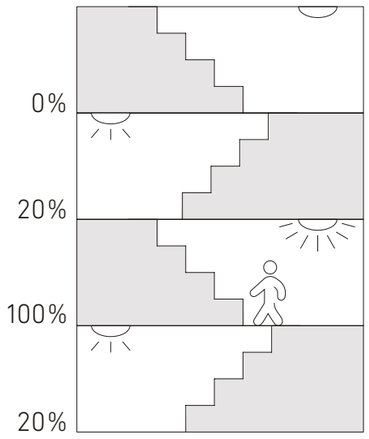

1-100 %

Integrated Lighting Management System

- Constant-light control for a consistent brightness level
- Optional adjustable basic light level
- Soft light start for gentle fade-up/ dimming up

17

Scheduler

The Scheduler function enables predictive, automated lighting control, increasing comfort, efficiency and planning reliability.

- Time- and day-based lighting control
- Individual settings for light levels, duration and basic light level

1 3 2 4

Push-button integration

Enables manual control of the Connected Lighting system – switching, dimming and scenes.

- Wired push-button input
- Wireless radio push-buttons via Bluetooth Mesh
- Wireless integration of existing switches via a Bluetooth Mesh push-button coupler

ON ON

Operating modes

Via push-button integration, presence detectors and luminaires can be flexibly controlled in fully or semi-automatic mode.

- Manual switch-on independent of presence
- Automatic switch-off based on time or brightness
- Combination of automatic and manual control

Data backup

Data can be backed up either locally or conveniently in the cloud. The free cloud backup offers the following benefits:

- Information is available anytime, anywhere
- Invite additional project participants
- Roles & permissions can be assigned flexibly
- Maximum security thanks to European servers

LUX Teach

Setting the twilight threshold or the setpoint for constant-light control – based on automatically measured light values, either now or at a defined time.

Modern outdoor lights.

Wall lights from STEINEL combine stylish design with intelligent technology – for lighting solutions that enhance any facade. They offer comfortable lighting, smart functions and create an atmosphere that warmly welcomes guests and residents alike.

L 800 SC | L 810 SC

Smart lighting. Stylishly integrated.

Connect Sensor

L 800 SC | Downlight
anthracite

L 810 SC | Up-/ Downlight
anthracite

silver



L 810 SC

L 800 SC

Order details

4007841 065690	L 800 SC	anthracite
4007841 087555	L 800 SC	silver
4007841 065706	L 810 SC	anthracite
4007841 087562	L 810 SC	silver

Without motion detector

4007841 079291	L 800 C	anthracite
4007841 079307	L 810 C	anthracite

Technical

L 800 SC: 7,5 W / 466 lm / 3000 K
L 810 SC: 9,8 W / 679 lm / 3000 K

Sensor 160°, 1-5 m, mounting height max. 2.5 m, invisible iHF sensor, networking and adjustment via Bluetooth, adjustable continuous light, basic light and main light, elegant soft light start, effective lighting downwards (L 800 SC) / upwards and downwards (L 810 SC)

This product contains a light source with energy efficiency class E (L800) D (L810)

L 820 SC

The ideal stage for your house number.

Connect Sensor

anthracite

silver



Order details

4007841 065713	L 820 SC	anthracite
4007841 087579	L 820 SC	silver

Technical

9.8 W / 679 lm / 3000 K, sensor 160°, 1-5 m, mounting height max. 2.5 m, invisible iHF sensor, networking and adjustment via Bluetooth, adjustable continuous light, basic light and main light, elegant soft light start, effective illumination of house number, including house number arch

This product contains a light source with energy efficiency class D

Professional Line

L 825 SC

Light at its best. Controlled via app.

Connect Sensor



Order details

4007841 059903 L 825 SC anthracite

Technical

9.87 W / 707 lm / 3000 K, sensor 160°, 1-5 m, mounting height max. 2.5 m, invisible iHF sensor, networking and adjustment via Bluetooth, adjustable continuous light, basic light and main light, elegant soft light start

This product contains a light source with energy efficiency class E

L 830 | L 835 | L 840 SC

Architectural lighting with brains.

Connect Sensor

L 830 SC

L 838 SC

L 840 SC

silver

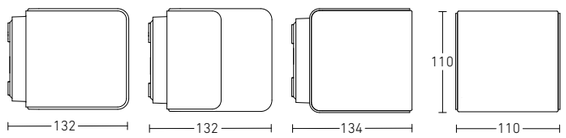

L 830 SC L 835 SC L 840 SC

Order details

4007841 055493	L 830 SC	anthracite
4007841 055509	L 830 SC	silver
4007841 055516	L 835 SC	anthracite
4007841 055523	L 835 SC	silver
4007841 055530	L 840 SC	anthracite
4007841 055547	L 840 SC	silver

Without motion detector

4007841 079253	L 830 C	anthracite
4007841 079260	L 835 C	anthracite
4007841 079277	L 840 C	anthracite

Technical

L 830 SC: max. 523 lm
L 835 SC: max. 616 lm
L 840 SC: max. 319 lm

9.1 W / 3000 K, sensor 160°, 1-5 m, mounting height max. 2.5 m, invisible iHF sensor, networking and adjustment via Bluetooth, adjustable continuous light, basic light and main light, elegant soft light start

This product contains a light source with energy efficiency class F

Professional Line

L 845 SC

Intelligent lighting meets modern design.

Connect Sensor



Order details

4007841 078645	L 845 SC	anthracite

Without motion detector

4007841 078638	L 845 C	anthracite

Technical

845 SC: 9 W / 655 lm / 3000 K
845 C: 9 W / 719 lm / 3000 K

Sensor 160°, 1-5 m, mounting height max. 2.5 m, invisible iHF sensor networking and adjustment via Bluetooth, adjustable continuous light, basic light and main light, elegant soft light start

This product contains a light source with energy efficiency class F

GL 80 SC

Light that adapts to your garden.

Connect Sensor

anthracite

silver

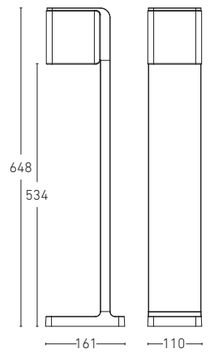

Order details

4007841 055479	GL 80 SC	anthracite
4007841 055486	GL 80 SC	silver

Without motion detector

4007841 079284	GL 80 C	anthracite

Technical

960 lm / 9.1 W / 3000 K, sensor 160°, 1-5 m, invisible iHF sensor, networking and adjustment via Bluetooth, adjustable continuous light, basic light and main light, elegant soft light start

This product contains a light source with energy efficiency class F

Professional Line

GL 85 SC 600 | 900

Elegance that illuminates the way.

Connect Sensor

anthracite

anthracite

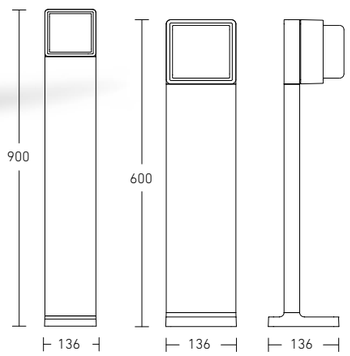

Order details

4007841 078683	GL 85 SC 900	anthracite
4007841 078669	GL 85 SC 600	anthracite

Without motion detector

4007841 078676	GL 85 C 900	anthracite
4007841 078652	GL 85 C 600	anthracite

Technical

GL 85 SC 900 | 600: 9 W / 655 lm / 3000 K
GL 85 C 900 | 600: 9 W / 719 lm / 3000 K

Sensor 160°, 1-5 m, invisible iHF sensor, networking and adjustment via Bluetooth, adjustable continuous light, basic light and main light, elegant soft light start

This product contains a light source with energy efficiency class F

L 270 | 271 digi SC

Perfectly designed. Light that thinks for itself.

Connect Sensor

L 271 digi SC

L 270 digi SC



L 271 digi SC



L 270 digi SC

Order details

4007841 067212	L 271 digi SC	anthracite
4007841 067205	L 270 digi SC	anthracite

Without motion detector

4007841 068714	L 271 digi C	anthracite

Technical

L 271 digi: 7,8 W / 637 lm / 3000 K
L 270 digi: 6,6 W / 566 lm / 3000 K

Sensor 180°, 8 m, mounting height max. 2.5 m, 3 detection zones can be digitally activated/deactivated, networking and adjustment via Bluetooth, adjustable continuous light, basic light and main light, elegant soft light start, L 270 digi SC with self-illuminated house number panel, including house number sheet

This product contains a light source with energy efficiency class E

L 40 | 42 SC

Digital control. Visibly more light.

Connect Sensor

L 40 SC

L 42 SC



L 40 SC



L 42 SC

Order details

4007841 085247	L 40 SC	anthracite
4007841 085261	L 42 SC	anthracite

Without motion detector

4007841 085230	L 40 C	anthracite
4007841 085254	L 40 C	anthracite

Technical

L 40 SC: 12,9 W / max. 930 lm / 3000 K
L 42 SC: max. 13 W / max. 889 lm / 3000 K

Sensor 180°, 12 m, mounting height max. 2.5 m, networking and adjustment via Bluetooth, adjustable continuous light, basic light and main light, elegant soft light start

L 40: This product contains a light source with energy efficiency class E (with sensor) or F (without sensor) L 42: This product contains a light source with energy efficiency class F (with sensor) or E (without sensor)

L 940 SC

Slim. Smart. Sensor-controlled.

Connect | Sensor | E27 Replaceable light bulb



Order details

4007841 087739	L 940 SC	anthracite

Without motion detector

4007841 087746	L 940 C	anthracite
4007841 087753	L 940	anthracite

Technical

2x 620 lm, 14.5 W, 3000 K, sensor 180°, 8.5 m, mounting height max. 4 m, networking and adjustment via Bluetooth, GU10 LED bulb replaceable.

This product contains a light source with energy efficiency class F.

L 930 S

Light that brings facades to life.

Sensor



Order details

4007841 067199	L 930 S	anthracite

Without motion detector

4007841 078713	L 930	anthracite

Technical

457 lm, 9.3 W, 3000 K, sensor 140°, 12 m, mounting height max. 2.5 m, up/downlight, adjustable continuous light and basic light, elegant soft light start, networking via cable (max. 10 lights), aluminium housing

This product contains a light source with energy efficiency class D

L 605 S

Light aesthetics in its most beautiful form.

Sensor



Order details

4007841 065287	L 605 S	anthracite

Without motion detector

4007841 069506	L 605	anthracite

Technical

729 lm, 11.3 W, 3000 K, sensor 180°, 10 m, mounting height max. 2 m, adjustable basic light and continuous light, elegant soft light start, 4 intelligent programmes, aluminium housing with opal glass.

This product contains a light source with energy efficiency class E

L 625 CAM SC

Smart. Safe. Intelligent.

Wlan | Cam | Connect | Sensor



Order details

4007841 092597 L 625 CAM SC anthracite

Technical

925 lm, 14 W, 3000 K, 180° sensor, 10 m, max. mounting height 2 m, 2K camera, intercom, local recording on micro SD, adjustable basic and main light, IP44, aluminium housing with opal glass

This product contains a light source with energy efficiency class E

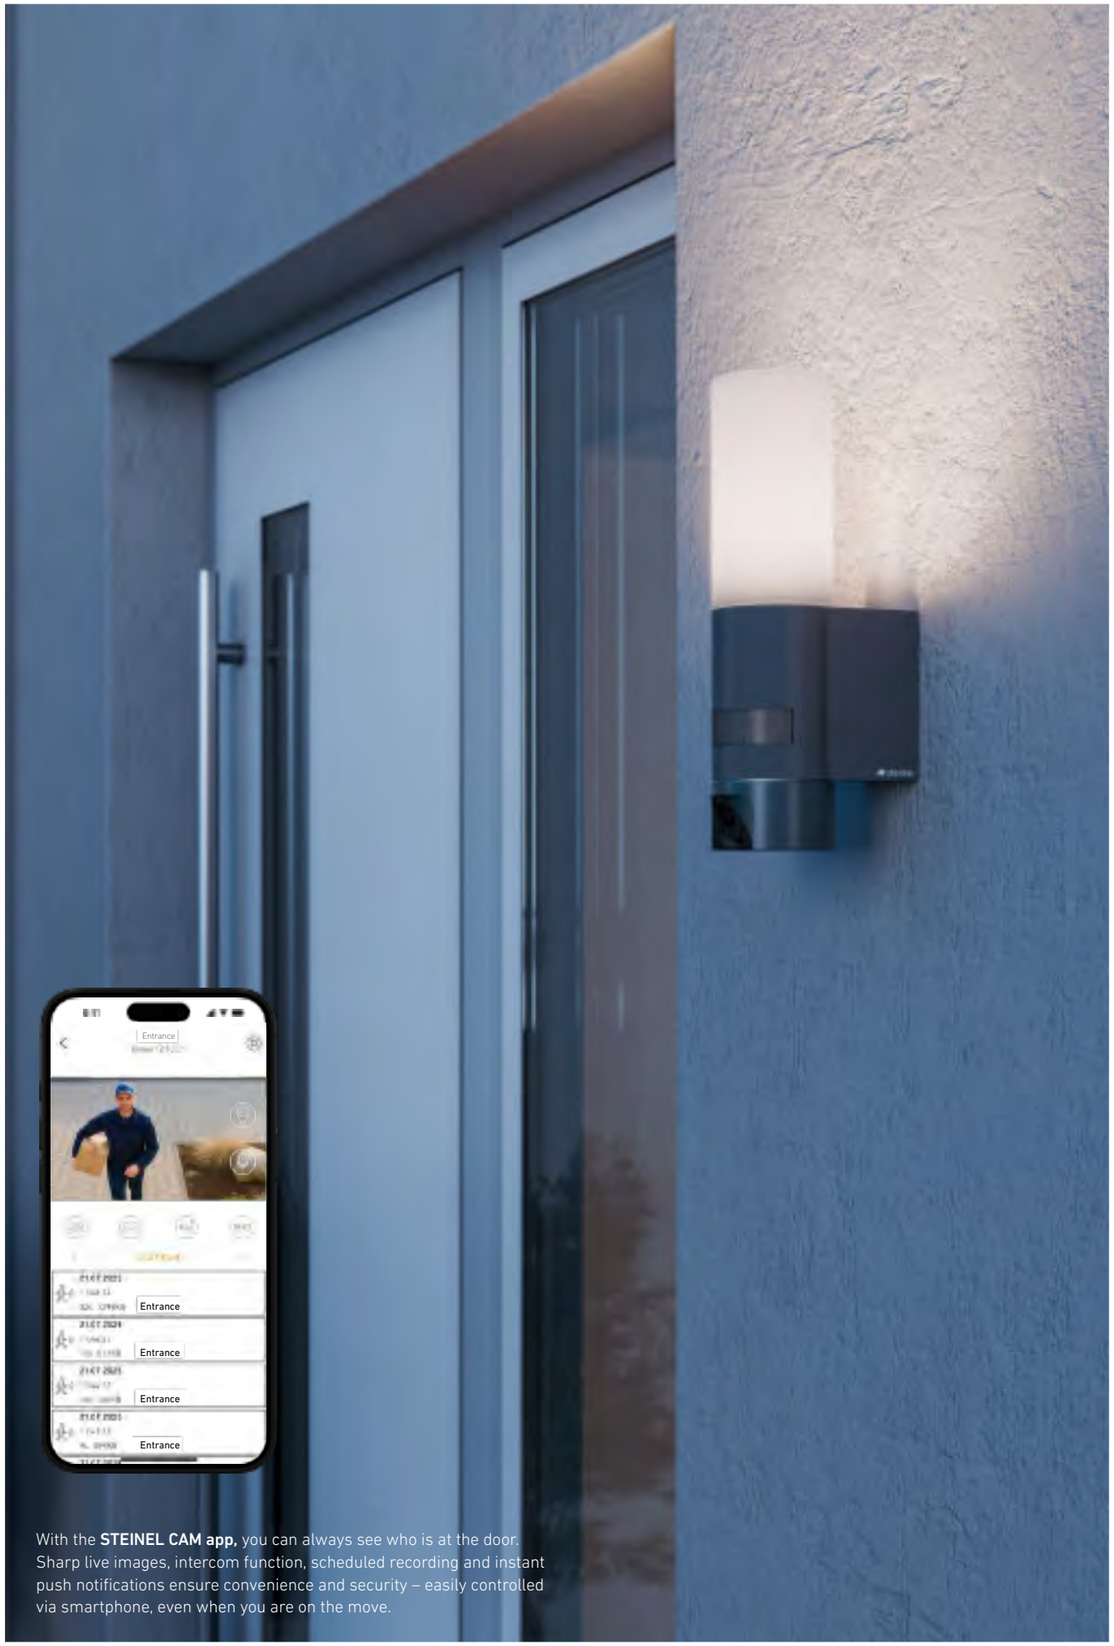

With the **STEINEL CAM app,** you can always see who is at the door. Sharp live images, intercom function, scheduled recording and instant push notifications ensure convenience and security – easily controlled via smartphone, even when you are on the move.

GL 65 S

Lights the way. And thinks for itself.

Sensor



Order details

4007841 069476	GL 65 S	anthracite

Without motion detector

4007841 069469	GL 65	anthracite

Technical

575 lm, 8.7 W, 3000 K, sensor 180°, 8 m, adjustable basic light and continuous light, elegant soft light start, 4 intelligent programmes, aluminium housing with opal glass

This product contains a light source with energy efficiency class E

GL 60 S

Light for paths you enjoy walking.

Sensor

E27

Replaceable light bulb



Order details

4007841 007881	GL 60 S	stainless steel

Technical

781 lm, 9.8 W, 3000 K, 360° sensor, max. Ø 24 m, including LED bulb, elegant soft light start, adjustable continuous light and basic light, base can be shortened, high-quality opal glass

This product contains a light source with energy efficiency class F

L 240 S

Style meets safety.

Sensor

stainless steel

anthracite



Order details

4007841 010461	L240 S	stainless steel
4007841 056506	L240 S	anthracite

Technical

946 lm, 9.3 W, 3000 K, sensor 180°, max. 10 m, mounting height max. 3 m, stainless steel cover, sensor can be swivelled vertically by 90°

This product contains a light source with energy efficiency class D

L 260 S

Straightforward. Bright. Reliable.

Sensor

E27

Replaceable light bulb



Order details

4007841 007874	L260 S	stainless steel

Technical

703 lm, 9.9 W, 3000 K, sensor 240°, Ø max. 24 m, mounting height max. 6 m, including LED light source, elegant soft light start, optional continuous light 4 hours, high-quality opal glass

This product contains a light source with energy efficiency class F

L 910 S

Clear design. Strong effect.

Sensor

anthracite

silver



Order details

4007841 576202	L 910 S	anthracite
4007841 576219	L 910 S	silver

Without motion detector

4007841 078720	L 910	anthracite

Technical

797 lm, 9.8 W, 3000 K, sensor 180°, 5/12 m, mounting height max. 2.50 m, can be networked via cable, sensor integrated so as to be almost invisible, effect lighting on the wall, elegant soft light start, optional continuous light for 4 hours.

This product contains a light source with energy efficiency class E

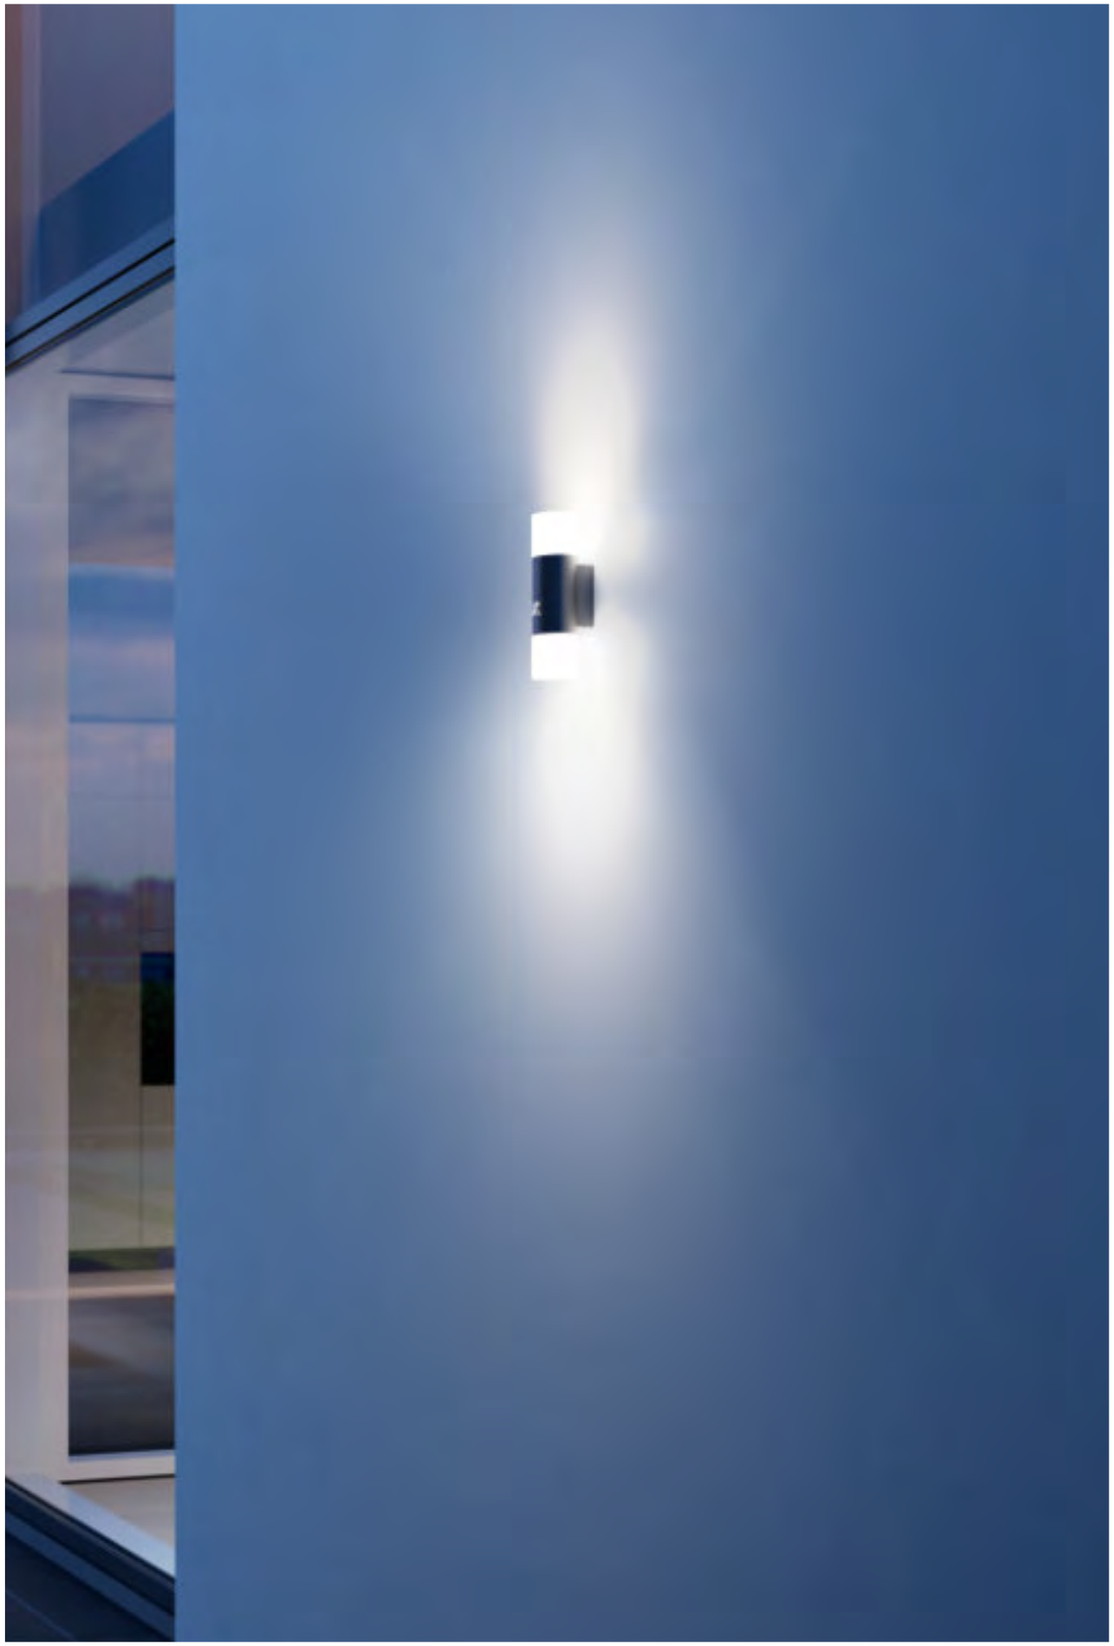

L 20 S

Reliable light for every day.

Sensor

E27

Replaceable light bulb

anthracite

stainless steel



Order details

4007841 035693	L 20 S	anthracite
4007841 566814	L 20 S	stainless steel

Technical

Max. 60 W / E27, sensor 180°, max. 10 m, mounting height max. 3 m, elegant ambient light, impact-resistant IK07, sensor 90° vertically swivelling

Suitable for LED bulbs

L 22 S

Classic in appearance. Modern in thinking.

Sensor

E27

Replaceable light bulb

anthracite

stainless steel



Order details

4007841 035709	L 22 S	anthracite
4007841 009816	L 22 S	stainless steel

Without motion detector

4007841 069254	L 22	anthracite

Technical

Max. 60 W / E27, sensor 180°, max. 10 m, mounting height 3 m, elegant ambient light, impact-resistant IK07, sensor 90° vertically swivelling

Suitable for LED bulbs

L 30 S

Light that welcomes you.

Sensor

E27

Replaceable light bulb



Order details

4007841 068899	L 30 S	anthracite

Without motion detector

4007841 068882	L 30	anthracite

Technical

Max. 15 W / E27, sensor 180°, max. 10 m, mounting height max. 3 m, elegant ambient light, impact-resistant IK07, sensor 90° vertically swivelling

Suitable for LED bulbs

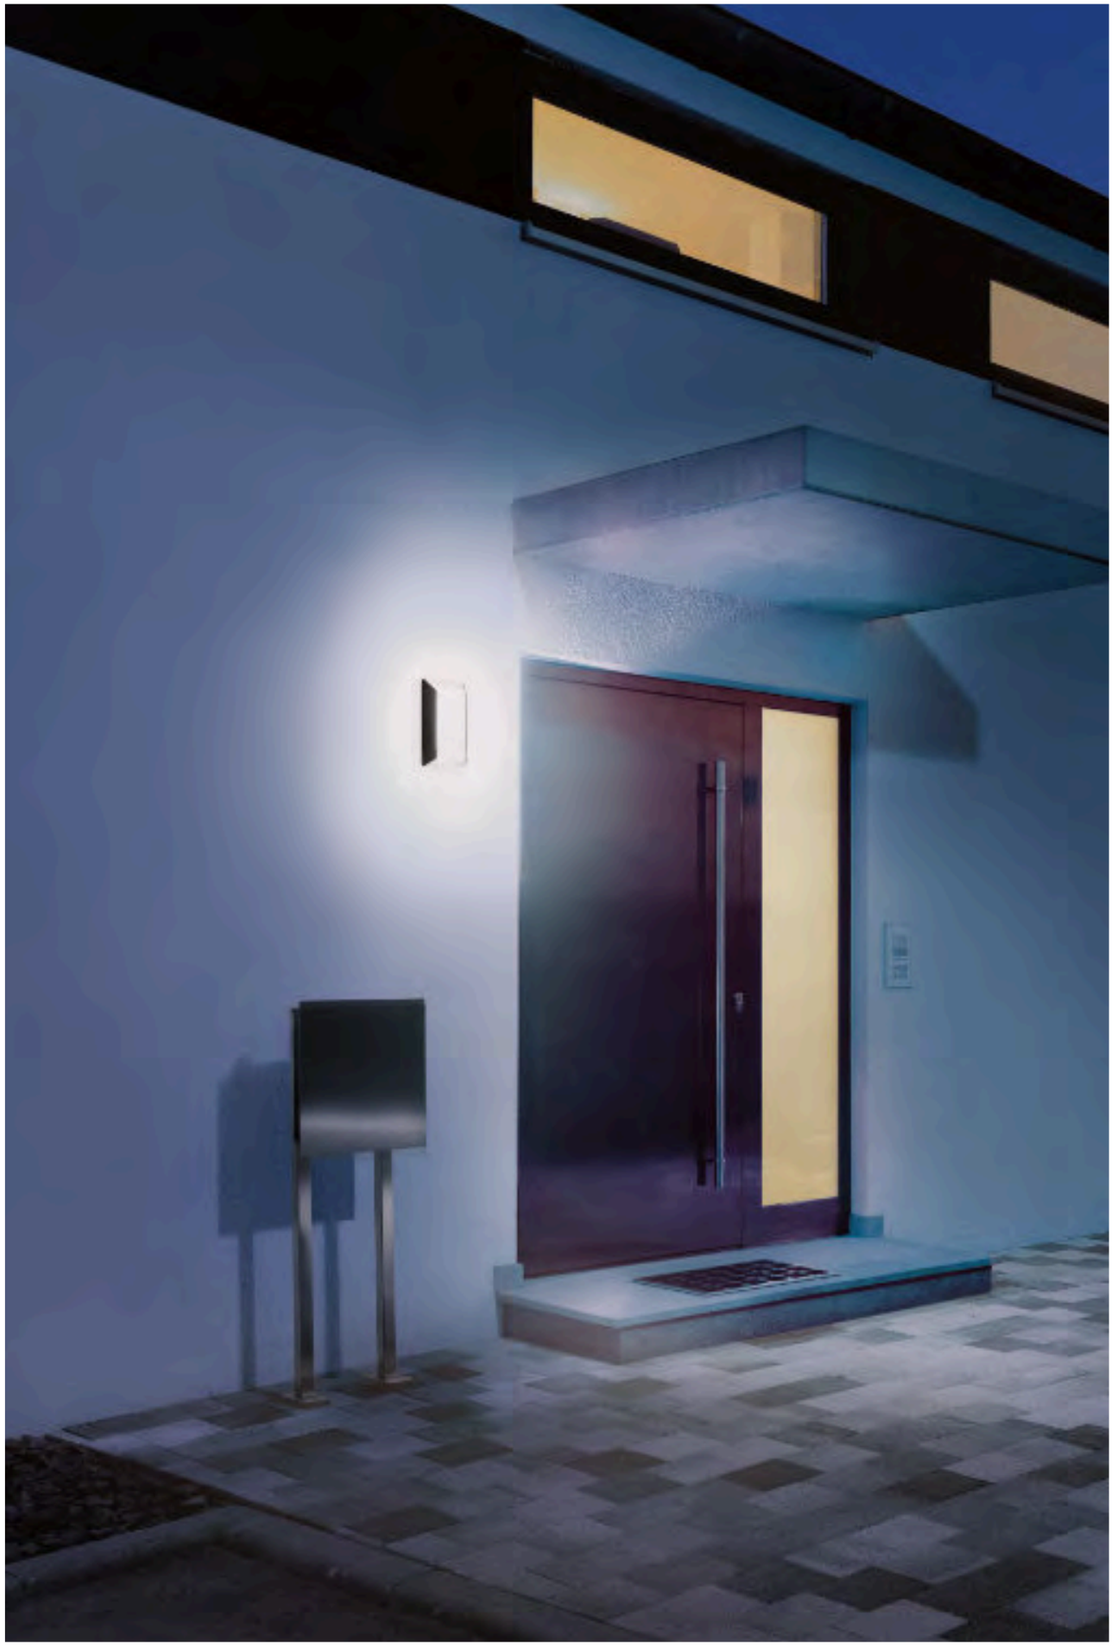

L 12 S

Small in size. Big in light.

Sensor

E27

Replaceable light bulb

anthracite

silver



Order details

4007841 657819	L 12 S	anthracite
4007841 657918	L 12 S	silver

Without motion detector

4007841 069155	L 12	anthracite

Technical

Max. 60 W / E27, sensor 180°, max. 10 m, mounting height max. 3 m, sensor 90° vertically swivelling

Suitable for LED bulbs

Classic meets sensor technology.

State-of-the-art lighting technology – reliably packaged in a timeless, elegant design. That's STEINEL too. Whether for classic architecture or individual preferences: we offer the right lighting solution for every requirement.

Functional, stylish – and made for you.

Professional Line

L 400 S

The classic. Completely upgraded.

Sensor

E27

Replaceable light bulb

white

black



Order details

4007841 611118	white
4007841 611019	black

Technical

Max. 60 W / E27, sensor 240°, max. 12 m, mounting height max. 6 m, adjustable continuous light and basic light, elegant soft light start, hand-blown crystal glass with decorative bubble inclusion

Suitable for LED bulbs.

L 115 S

Particularly vigilant. And a bright spark.

Sensor

E27

Replaceable light bulb

white

anthracite



Order details

4007841 657413	L 115 S	white
4007841 059880	L 115 S	anthracite

Technical

Max. 60 W / E27, sensor 240°, max. 12 m, mounting height max. 6 m, adjustable continuous light and basic light, elegant soft light start, hand-blown glass ball.

Suitable for LED bulbs.

L 560 S

Classic shape. Intelligent light.

Sensor

E27

Replaceable light bulb

black

white



Order details

4007841 634216	L 560 S	black
4007841 634315	L 560 S	white

Technical

Max. 60 W / E27, sensor 140°, max. 12 m, mounting height max. 3 m, hand-blown crystal glass.

Suitable for LED bulbs.

L 585 S

Timelessly beautiful. Automatically bright.

Sensor

E27

Replaceable light bulb

anthracite

black

white



Order details

4007841 035723	L 585 S	anthracite
4007841 005535	L 585 S	black
4007841 005917	L 585 S	white

Technical

Max. 60 W / E27, sensor 180°, max. 12 m, mounting height max. 3 m, hand-blown glass ball.

Suitable for LED bulbs.

L 15 S

Classic in design. Modern in thinking.

Sensor

E27

Replaceable light bulb

black

white



Order details

4007841 617813	L 15 S	black
4007841 617912	L 15 S	white

Without motion detector

4007841 069179	L 15	black
4007841 069186	L 15	white

Technical

Max. 60 W / E27, sensor 180°, max. 10 m, mounting height max. 3 m, sensor 90° vertically swivelling

Suitable for LED bulbs

L 190 S

Timelessly beautiful look. Timelessly beautiful light.

Sensor

E27

Replaceable light bulb

white

black



Order details

4007841 644512	L190 S	white
4007841 644413	L190 S	black

Technical

Max. 100 W / E27, sensor 180°, 5/12 m, mounting height max. 4 m, optional basic light 0-50% and continuous light 4 hours, elegant soft light start

Suitable for LED bulbs

L 10 S

Nostalgia meets modernity.

Sensor

E27

Replaceable light bulb



Order details

4007841 084769	L 10 S	black

Without motion detector

4007841 084752	L 10	black

Technical

Max. 15 W / E27, sensor 180°, max. 7.5 m, mounting height max. 3 m, integrated reflector foil for optimum illumination.

Suitable for LED bulbs

Functional lights that think for themselves.

At STEINEL, functionality is the focus – from elegant house number lights to sensor-controlled ceiling lights with four individually adjustable sensor areas. Well thought-out down to the last detail.

For intelligent solutions that adapt – and simply work. For you.

Professional Line

L 690 S | 691 S

Square. Functional. Reliable.

Sensor

L 690 S

L 691 S



L 690 S



L 691 S

Order details

4007841 053000	L 690 S	anthracite
4007841 053031	L 691 S	anthracite

Technical

L 690 S: 8,5 W / 700 lm / 3000 K
L 691 S: 8,5 W / 576 lm / 3000 K

360° sensor, 7 m, max. mounting height 2.5 m, can be networked via cable, adjustable continuous light and basic light, elegant soft light start, 4 intelligent programmes, aluminium housing, IK07, L 690 S Including house number sheet

This product contains a light source with energy efficiency class D

Professional Line

L 330 S | 331 S

Robust. Timeless. Reliable.

Sensor

L 330 S

L 331 S



L 330 S



L 331 S

Order details

4007841 053079	L 330 S	anthracite
4007841 053093	L 331 S	anthracite

Technical

L 330 S: 8,4 W / 815 lm / 3000 K
L 331 S: 8,4 W / 711 lm / 3000 K

360° sensor, 7 m, max. mounting height 2.5 m, networkable via cable, adjustable continuous light and basic light, elegant soft light start, 4 intelligent programmes, aluminium housing, IK10

This product contains a light source with energy efficiency class D

L 22 N

Simply light. Simply beautiful.

On

E27

Replaceable light bulb

anthracite



Order details

4007841 035709	L 22 N	anthracite

Technical

Max. 60 W / E27 socket, integrated twilight sensor (2–50 lux), elegant ambient light, protection class IP44, impact resistance IK07, aluminium housing with opal white plastic glass

Suitable for LED bulbs

L 1 S

Light that welcomes you.

Sensor

E27

Replaceable light bulb

black

white



Order details

4007841 650612	L 1 S	black
4007841 650513	L 1 S	white

Technical

Max. 60 W / E27, sensor 180°, max. 10 m mounting height max. 3 m, impact resistant IK07, sensor 90° vertically swivelling, including house number sheet

Suitable for LED bulbs

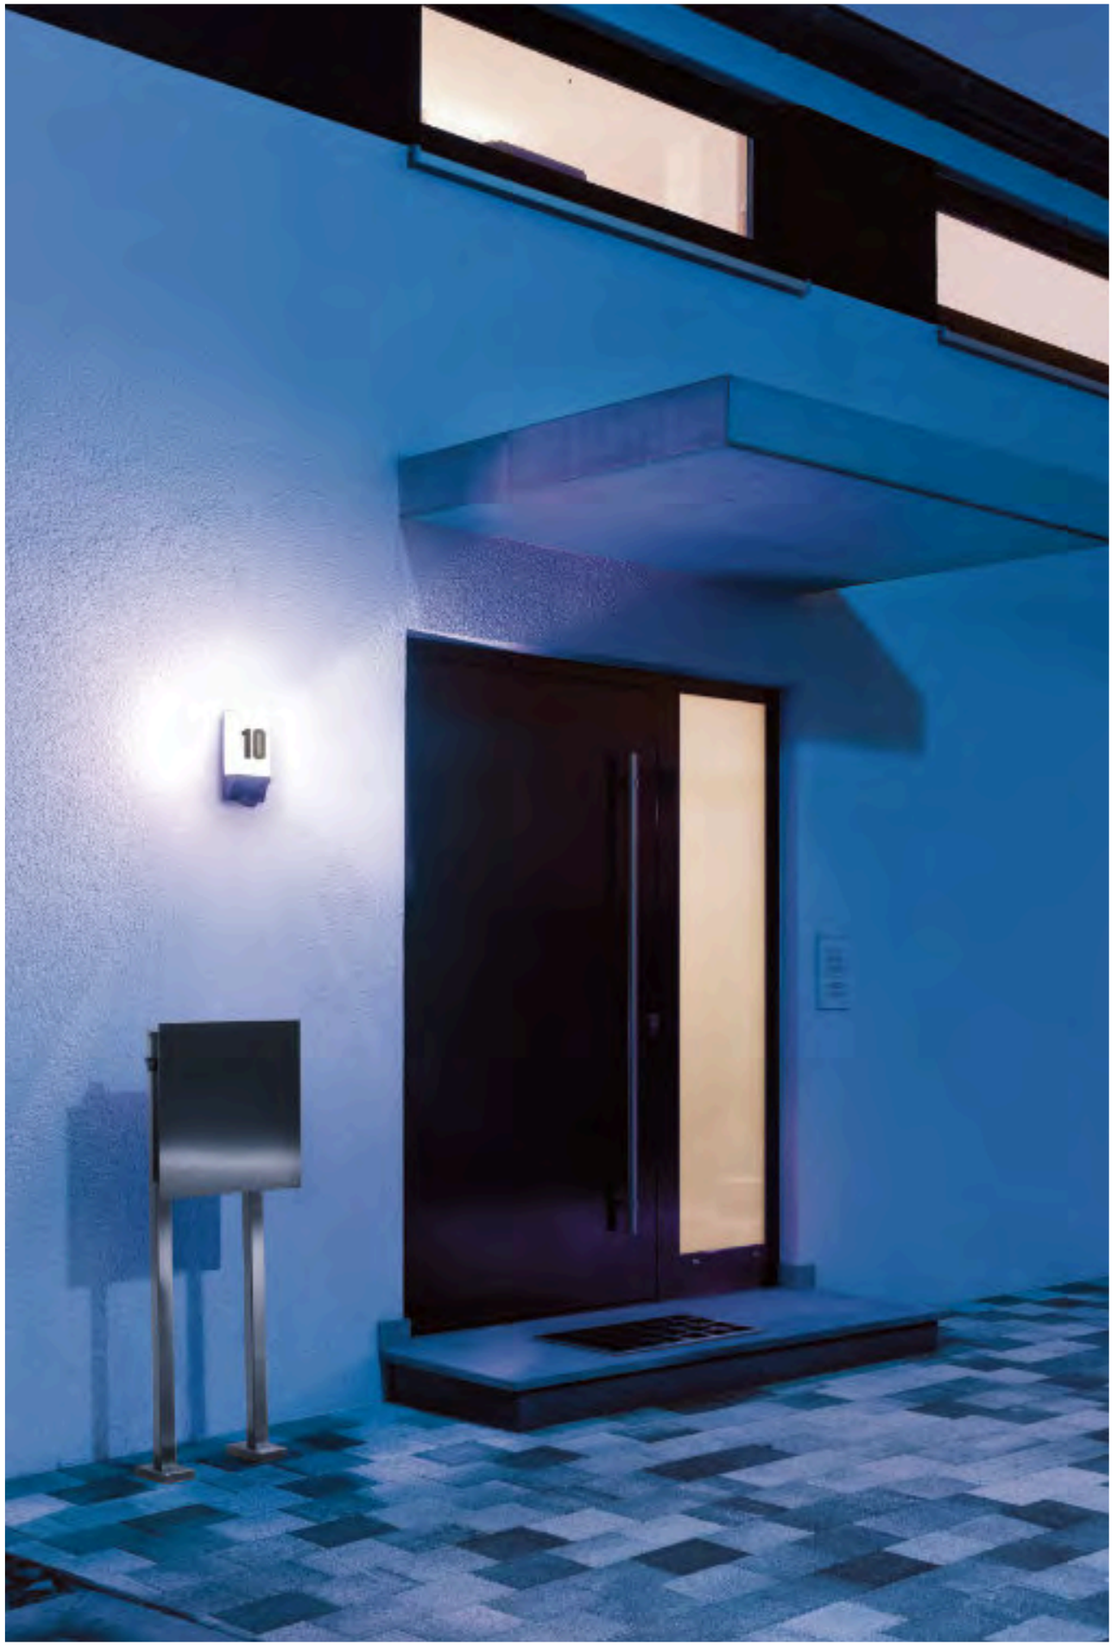

LN 1 N

Your home. At first glance.

On



Order details

4007841 649715	LN 1 N	white

Technical

440 lm, 4.5 W, 3000 K, with twilight switch, light switches on automatically in the evening and off in the morning, impact-resistant IK07, including house number sheet

This product contains a light source with energy efficiency class E

DL Vario Quattro PRO S

Precise detection. Maximum control.

Sensor



Order details

4007841 068196	DL Vario Quattro PRO S	neutral white
4007841 068202	DL Vario Quattro PRO S	warm white

Technical

1,430 lm, 14 W, 3000 / 4000 K, 360° sensor, range 2–8 m (adjustable in each direction), mounting height up to 6 m, can be networked via cable, adjustable continuous light and basic light, IK07

This product contains a light source with energy efficiency class D

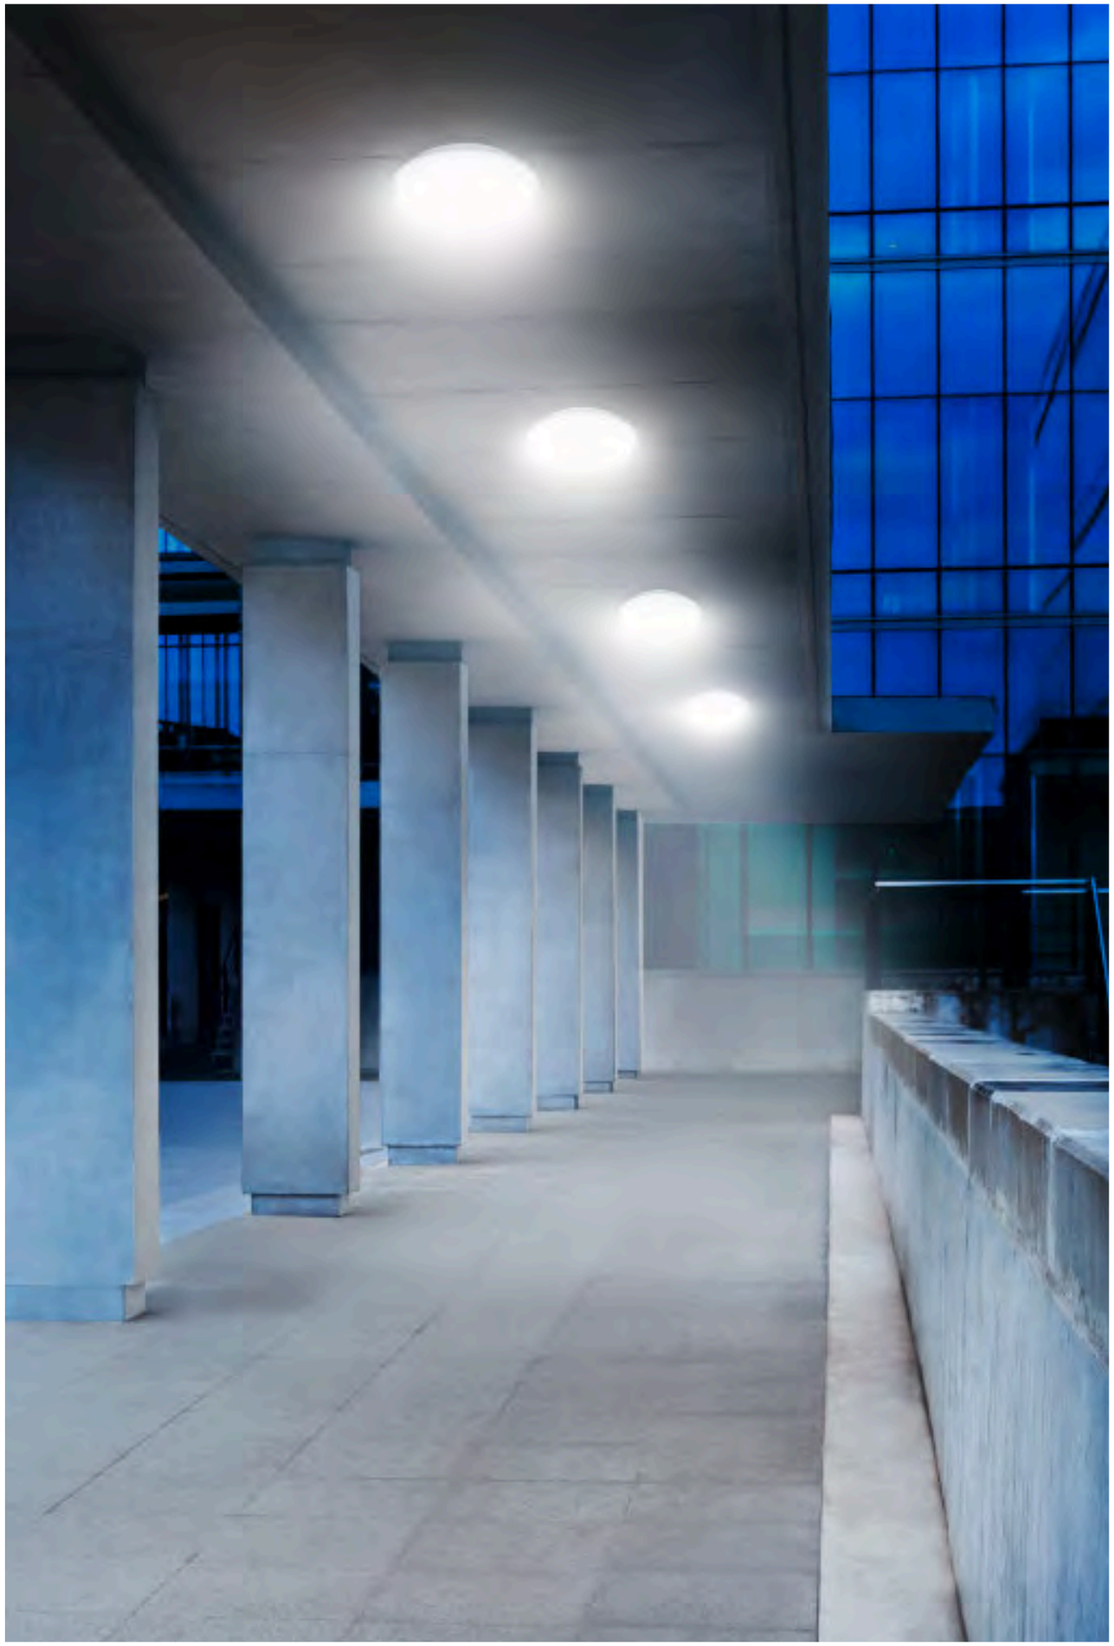

Spotlights with vision.

Whether it's your driveway, house wall or garden path – our powerful LED spotlights reliably illuminate even the most remote corners. For greater security, targeted lighting and a feeling of safety around the house.

When it matters: light that sees everything.

Home & Garden

XLED home 2 SC

Stylish, smart and reliable.

Connect Sensor

black

white anthracite silver



Order details

4007841 065447	XLED home 2 SC	black
4007841 065454	XLED home 2 SC	white
4007841 033071	XLED home 2 S	black
4007841 033088	XLED home 2 S	white
4007841 033064	XLED home 2 S	anthracite
4007841 033057	XLED home 2 S	silver

Without motion detector

4007841 033118	XLED home 2	black
4007841 033125	XLED home 2	white
4007841 033095	XLED home 2	anthracite

Technical

1,550 lm, max. 13.8 W, 3000 K, 180° sensor, 10 m, max. mounting height 4 m, networking and adjustment via Bluetooth, rotatable and swivelling LED floodlight with aluminium heat sink, durable opal white plastic housing

This product contains a light source with energy efficiency class E

XLED Protect S

Light that makes safety visible.

Sensor

anthracite

white



Order details

4007841 090012	XLED Protect S	anthracite
4007841 089894	XLED Protect S	white

Without motion detector

4007841 090029	XLED Protect	anthracite
4007841 090005	XLED Protect	white

Technical

1,642 lm, max. 14.3 W, 3,000 K, 180° sensor, 10 m, mounting height max. 4 m, fully swivelling light head and sensor, 180° panoramic light

This product contains a light source with energy efficiency class E

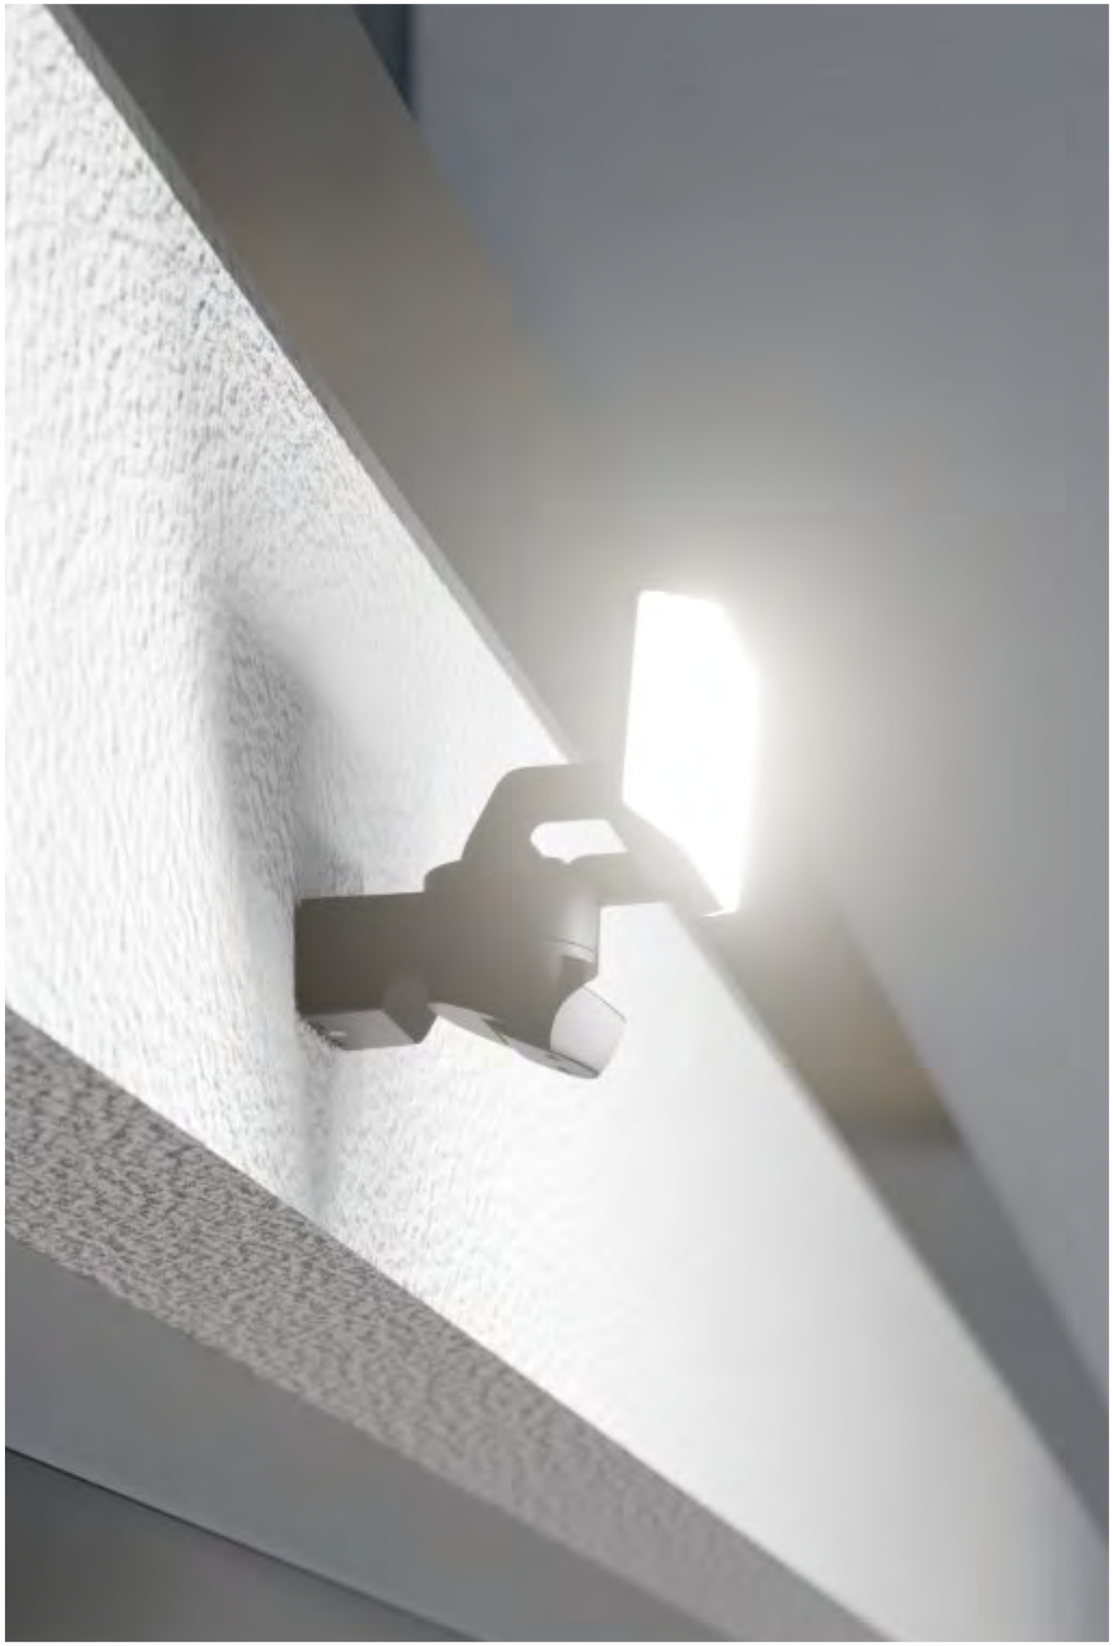

XLED PRO 240 S

Light. Right where you need it.

Sensor

black

graphite

white



Order details

4007841 068110	XLED PRO 240 S	black
4007841 068066	XLED PRO 240 S	graphite
4007841 068073	XLED PRO 240 S	white

Without motion detector

4007841 068097	XLED PRO 240	black
4007841 068080	XLED PRO 240	graphite
4007841 068103	XLED PRO 240	white

Technical

1,834 lm, 20 W, 4000 K, sensor 240°, Ø max. 24 m, mounting height max. 6 m, flat design panel can be swivelled in all directions, HCMC cooling system minimises heat build-up, includes corner wall bracket

This product contains a light source with energy efficiency class E

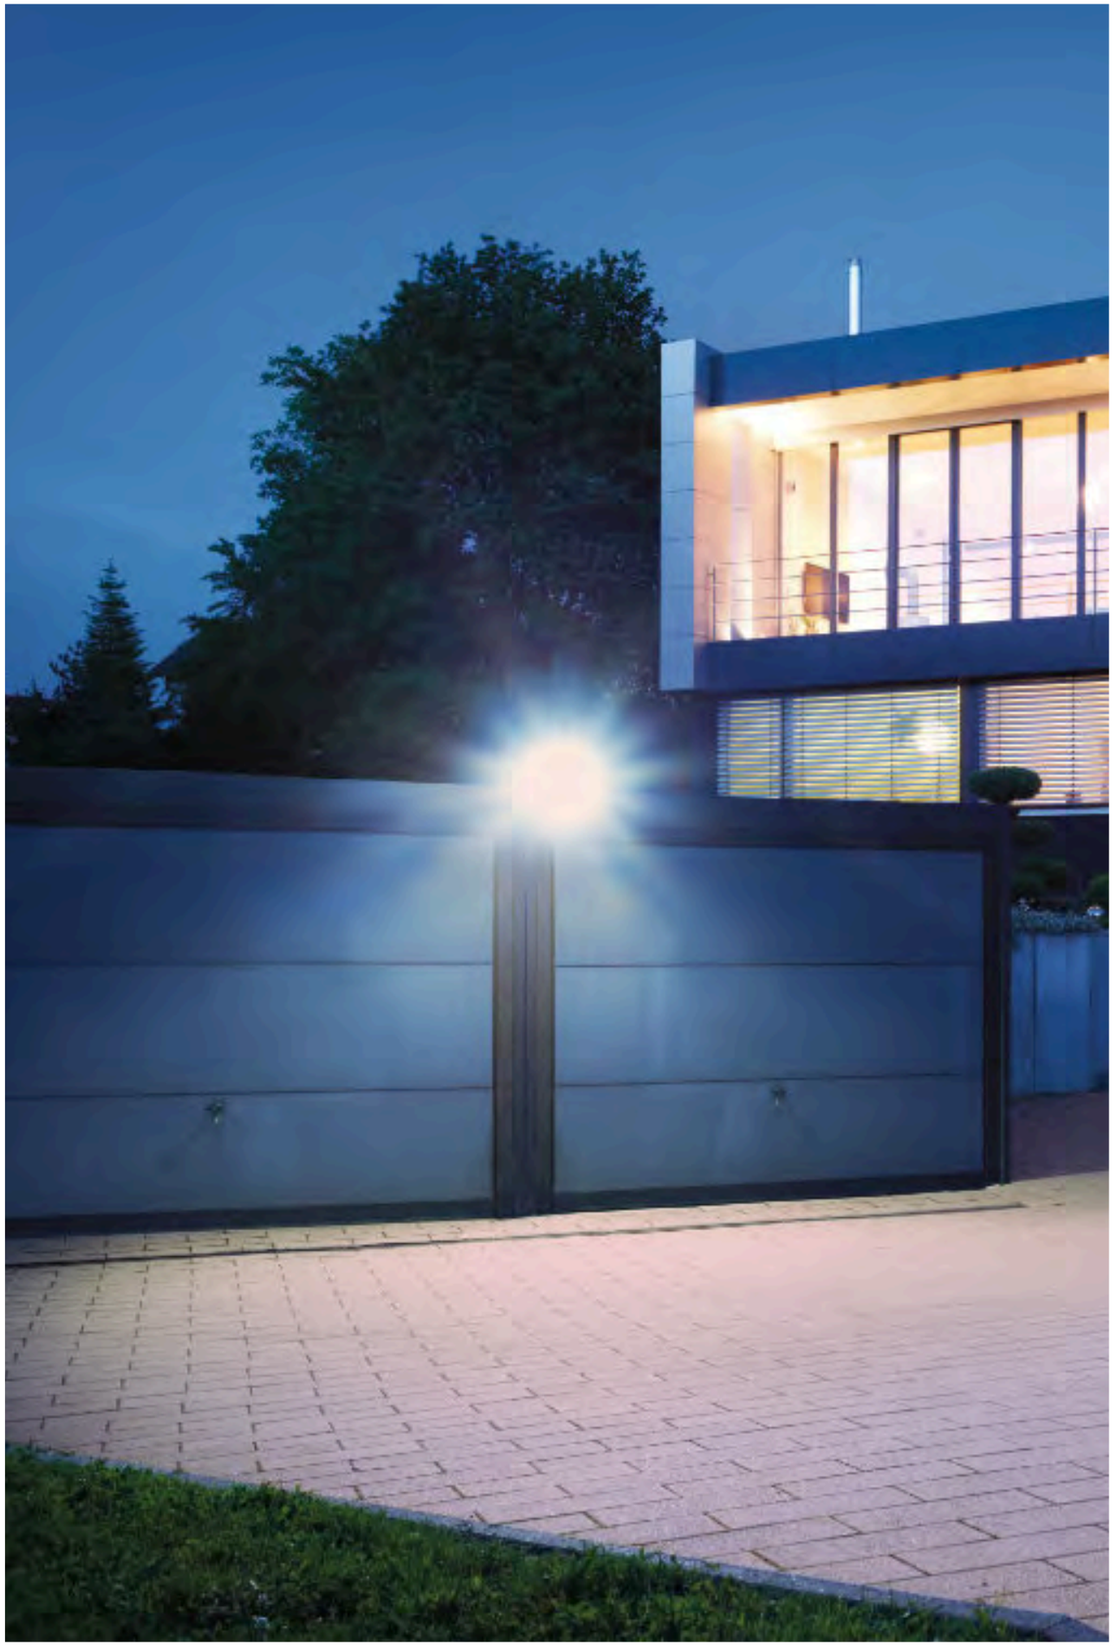

Professional Line

XLED PRO Expanse

Powerful light. Smart technology.

Connect Sensor

anthracite

white



Order details

4007841 091200	XLED PRO Expanse S	anthracite
4007841 091217	XLED PRO Expanse S	white
4007841 093938	XLED PRO Expanse SC	anthracite
4007841 093945	XLED PRO Expanse SC	white

Without motion detector

4007841 091224	XLED PRO Expanse	anthracite
4007841 091231	XLED PRO Expanse	white

Technical

1,642 lm, 14.3 W, 115 lm/W, 3,000 K, sensor 240°, Ø max. 12 m, mounting height max. 6 m, flat design panel can be swivelled in all directions

This product contains a light source with energy efficiency class E

XLED curved S

Design meets sensor light.

Sensor

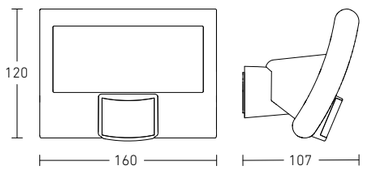

Order details

4007841 012076	XLED curved S	anthracite

Technical

862 lm, 9.3 W, 3000 K, sensor 160°, 8 m, Maximum mounting height 4 m, swivelling spotlight head (30°), protection class IP44, protection class II, impact resistance IK03

This product contains a light source with energy efficiency class F

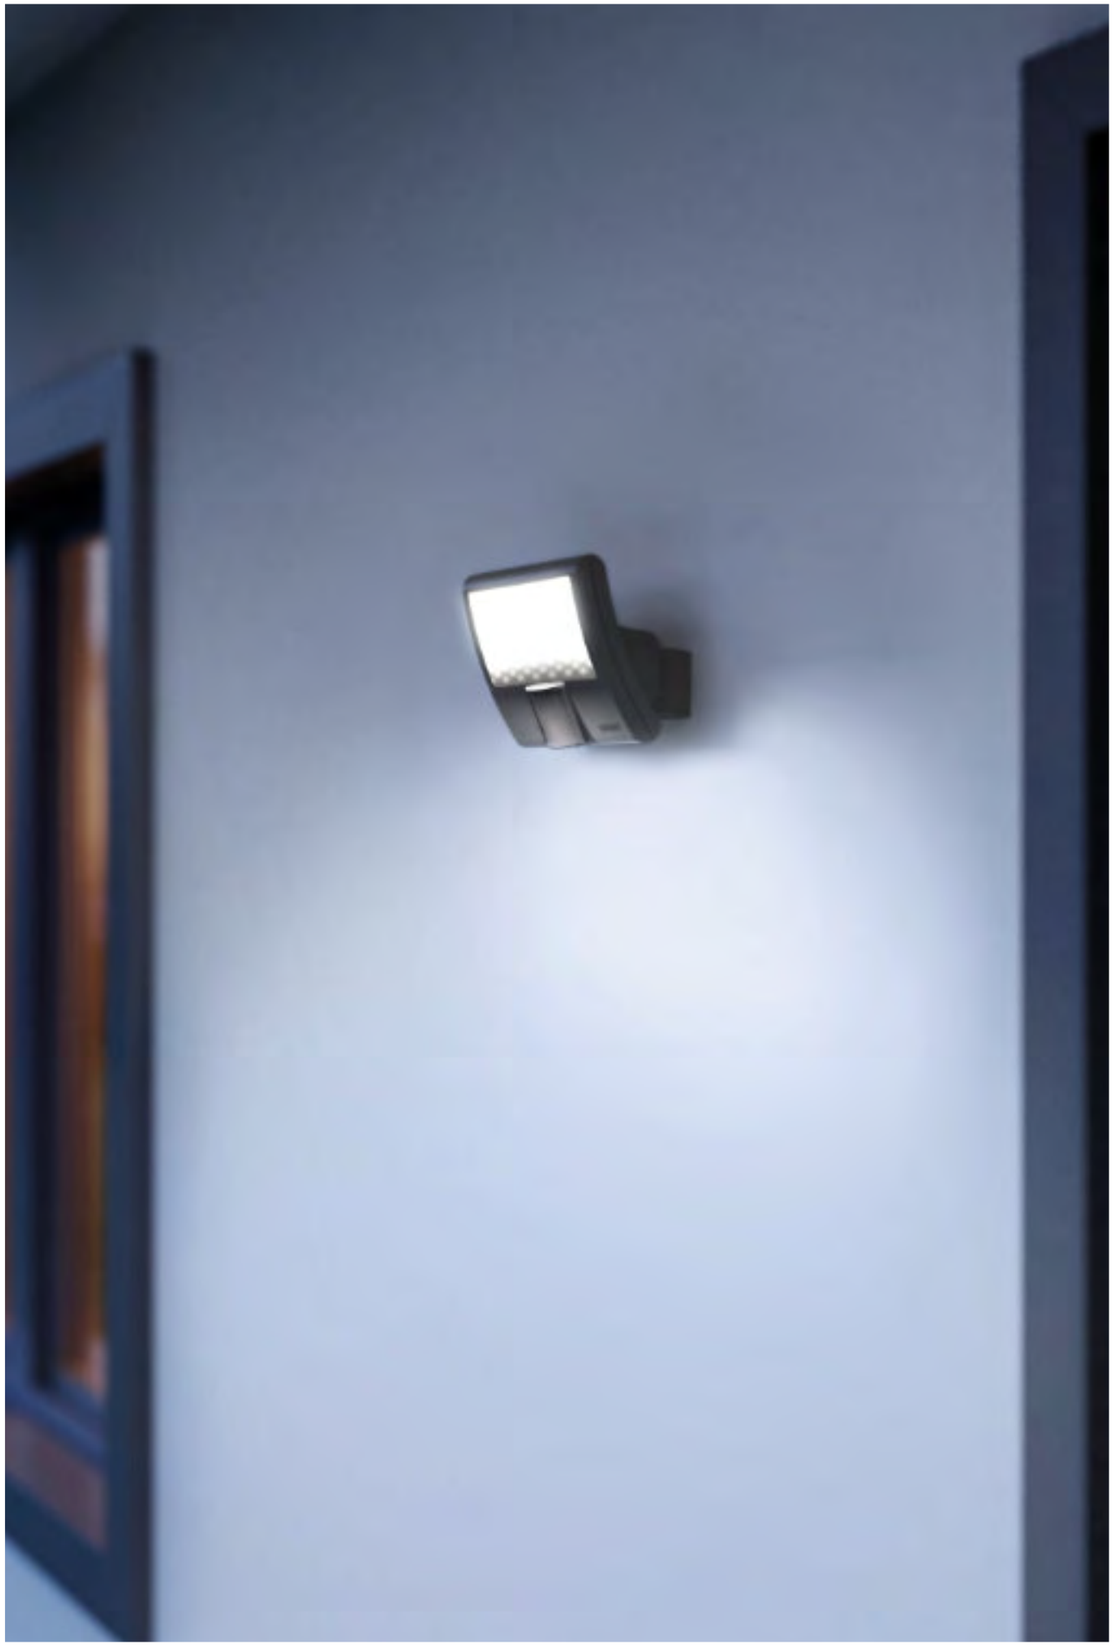

XLED slim S

Flat. Powerful. To the point.

Sensor



Order details

4007841 012052	XLED slim S	anthracite

Technical

648 lm, 7.2 W, 3000 K, sensor 160°, 8 m, mounting height max. 4 m, intelligent cooling system, protection class IP44, impact resistance IK03

This product contains a light source with energy efficiency class F

LS 150 S

Light that reaches every corner.

Sensor

white

black



Order details

4007841 052553	LS 150 S	white
4007841 052546	LS 150 S	black

Without motion detector

4007841 069223	LS 150	white
4007841 069216	LS 150	black

Technical

1,375 lm, 14.7 W, 4,000 K, sensor 240°, 12 m, mounting height max. 4 m, swivelling spotlight head (horizontal 80°, vertical 150°), swivelling sensor (horizontal 160°), protection class IP44, aluminium housing

This product contains a light source with energy efficiency class E

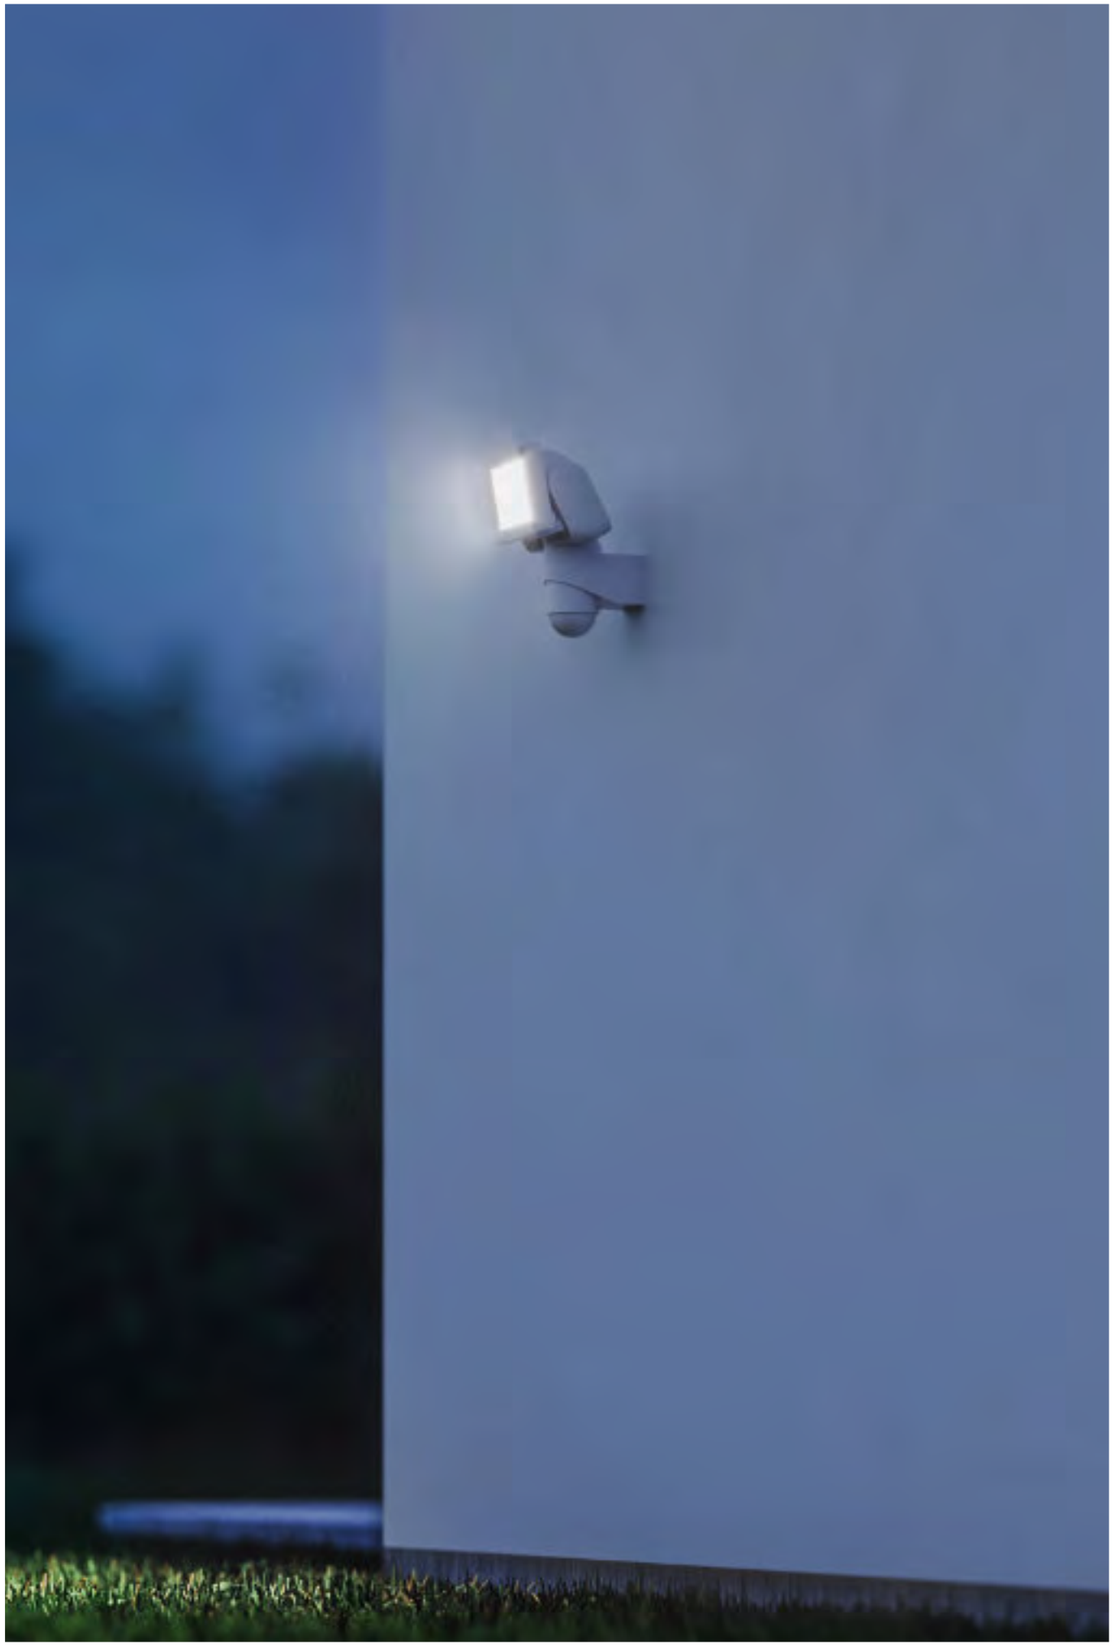

LS 300 S

Radiance on a grand scale.

Sensor

white

black



Order details

4007841 067588	white
4007841 067571	black

Without motion detector

4007841 069247	white
4007841 069230	black

Technical

2,704 lm, 29.5 W, 4,000 K, sensor 240°, 12 m, swivelling spotlight head (horizontal 80°, vertical 150°), protection class IP44, protection class I, impact resistance IK03, aluminium housing

This product contains a light source with energy efficiency class F

Spot DUO SC | Spot ONE SC

Modern LED wall spotlights with movement capabilities.

Connect | Sensor | GU 10 Replaceable light bulb

Spot DUO SC

Spot ONE SC



Spot DUO SC



Spot ONE SC

Order details

4007841 058654	Spot DUO SC	anthracite
4007841 058647	Spot DUO S	anthracite
4007841 058630	Spot ONE SC	anthracite
4007841 058616	Spot ONE S	anthracite

Without motion detector

4007841 058623	Spot ONE	anthracite

Technical

Spot DUO SC: 2x 512 lm, 14,6 W, 3000 K
Spot ONE SC: 512 lm, 7,9 W, 3000 K

90° sensor with 10 m range, wall mounting, mounting height max. 2.50 m, aluminium housing, IP44, networking and adjustment via Bluetooth, adjustable continuous light 4h, GU10 LED replaceable

This product contains a light source with energy efficiency class F

Spot Garden SC

Flexible garden lighting. Intelligent presence.

Connect | Sensor | On

GU 10
Replaceable light bulb



Order details

4007841 058685	Spot Garden SC	anthracite

Without motion detector

4007841 058692	Spot Garden N	anthracite
4007841 068660	Spot Garden	anthracite

Technical

512 lm, 7.9 W, 3000 K, 90° sensor with 10 m range, ground spike mounting, aluminium housing, IP44, networking and adjustment via Bluetooth, adjustable continuous light 4 h, GU10 LED replaceable

This product contains a light source with energy efficiency class F

XLED CAM2 SC

Smart security with light and vision.

Wlan | Cam | Connect | Sensor



Order details

4007841 092603 XLED CAM2 SC anthracite

Technical

2,310 lm, 21 W, 3,000 K, 180° sensor, 10 m, max. mounting height 2 m, 2K camera, intercom, local recording on micro SD, adjustable basic and main light, IP44, aluminium housing

This product contains a light source with energy efficiency class E

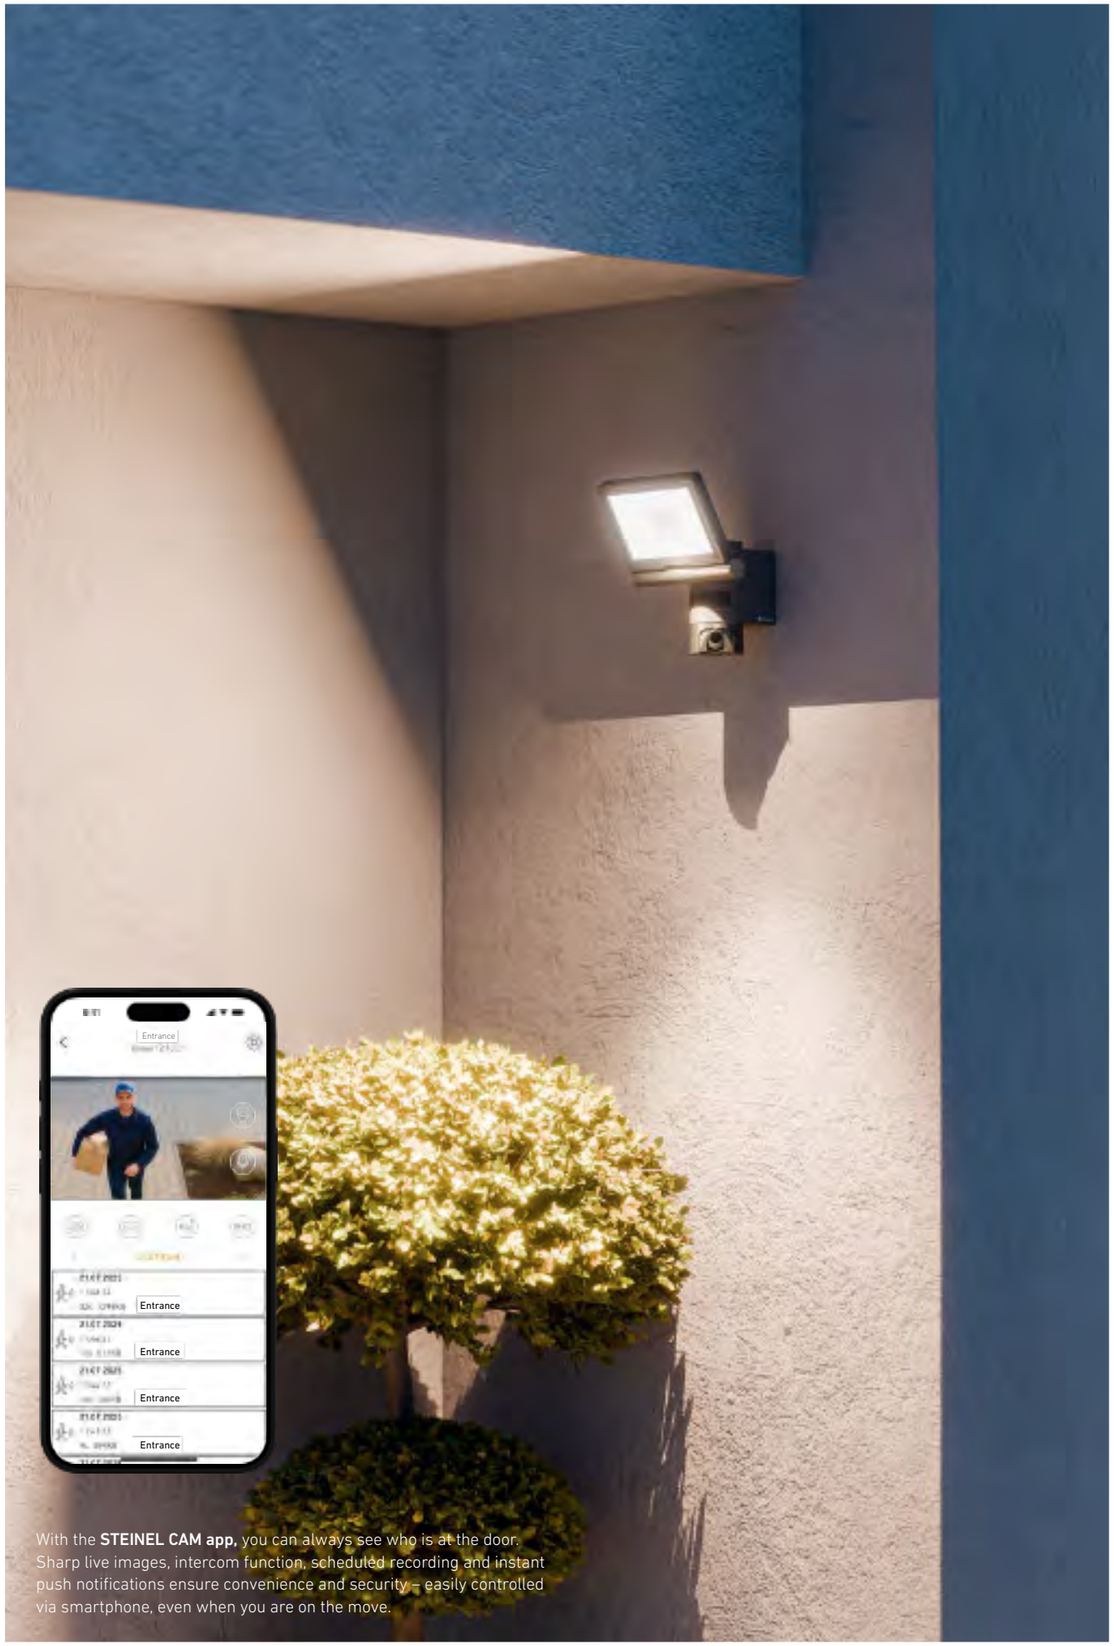

With the **STEINEL CAM app**, you can always see who is at the door. Sharp live images, intercom function, scheduled recording and instant push notifications ensure convenience and security – easily controlled via smartphone, even when you are on the move.

Solar lights – light without limits.

Light without a mains connection – that's the smart idea behind solar lights. Well-lit driveways and paths leading to your entrance give you and your guests a reassuring sense of safety.

The smart solution for lighting with a future.

XSolar L-S

Function meets freedom.

Solar | Sensor

silver

white

XSolar L-S ONE
anthracite



XSolar L-S

4007841 671013	silver
4007841 671006	white

XSolar L-S ONE

4007841 081973	anthracite
4007841 081997	white

Technical

150 lm, 1.2 W, 4000 K, sensor 140°, 8 m, mounting height 2 m, 365 days of light per year, no power connection required, optional basic lighting, battery with 60 days of light reserve, solar panel and LED panel can be swivelled horizontally, high-quality monocrystalline solar panel

Professional Line

XSolar GL-S

Solar. Stylish. Carefree.

Solar | Sensor

anthracite

silver



Order details

4007841 085681	XSolar GL-S	anthracite
4007841 671211	XSolar GL-S	silver

Technical

150 lm, 1.2 W, 4000 K, sensor 140° 5 m, 365 days of light per year, no power connection required, optional basic light, battery with 60 days of light reserve, solar panel and LED panel can be swivelled horizontally, high-quality monocrystalline solar panel

XSolar SOL-0 S

When the sun controls everything.

Solar | Sensor

anthracite

silver



Order details

4007841 052959	XSolar SOL-0 S	anthracite
4007841 052652	XSolar SOL-0 S	silver

Technical

273 lm, 3.3 W, 3000 K, 360° sensor, max. Ø 14 m, max. mounting height 2.5 m, 365 days of light per year, no power connection required, optional basic light 3 %, elegant soft light start, high-quality monocrystalline solar panel

XSolar SOL-O | SOL-O HN

The sun charges – your home shines.

Solar | On

XSolar SOL-O

XSolar SOL-O HN



XSolar SOL-O



XSolar SOL-O HN

Order details

4007841 065935	XSolar SOL-O HN	anthracite
4007841 052966	XSolar SOL-O	anthracite

Technical

XSolar SOL-O HN und XSolar SOL-O
0.07 W, 3000 K, with twilight switch, mounting height 2 m, 365 days of light per year, no power connection required, light switches on automatically in the evening and off in the morning, house number lighting overnight, elegant soft light start, high-quality monocrystalline solar panel

XSolar LH-N

Home begins with light.

Solar | On

anthracite

stainless steel



Order details

4007841 035730	XSolar LH-N	anthracite
4007841 007140	XSolar LH-N	stainless steel

Technical

0.03 W, 4000 K, with twilight switch, mounting height 2 m, 365 days of light per year, no power connection required, light switches on automatically in the evening and off in the morning, including house number sheet, high-quality monocrystalline solar panel

Motion that keeps an eye on your home.

Whether on the wall of your house, on the fence or around the property – our motion detectors react reliably as soon as something happens. With precise technology, flexible settings and robust construction, they make light control convenient and reliable.

Light that sees and reacts – exactly when you need it.

Professional Line

MD IR N130 | MD IR N270

Its eagle eye sees more.

Connect

white

anthracite

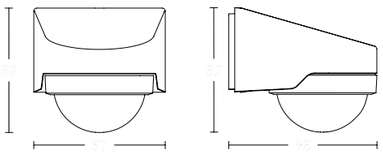

MD IR N130

4007841 069056	MD IR N130	white
4007841 069032	MD IR N130	anthracite

MD IR N270

4007841 079819	COM1	MD IR N270	white
4007841 079796	COM1	MD IR N270	anthracite
4007841 079871	uDIM	MD IR N270	white
4007841 079857	uDIM	MD IR N270	anthracite

Technical

Surface-mounted motion detector with Eagle Eye technology for doubling a selected detection area. Lens can be rotated 180° for range adjustment.

MD IR N130
Range: Radial max. r = 2.5 m (7 m^2) Tangential max. r = 13 m (192 m^2), Mounting height: 1.80 – 4.00 m, COM1: Power: max. 2000 W (LED-ready)

MD IR N270
Range: Radial max. r = 2.7 m (17 m^2) Tangential max. r = 12.5 m (368 m^2), Mounting height: 1.80 – 6.00 m, COM1: Power: max. 2000 W (LED-ready), uDIM: max. 5-100 W LED phase up/down, With uDIM, soft light start and basic light can also be used for conventional luminaires, provided the light source is dimmable

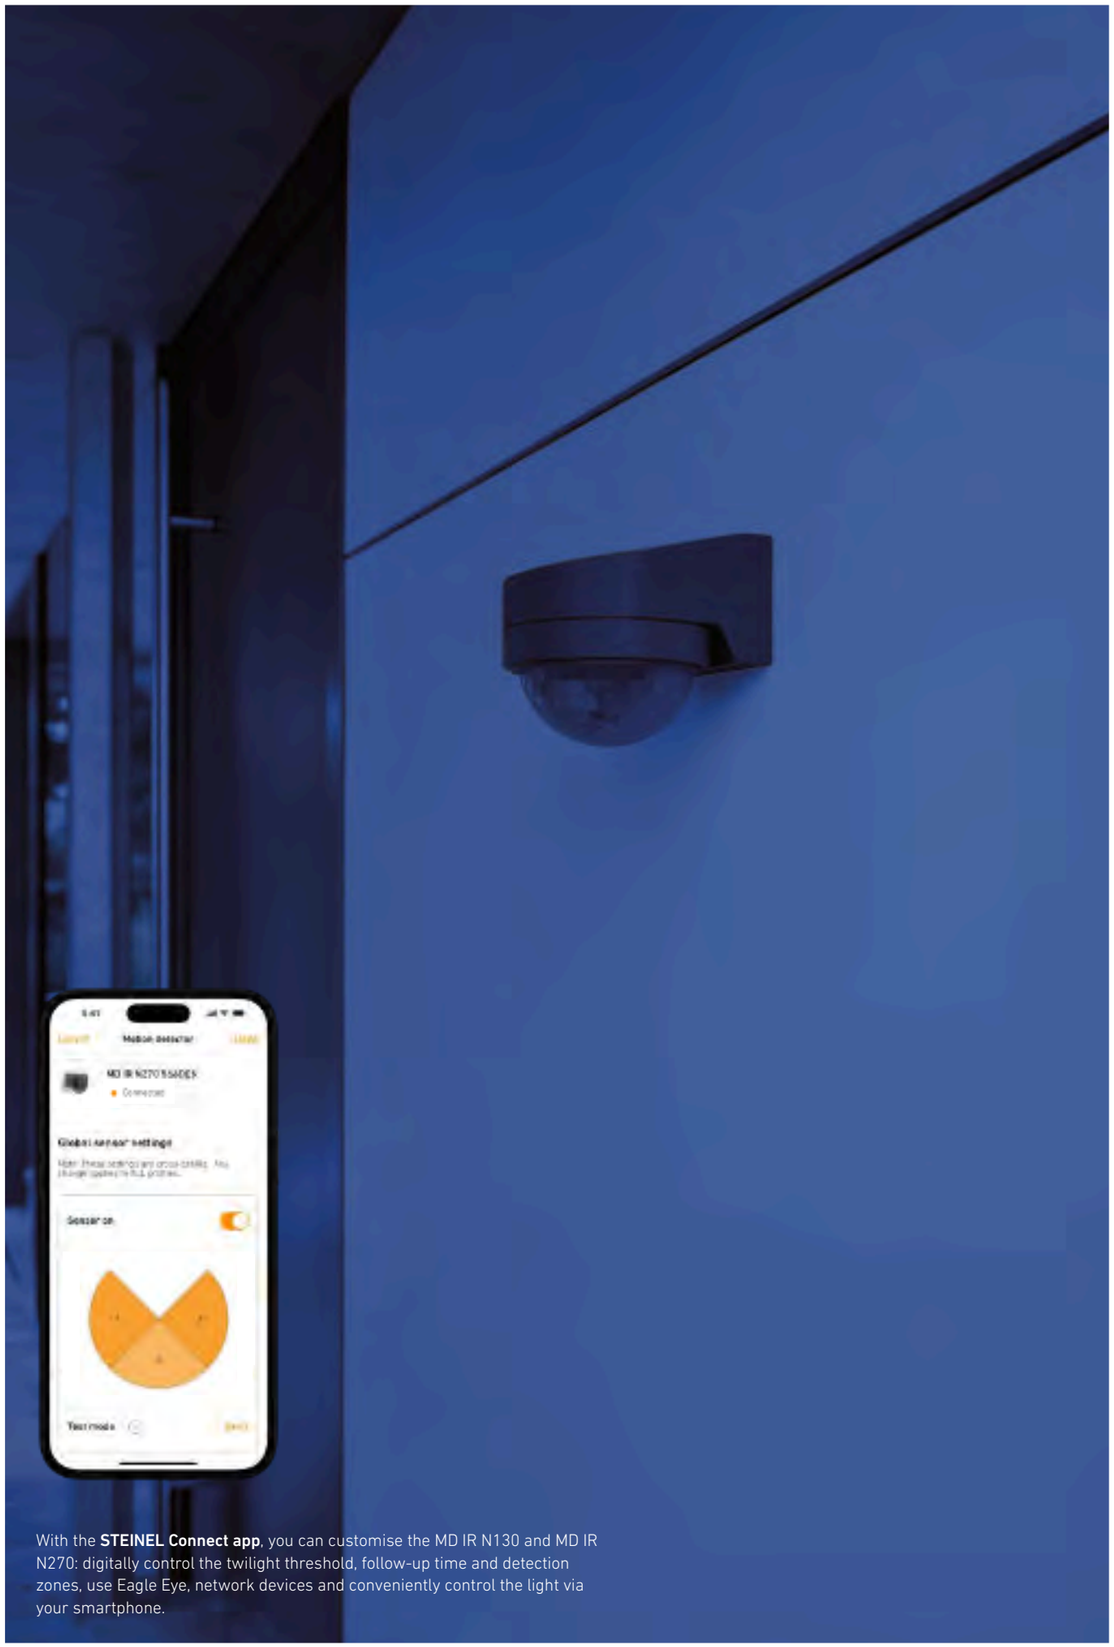

With the **STEINEL Connect app**, you can customise the MD IR N130 and MD IR N270: digitally control the twilight threshold, follow-up time and detection zones, use Eagle Eye, network devices and conveniently control the light via your smartphone.

Professional Line

MD IR D180

Smart detection, precise lighting.

Connect

anthracite

white



Order details

4007841 066109	MD IR D180	white
4007841 066079	MD IR D180	anthracite

Technical

5 pyro sensors, 9 detection zones can be digitally activated/deactivated, range: radial max. r = 6 m (57 m^2) tangential max. r = 9 m (127 m^2), mounting height: 1.80 – 2.50 m, COM1: power: max. 2000 W (LED-ready)

With the **STEINEL Connect app**, you can precisely adjust the MD IR D180: digitally adjust the twilight threshold, follow-up time and range, individually define detection areas, connect devices in the network and conveniently control your outdoor lighting via smartphone.

sensIQ S

The evolution of perfection.

Sensor

white

black

anthracite

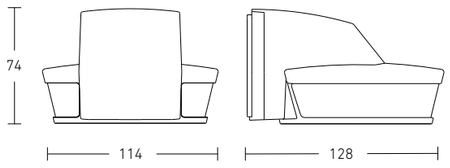

Order details

4007841 034955	COM1	sensIQ S	white
4007841 034979	COM1	sensIQ S	black
4007841 056650	COM1	sensIQ S	anthracite
4007841 059613	KNX V3.1	sensIQ S	white
4007841 059606	KNX V3.1	sensIQ S	black
4007841 059583	KNX V3.1	sensIQ S	anthracite

Technical

PIR system: 4-fold (3 x 100° fields), detection angle: 300° (opening angle 180°), range (tangential): r = 20 m (≈ 1047 m^2), range (radial): r = 4 m (≈ 42 m^2), zones: 3 directions, scalable to the metre (2–20 m, tangential), switching zones: 1360, anti-creep protection: yes, segment masking: possible

STEINEL GmbH
Dieselstraße 80 - 84
33442 Herzebrock - Clarholz
Germany

Telephone + 49 (0) 5245-448-0
www.steinel.de
youtube.com/steinelgmbh
https://www.xing.com/pages/steinelgmbh

Quotations
Telefon + 49 (0) 5245-448-497
eMail angebote-egh@steinel.de

Order acceptance
Telefon + 49 (0) 5245-448-504
eMail bestellungen-egh@steinel.de

Technical back office
Telefon + 49 (0) 5245-448-560
eMail objekte@steinel.de

Contact person for
sensors & lights