

LED outdoor light without sensor

L 271 digi C

without motion detector, with Bluetooth
EAN 4007841 068714
Article number 068714



outdoor light



connectable via
bluetooth

3000 K

3000K warm-white



IP44



5 - 100% basic
brightness



Timer



Light source not
exchangeable



Control gear not
exchangeable



CE

3 years

manufacturer's
warranty steinel.de/
garantie

Function description

Revolutionary digital. LED outdoor light L 271 digi C from the STEINEL Connect series. Connectable via Bluetooth. Adjustable via app. 566 lm, 6,6 W, 3000 K. With main light and soft light start as well as scheduling function. Made of high-quality aluminium. Also available as L 271 digi SC version with sensor.

Technical specifications

Dimensions (L x W x H)	65 x 116 x 235 mm
With lamp	Yes, STEINEL LED system
Manufacturer's Warranty	3 years
With remote control	No
Version	without motion detector, with Bluetooth
PU1, EAN	4007841068714
Application, place	Outdoors
Application, room	garden, front door, all round the building, terrace / balcony
Colour	Anthracite
includes sheet of self-adhesive numbers	No
Package content	1
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	II

Housing material	Aluminium
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Output	6,6 W
Average rated life expectancy of power supply unit at 25°C	> 60000 h
Luminous flux total product	566 lm
Measured luminous flux (360°)	566 lm
Total product efficiency	85 lm/W
Colour temperature	3000 K
Lamp	LED cannot be replaced
Continuous light	selectable
Interconnection	Yes
Interconnection via	Bluetooth Mesh
Colour Rendering Index CRI	= 82
Product category	LED outdoor light without sensor

<https://www.steinel.de>

Subject to technical modifications

09.2026 Page 1 from 2

LED outdoor light without sensor

L 271 digi C

without motion detector, with Bluetooth

EAN 4007841 068714

Article number 068714



Technical specifications


Ambient temperature from -10 up to 40 °C

Accessories

EAN 4007841 088620

Wireless pushbutton TapDuo C

Dimension Drawing

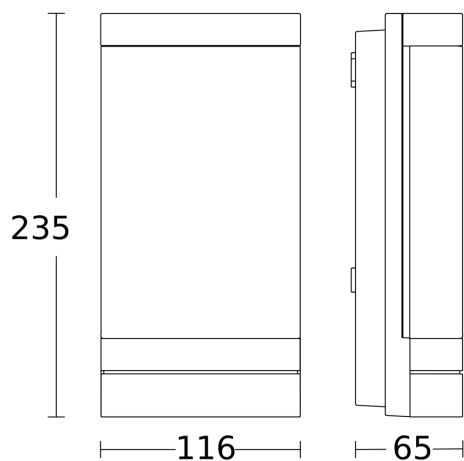

Circuit diagram Bluetooth

