


Sensor-switched LED outdoor light

L 710 S

Anthracite

EAN 4007841 053185

Article number 053185

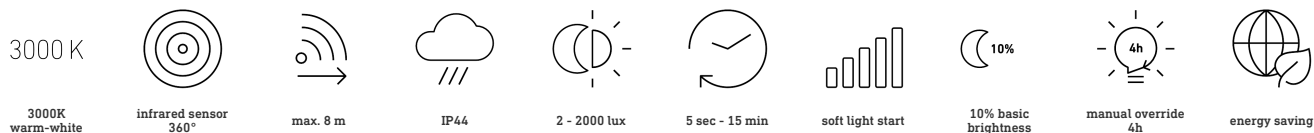

Function description

Luminous design at the height of the times. The L 710 S outdoor luminaire scores with its groundbreaking design. The futuristic shape of the luminaire in combination with the elegant light pattern creates a unique light image. The warm white light (3000 K) harmoniously rounds off the sculptural overall appearance. The L 710 S outdoor luminaire is equipped with an intelligent 360° infrared sensor and has four sensor programmes including night light functions and soft light start. In continuous light mode, the L 710 S shines for four hours. With the LN 710 S, a second version without motion detector is available. This version is equipped with a twilight switch and offers automatic lighting at night as well as an optional night economy mode.

Sensor-switched LED outdoor light

L 710 S

Anthracite

EAN 4007841 053185

Article number 053185




Technical specifications

Dimensions (L x W x H)	140 x 260 x 77 mm
Mains power supply	220 – 240 V / 50 – 60 Hz
Mounting height max.	2,50 m
Sensor Technology	passive infrared
Output	8,3 W
Interconnection	No
Slave modeselectable	No
Luminous flux	729 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Colour Rendering Index	80-89
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED life expectancy (25 °C)	> 60000 h
Base	without
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No

Reach, radial	r = 2 m (13 m ²)
Reach, tangential	r = 8 m (201 m ²)
Photo-cell controller	Yes
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Functions	4 programme settings geared to practical needs, can be selected on removable sensor module
Soft light start	Yes
Continuous light	selectable, 4h
Impact resistance	IK03
IP-rating	IP44
Protection class	II
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, opal
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Cover material	sticker
Version	Anthracite
PU1, EAN	4007841053185

Detection Zone

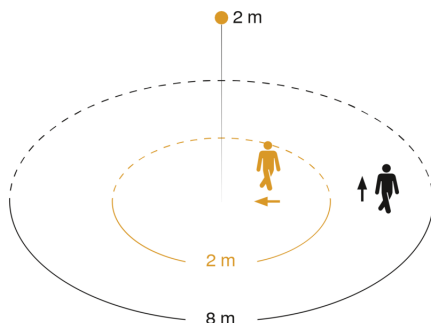

Mögliche Montagehöhe: 1,80 m – 2,50 m

Orange: radial

Schwarz: tangential

Dimension Drawing

